

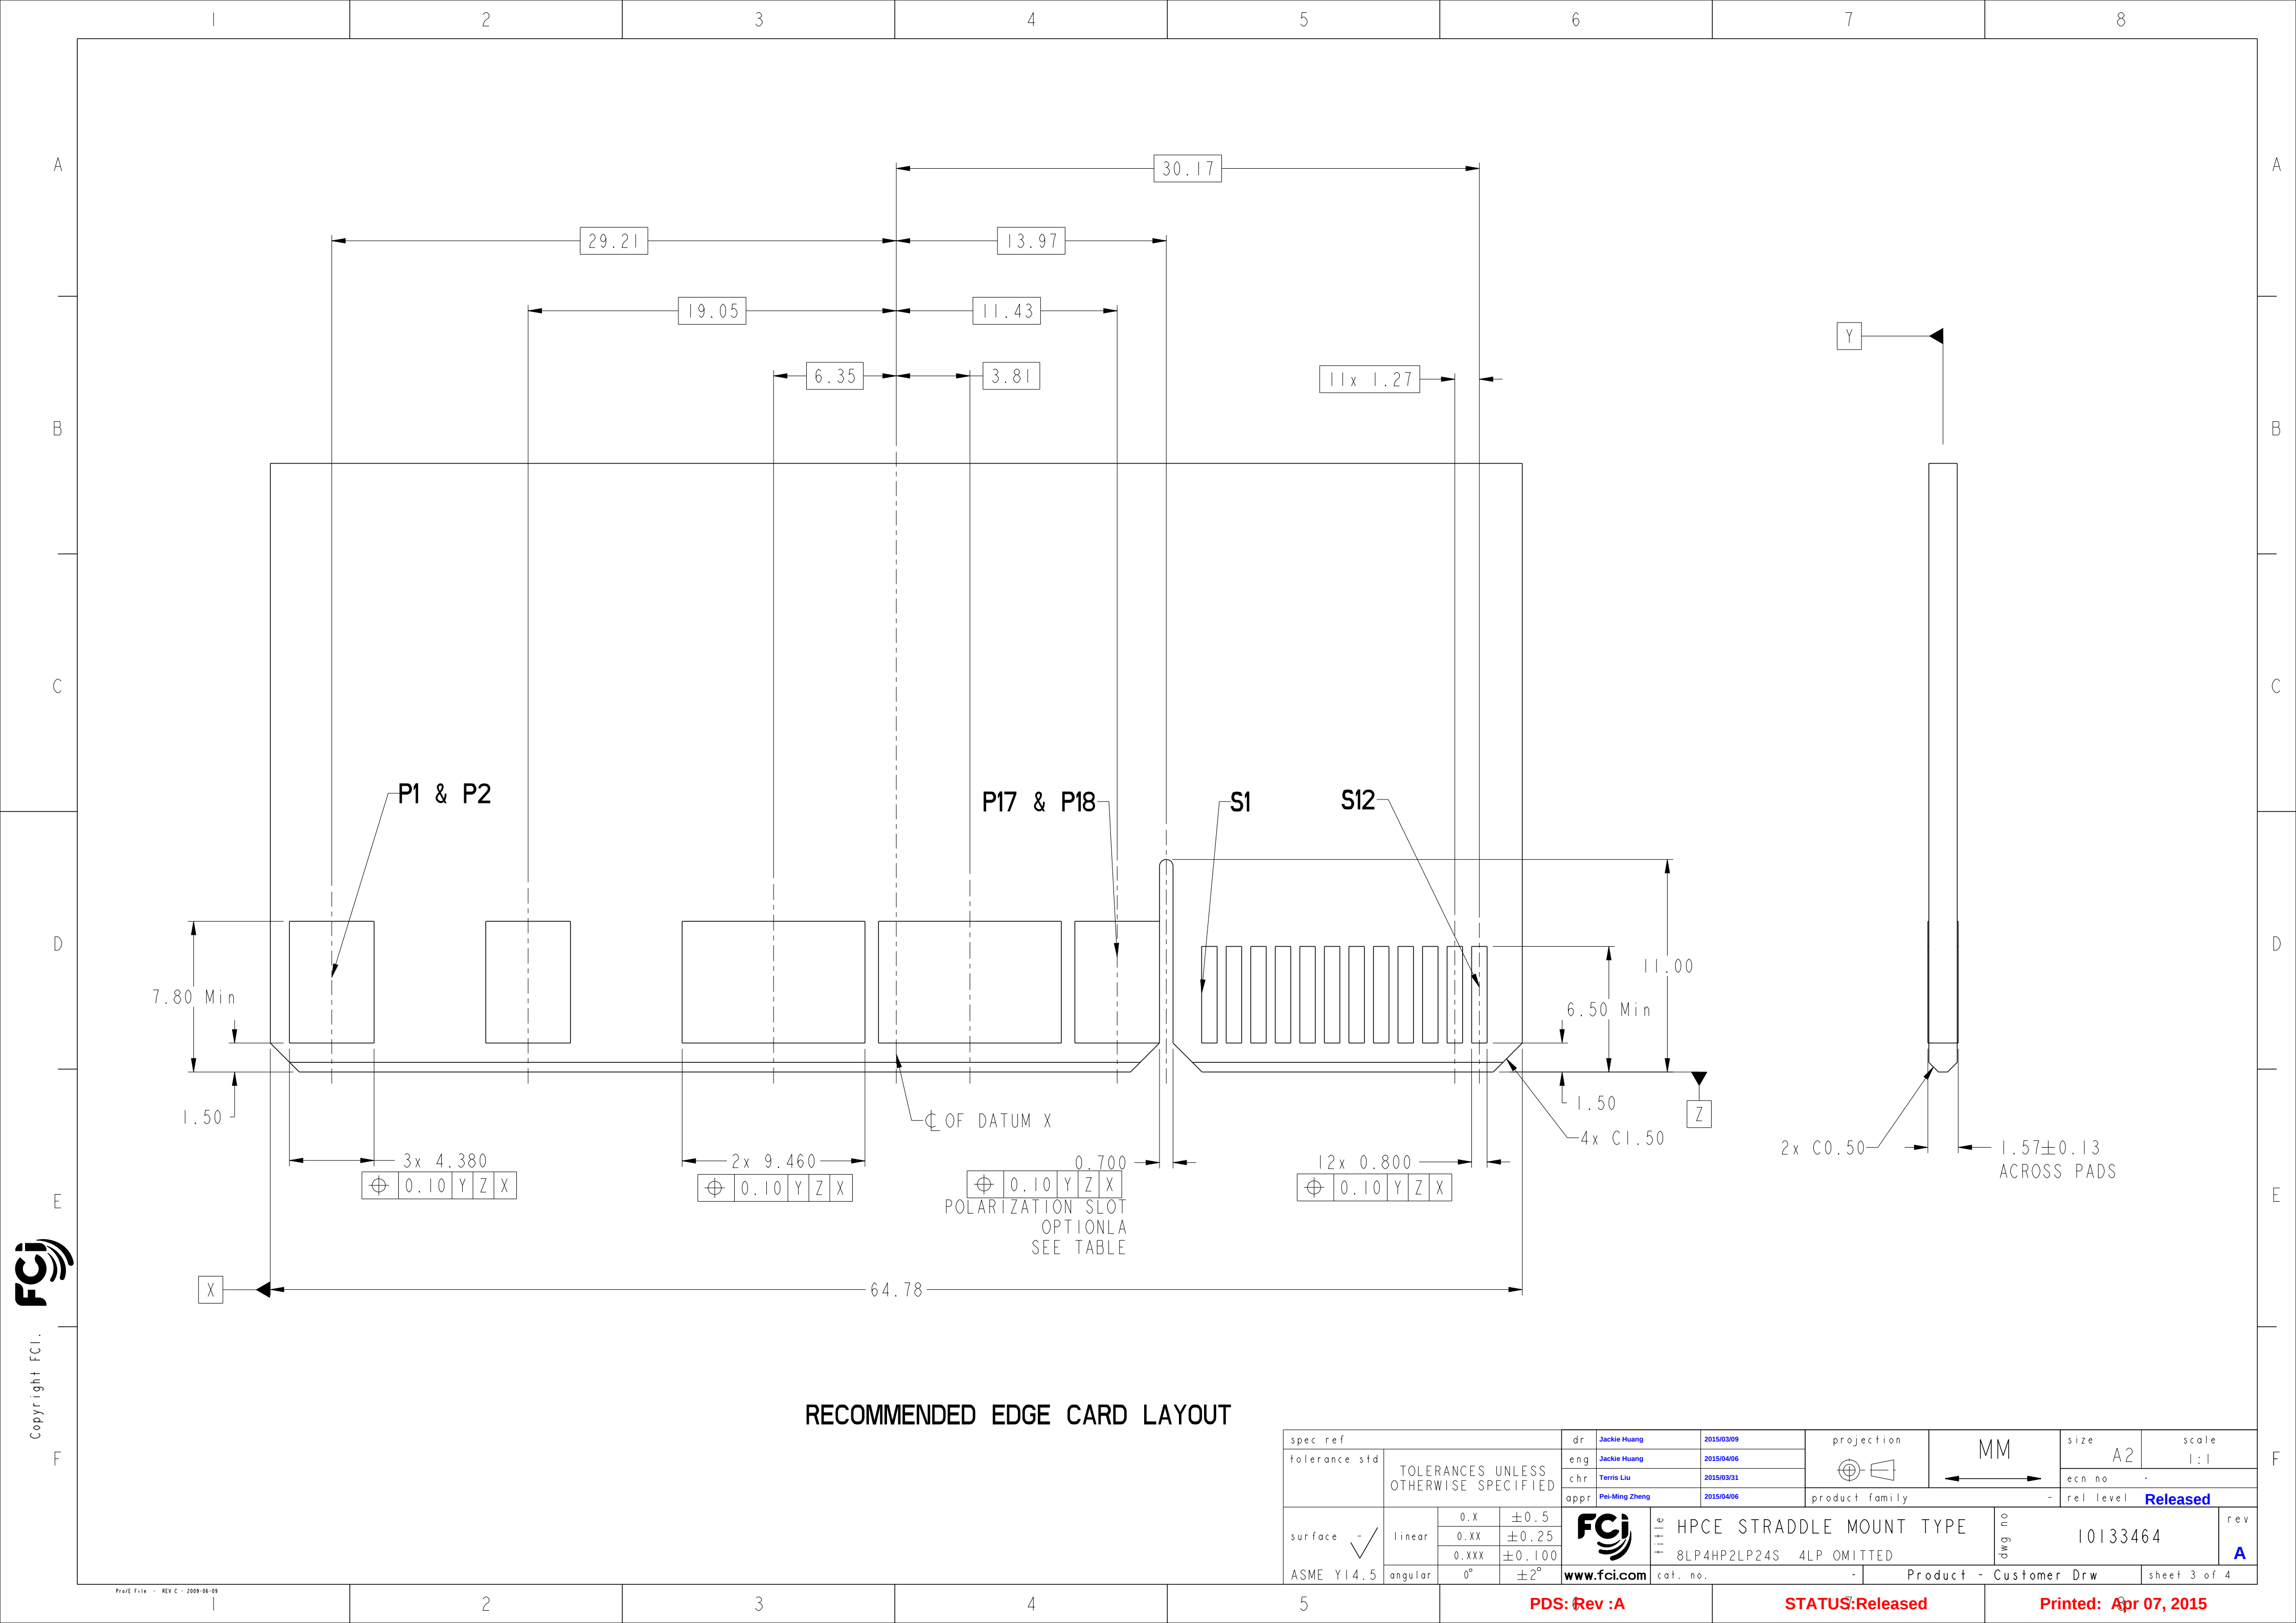





RECOMMENDED EDGE CARD LAYOUT

spec ref		dr		Jackie Huang	2015/03/09	projection 	MM 	size	A2	scale	1:1	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng		Jackie Huang	2015/04/06			ecn no	-	rel level	Released	
		chr		Terris Liu	2015/03/31							
		appr		Pei-Ming Zheng	2015/04/06							
						product family						
surface - / 		linear	0.X	±0.5		title	HPCE STRADDLE MOUNT TYPE 8LP4HP2LP24S 4LP OMITTED		dwg no	10133464		rev A
	0.XX		±0.25									
	0.XXX		±0.100									
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.		-		Product - Customer Drw		sheet 3 of 4	

PART NUMBER	FEATURE C HOST BOARD ALIGNMENT KEY (SEE NOTE 8)	FEATURE A MOUNTING EARS	FEATURE B FRONT POLARIZATION KEY
I0133464-001LF	NO	YES	YES
I0133464-002LF	NO		NO
I0133464-003LF	YES		NO
I0133464-004LF	YES		YES

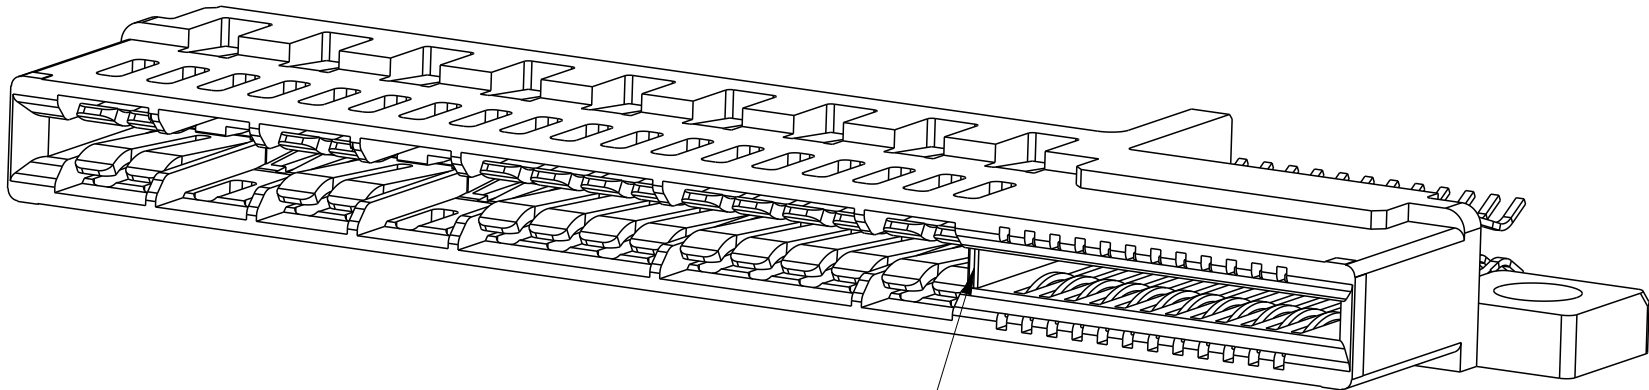


FEATURE B

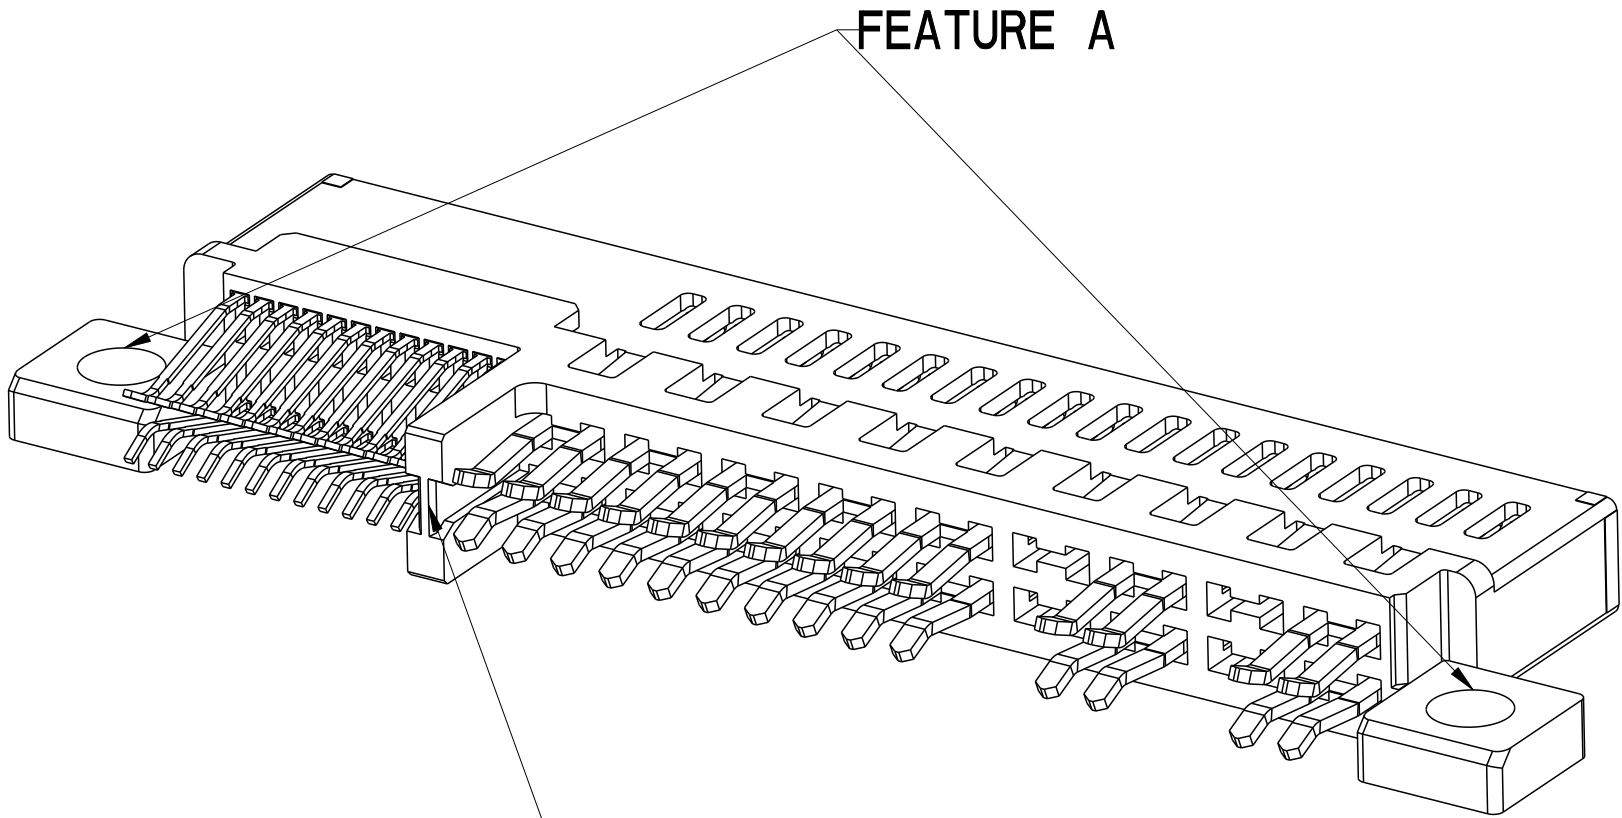

FEATURE A

FEATURE C

- NOTES:
- CONNECTOR MATERIALS:
HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK
UL 94V-0 COMPLIANT
CONTACTS: HIGH PERFORMANCE COPPER ALLOY.
 - CONTACT FINISH REF. GS-12-604 SECTION 5.2.
 - PRODUCT SPECIFICATION: GS-12-604.
 - APPLICATION SPECIFICATION: GS-20-128.
 - PRODUCT MARKING (FCI - PART NUMBER & DATE CODE) ON HOUSING IN AREA SHOWN.
 - PACKAGING MEETS FCI SPECIFICATION GS-14-937.
 - HOUSING COMPONENT WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 60 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.
 - HOST BOARD ALIGNMENT KEY IS RECOMMENDED TO ENSURE PROPER ALIGNMENT OF SOLDER TAILS WITH HOST BOARD PADS.

spec ref		dr		Jackie Huang	2015/03/09	projection 	MM 	size	A2	scale	1:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng		Jackie Huang	2015/04/06			ecn no		-	
		chr		Terris Liu	2015/03/31			rel level		Released	
appr		Pei-Ming Zheng	2015/04/06	product family		-					
surface ✓		linear	0.X	±0.5		title	HPCE STRADDLE MOUNT TYPE 8LP4HP2LP24S 4LP OMITTED	dwg no	I0133464	rev	A
			0.XX	±0.25							
	ASME Y14.5	0.XXX	±0.100								
angular		0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw		sheet 4 of 4		