
PART NUMBER**54F161^B2A**

Rochester Electronics**Manufactured Components**

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All re-creations are done with the approval of the Original Component Manufacturer. (OCM)

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-38535
 - Class Q Military
 - Class V Space Level

Qualified Suppliers List of Distributors (QSLD)

- Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OCM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

INCH-POUND

MIL-M-38510/343B

7 April 2004

SUPERSEDING

MIL-M-38510/343A

21 September 1989

MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED SCHOTTKY TTL,
BINARY COUNTERS, MONOLITHIC SILICON

Reactivated after 7 April 2004 and may be used for either new or existing design acquisition.

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and MIL-PRF 38535

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, advanced Schottky TTL, binary counter microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided for each type and are reflected in the complete part number. For this product, the requirements of MIL-M-38510 have been superseded by MIL-PRF-38535, (see 6.3).

1.2 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-38535, and as specified herein.

1.2.1 Device types. The device types are as follows:

<u>Device type</u>	<u>Circuit</u>
01	Synchronous 4 - bit binary counter (asynchronous master reset)
02	Synchronous 4 - bit binary counter (synchronous reset)
03	Synchronous 4 - bit up/down binary counter (with mode control)
04	Synchronous 4 - bit up/down binary counter (asynchronous master reset)

1.2.2 Device class. The device class is the product assurance level as defined in MIL-PRF-38535.

1.2.3 Case outlines. The case outlines are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
E	GDIP1-T16 or CDIP2-T16	16	Dual-in-line
F	GDFP2-F16 or CDFP3-F16	16	Flat pack
X	CQCC2-N20 20	Square leadless chip carrier	
2	CQCC1-N20 20	Square leadless chip carrier	

Comments, suggestions, or questions on this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAS, 3990 East Broad St., Columbus, OH 43216-5000, or emailed to bipolar@dscclia.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil.

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 V dc to +7.0 V dc
Input voltage range	-1.2 V dc at -18 mA to +7.0 V dc
Storage temperature range	-65° to +150°C
Maximum power dissipation, per device (P_D) <u>1/</u>	
Device types 01, 02, 03, 04	303 mW
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction to case (θ_{JC}):	(See MIL-STD-1835)
Junction temperature (T_J) <u>2/</u>	175°C

1.4 Recommended operating conditions.

Supply voltage (V_{CC})	4.5 V dc minimum to 5.5 V dc maximum
Minimum high level input voltage (V_{IH})	2.0 V dc
Maximum low level input voltage (V_{IL})	0.8 V dc
Normalized fanout (each output) <u>3/</u>	
Low logic level	33 maximum
High logic level	50 maximum
Case operating temperature range (T_C)	-55° to +125°C
Width of clock pulse, high ($\overline{PE}$ = High)	
Device types 01, 02	9.0 ns minimum
Width of clock pulse, high ($\overline{PE}$ = Low)	
Device types 01, 02	7.0 ns minimum
Width of clock pulse, low ($\overline{PE}$ = High)	
Device types 01, 02	8.0 ns minimum
Width of clock pulse, low ($\overline{PE}$ = Low)	
Device types 01, 02	9.0 ns minimum
Width of master reset pulse, low ($\overline{MR}$ = low)	
Device type 01	9.5 ns minimum
Width of $\overline{PL}$ pulse low:	
Device type 03	8.5 ns minimum
Device type 04	7.5 ns minimum
Width of clock pulse low:	
Device type 03	7.0 ns minimum
Width of CPU or CPD pulse low	
Device type 04	7.0 ns minimum
Width of master reset pulse, high ($\overline{MR}$ = high)	
Device type 04	6.0 ns minimum
Width of CPU or CPD pulse, low (change of direction)	
Device type 04	12.0 ns minimum
Setup time P_n high to clock pulse	
Device types 01, 02	5.5 ns minimum
Setup time P_n low to clock pulse	
Device types 01, 02	5.5 ns minimum
Setup time $\overline{PE}$ or $\overline{SR}$ high to clock pulse	
Device types 01, 02	13.5 ns minimum
Setup time $\overline{PE}$ or $\overline{SR}$ low to clock pulse	
Device types 01, 02	10.5 ns minimum

1/ Must withstand the added P_D due to short-circuit test (e.g., I_{OS}).2/ Maximum junction temperature shall not be exceeded except in accordance with allowable short duration burn-in screening condition in accordance with MIL-PRF-38535.3/ The device shall fanout in both high and low levels to the specified number of inputs of the same device type as that being tested.

Setup time CEP or CET high to clock pulse	
Device types 01, 02	13.0 ns minimum
Setup time CEP or CET low to clock pulse	
Device types 01, 02	7.5 ns minimum
Setup time $\overline{U}/D$ high to clock pulse	
Device type 03	12.0 ns minimum
Setup time $\overline{U}/D$ low to clock pulse	
Device type 03	12.0 ns minimum
Setup time Pn high to $\overline{PL}$	
Device types 03, 04	6.0 ns minimum
Setup time Pn low to $\overline{PL}$	
Device types 03, 04	6.0 ns minimum
Setup time $\overline{CE}$ low to clock pulse	
Device type 03	10.5 ns minimum
Hold time Pn high to clock pulse	
Device types 01, 02	2.5 ns minimum
Hold time Pn low to clock pulse	
Device types 01, 02	2.5 ns minimum
Hold time $\overline{PE}$ or $\overline{SR}$ high to clock pulse	
Device types 01, 02	2.0 ns minimum
Hold time $\overline{PE}$ or $\overline{SR}$ low to clock pulse	
Device types 01, 02	0.0 ns minimum
Hold time CEP or CET high to clock pulse	
Device types 01, 02	2.0 ns minimum
Hold time CEP or CET low to clock pulse	
Device types 01, 02	2.0 ns minimum
Hold time Pn low to $\overline{PL}$	
Device types 03, 04	2.0 ns minimum
Hold time $\overline{U}/D$ high to clock pulse	
Device type 03	0.0 ns minimum
Hold time $\overline{U}/D$ low to clock pulse	
Device type 03	0.0 ns minimum
Hold time $\overline{CE}$ low to clock pulse	
Device type 03	0.0 ns minimum
Recovery time master reset to clock pulse	
Device type 01	6.0 ns minimum
Recovery time $\overline{PL}$ to clock pulse	
Device type 03	7.5 ns minimum
Recovery time master reset to CPU or CPD	
Device type 04	4.5 ns minimum
Recovery time $\overline{PL}$ to CPU or CPD	
Device type 04	8.0 ns minimum

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications and Standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-38535 - Integrated Circuits (Microcircuits) Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard for Microelectronics.
MIL-STD-1835 - Interface Standard Electronic Component Case Outlines

(Copies of these documents are available online at <http://assist.daps.dla.mil/quicksearch/> or www.dodssp.daps.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Microcircuits furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.3 and 6.4).

3.2 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein.

3.3.1 Terminal connections. The terminal connections shall be as specified on figures 1.

3.3.2 Logic diagram. The logic diagram shall be as specified on figure 2.

3.3.3 Truth table. The truth table shall be as specified on figure 3.

3.3.4 Schematic circuits. The schematic circuits shall be maintained by the manufacturer and made available to the qualifying activity and the preparing activity upon request.

3.3.5 Case outlines. The case outlines shall be as specified in 1.2.3.

3.4 Lead material and finish. The lead material and finish shall be in accordance with MIL-PRF-38535 (see 6.6).

3.5 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

3.6 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.7 Marking. Marking shall be in accordance with MIL-PRF-38535.

3.8 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 12 (see MIL-PRF-38535, appendix A).

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not effect the form, fit, or function as described herein.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38535 and shall be conducted on all devices prior to qualification and conformance inspection. The following additional criteria shall apply:

- a. The burn-in test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.
- b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.
- c. Additional screening for space level product shall be as specified in MIL-PRF-38535.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-38535.

4.4 Technology Conformance Inspection (TCI). Technology conformance inspection shall be in accordance with MIL-PRF-38535 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table III of MIL-PRF-38535 and as follows:

- a. Tests shall be as specified in table II herein.
- b. Subgroups 4, 5, and 6 shall be omitted.
- c. Subgroups 7 and 8 shall verify the truth tables herein.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55^{\circ}\text{C} \leq T_C \leq +125^{\circ}\text{C}$	Device type	Limits		Unit
				Min	Max	
High level output voltage	V_{OH}	$V_{CC} = 4.5\text{ V}$, $V_{IL} = 0.8\text{ V}$, $I_{OH} = -1.0\text{ mA}$, $V_{IH} = 2.0\text{ V}$	All	2.5		V
Low level output voltage	V_{OL}	$V_{CC} = 4.5\text{ V}$, $I_{OL} = 20\text{ mA}$, $V_{IH} = 2.0\text{ V}$, $V_{IL} = 0.8\text{ V}$	All		0.5	V
Input clamp voltage	V_{IC}	$V_{CC} = 4.5\text{ V}$, $I_{IN} = -18\text{ mA}$, $T_C = 25^{\circ}\text{C}$	All		-1.2	V
High level input current	I_{IH1}	$V_{CC} = 5.5\text{ V}$, $V_{IN} = 2.7\text{ V}$	01, 02		40	μA
			03, 04		20	
	I_{IH2}	$V_{CC} = 5.5\text{ V}$, $V_{IN} = 7.0\text{ V}$	All		100	μA
Low level input current	I_{IL1}	$V_{CC} = 5.5\text{ V}$, $V_{IL} = 0.5\text{ V}$	01, 02	-0.0	-0.6	mA
			03, 04	-.03	-0.6	
	I_{IL2}	$V_{CC} = 5.5\text{ V}$, $V_{IL} = 0.5\text{ V}$	01, 02	-0.0	-1.2	mA
			03, 04	-.09	-1.8	
Short circuit output current <u>1/</u>	I_{OS}	$V_{CC} = 5.5\text{ V}$, $V_{OS} = 0.0\text{ V}$	All	-60	-150	mA
Supply current	I_{CC}	$V_{CC} = 5.5\text{ V}$	All		55	mA
Maximum count frequency	f_{MAX}	$V_{CC} = 5.0\text{ V}$	All	70		MHz
Propagation delay time, CP to Qn	t_{PLH1}	$V_{CC} = 5.0\text{ V}$, $C_L = 50\text{ pF} \pm 10\%$, See figure 4	03	3.0	9.5	ns
CP to Qn	t_{PHL1}		03	5.0	13.5	ns
CPU, CPD to Qn	t_{PLH1}		04	3.0	10.0	ns
CPU, CPD to Qn	t_{PHL1}		04	5.5	14.0	ns
CP to Qn, $\overline{PE} = (\text{high})$	t_{PLH1}		01, 02	2.0	9.0	ns
CP to Qn, $\overline{PE} = (\text{high})$	t_{PHL1}		01, 02	3.5	11.5	ns
CP to TC	t_{PLH2}		03	5.0	16.5	ns
CP to TC	t_{PHL2}		03	4.5	13.5	ns
CPU to $\overline{TCU}$	t_{PLH2}		04	2.5	10.5	ns
CPU to $\overline{TCU}$	t_{PHL2}		04	3.0	9.5	ns

1/ Not more than one output should be shorted at a time.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C ≤ T _C ≤ +125°C	Device type	Limits		Unit
				Min	Max	
Propagation delay time, PL to Qn	t _{PLH3}	V _{CC} = 5.0 V, C _L = 50 pF ± 10%, See figure 4	04	4.0	13.5	ns
PL to Qn	t _{PHL3}		04	5.0	15.0	ns
CPD to TCD	t _{PLH4}		04	2.5	10.5	ns
CPD to TCD	t _{PHL4}		04	3.0	9.5	ns
CP to Qn, PE = (low)	t _{PLH2}		01, 02	2.0	10.0	ns
CP to Qn, PE = (low)	t _{PHL2}		01, 02	3.0	10.0	ns
CP to RC	t _{PLH3}		03	3.0	11.5	ns
CP to RC	t _{PHL3}		03	3.0	12.5	ns
CP to TC	t _{PLH3}		01, 02	4.5	16.5	ns
CP to TC	t _{PHL3}		01, 02	4.0	18.5	ns
Pn to Qn	t _{PLH4}		03	2.0	9.0	ns
Pn to Qn	t _{PHL4}		03	6.0	16.0	ns
Pn to Qn	t _{PLH5}		04	1.5	8.5	ns
Pn to Qn	t _{PHL5}		04	6.0	16.5	ns
CET to TC	t _{PLH4}		01, 02	2.5	9.0	ns
CET to TC	t _{PHL4}		01, 02	2.5	9.0	ns
CE to RC	t _{PLH5}		03	3.0	9.0	ns
CE to RC	t _{PHL5}		03	3.0	9.0	ns
MR to Qn	t _{PHL5}		01	5.5	14.0	ns
MR to TC	t _{PHL6}		01	4.5	14.0	ns
PL to Qn	t _{PLH6}		03	5.0	13.0	ns
PL to Qn	t _{PHL6}		03	5.5	14.5	ns

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C ≤ T _C ≤ +125°C	Device type	Limits		Unit
				Min	Max	
Propagation delay time, MR to $\overline{\text{TCU}}$	t _{PLH6}	V _{CC} = 5.0 V, C _L = 50 pF ± 10%, See figure 4	04	5.0	15.0	ns
MR to $\overline{\text{TCD}}$	t _{PHL6}		04	5.0	16.0	ns
$\overline{\text{U/D}}$ to $\overline{\text{RC}}$	t _{PLH7}		03	7.0	22.5	ns
$\overline{\text{U/D}}$ to $\overline{\text{RC}}$	t _{PHL7}		03	5.5	14.0	ns
MR to Q _n	t _{PHL11}		04	5.0	16.0	ns
$\overline{\text{U/D}}$ to TC	t _{PLH8}		03	4.0	13.5	ns
$\overline{\text{U/D}}$ to TC	t _{PHL8}		03	4.0	12.5	ns
$\overline{\text{PL}}$ to $\overline{\text{TCU}}$	t _{PLH7}		04	6.0	18.5	ns
$\overline{\text{PL}}$ to $\overline{\text{TCU}}$	t _{PHL7}		04	6.0	17.5	ns
$\overline{\text{PL}}$ to $\overline{\text{TCD}}$	t _{PLH8}		04	6.0	18.5	ns
$\overline{\text{PL}}$ to $\overline{\text{TCD}}$	t _{PHL8}		04	6.0	17.5	ns
P _n to $\overline{\text{TCU}}$	t _{PLH9}		04	5.0	16.5	ns
P _n to $\overline{\text{TCU}}$	t _{PHL9}		04	4.5	16.5	ns
P _n to $\overline{\text{TCD}}$	t _{PLH10}		04	5.0	16.5	ns
P _n to $\overline{\text{TCD}}$	t _{PHL10}		04	4.5	16.5	ns
MR to Q _n	t _{PHL11}		04	5.0	16.0	ns

TABLE II. Electrical test requirements.

MIL-PRF-38535 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters	1	1
Final electrical test parameters	1*, 2, 3, 7, 9, 10, 11	1*, 2, 3, 7, 9
Group A test requirements	1, 2, 3, 7, 8, 9, 10, 11	1, 2, 3, 7, 8, 9, 10, 11
Group B electrical test parameters when using the method 5005 QCI option	1, 2, 3, 7, 8, 9, 10, 11	N/A
Group C end-point electrical parameters	1, 2, 3, 7, 8, 9, 10, 11	1, 2, 3
Group D end-point electrical parameters	1, 2, 3	1, 2, 3

*PDA applies to subgroup 1.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of MIL-PRF-38535.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table IV of MIL-PRF-38535 and as follows:

- a. End-point electrical parameters shall be as specified in table II herein.
- b. The steady-state life test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.


4.4.4 Group D inspection. Group D inspection shall be in accordance with table V of MIL-PRF-38535. End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be specified as follows:


4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

Terminal number	Device type 01		Device type 2		Device type 03		Device type 04	
	Case E and F	Case X and 2	Case E and F	Case X and 2	Case E and F	Case X and 2	Case E and F	Case X and 2
1	$\overline{\text{MR}}$	NC	$\overline{\text{SR}}$	NC	P1	NC	P1	NC
2	CP	$\overline{\text{MR}}$	CP	$\overline{\text{SR}}$	Q1	P1	Q1	P1
3	P0	CP	P0	CP	Q0	Q1	Q0	Q1
4	P1	P0	P1	P0	$\overline{\text{CE}}$	Q0	CPD	Q0
5	P2	P1	P2	P1	$\overline{\text{U/D}}$	$\overline{\text{CE}}$	CPU	CPD
6	P3	NC	P3	NC	Q2	NC	Q2	NC
7	CEP	P2	CEP	P2	Q3	$\overline{\text{U/D}}$	Q3	CPU
8	GND	P3	GND	P3	GND	Q2	GND	Q2
9	$\overline{\text{PE}}$	CEP	$\overline{\text{PE}}$	CEP	P3	Q3	P3	Q3
10	CET	GND	CET	GND	P2	GND	P2	GND
11	Q3	NC	Q3	NC	$\overline{\text{PL}}$	NC	$\overline{\text{PL}}$	NC
12	Q2	$\overline{\text{PE}}$	Q2	$\overline{\text{PE}}$	TC	P3	$\overline{\text{TCU}}$	P3
13	Q1	CET	Q1	CET	$\overline{\text{RC}}$	P2	$\overline{\text{TCD}}$	P2
14	Q0	Q3	Q0	Q3	CP	$\overline{\text{PL}}$	MR	$\overline{\text{PL}}$
15	TC	Q2	TC	Q2	P0	TC	P0	$\overline{\text{TCU}}$
16	V _{CC}	NC	V _{CC}	NC	V _{CC}	NC	V _{CC}	NC
17		Q1		Q1		$\overline{\text{RC}}$		$\overline{\text{TCD}}$
18		Q0		Q0		CP		MR
19		TC		TC		P0		P0
20		V _{CC}		V _{CC}		V _{CC}		V _{CC}

FIGURE 1. Terminal connections.

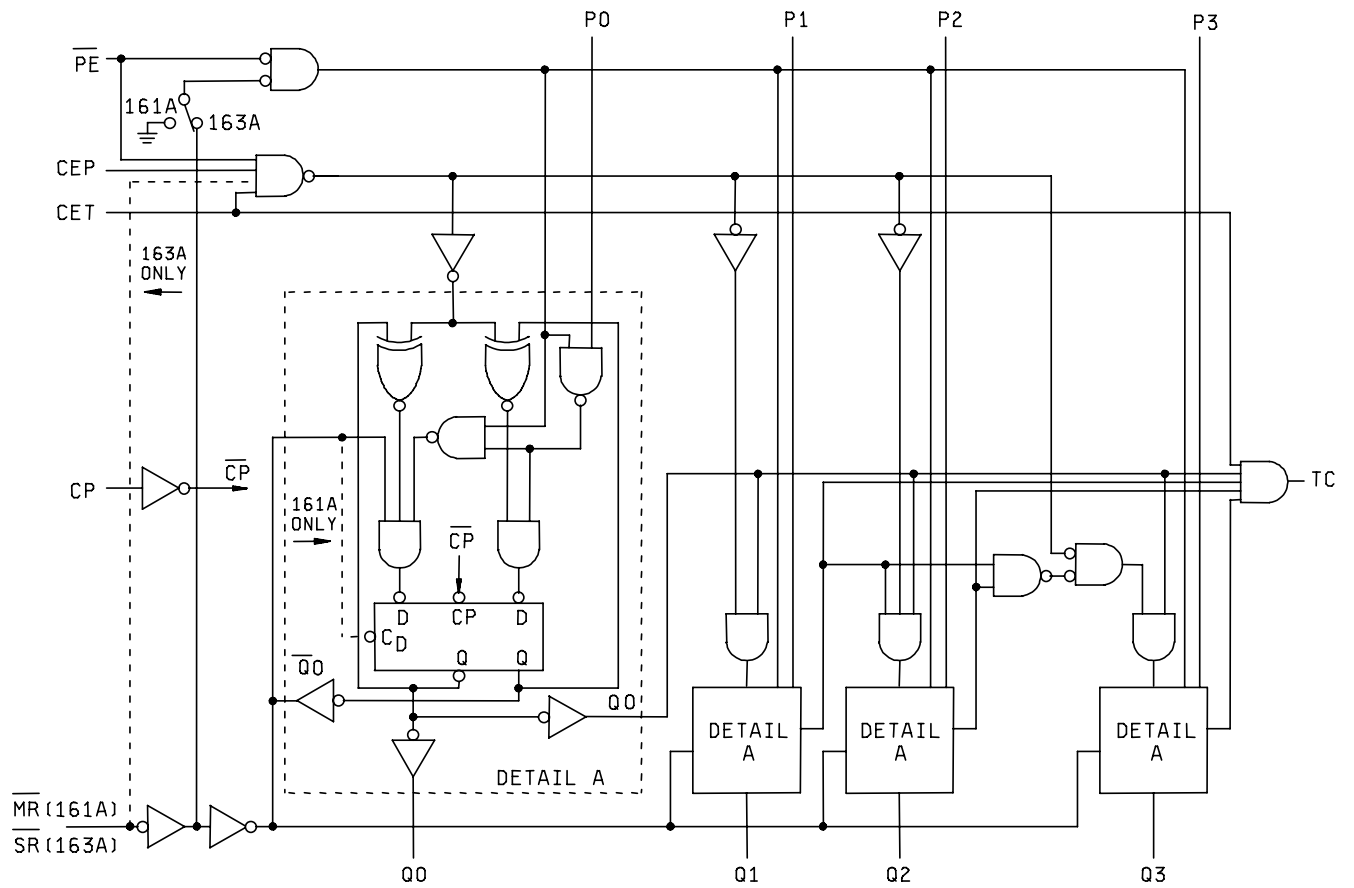Device types 01 and 02FIGURE 2. Logic diagram.

Device type 03

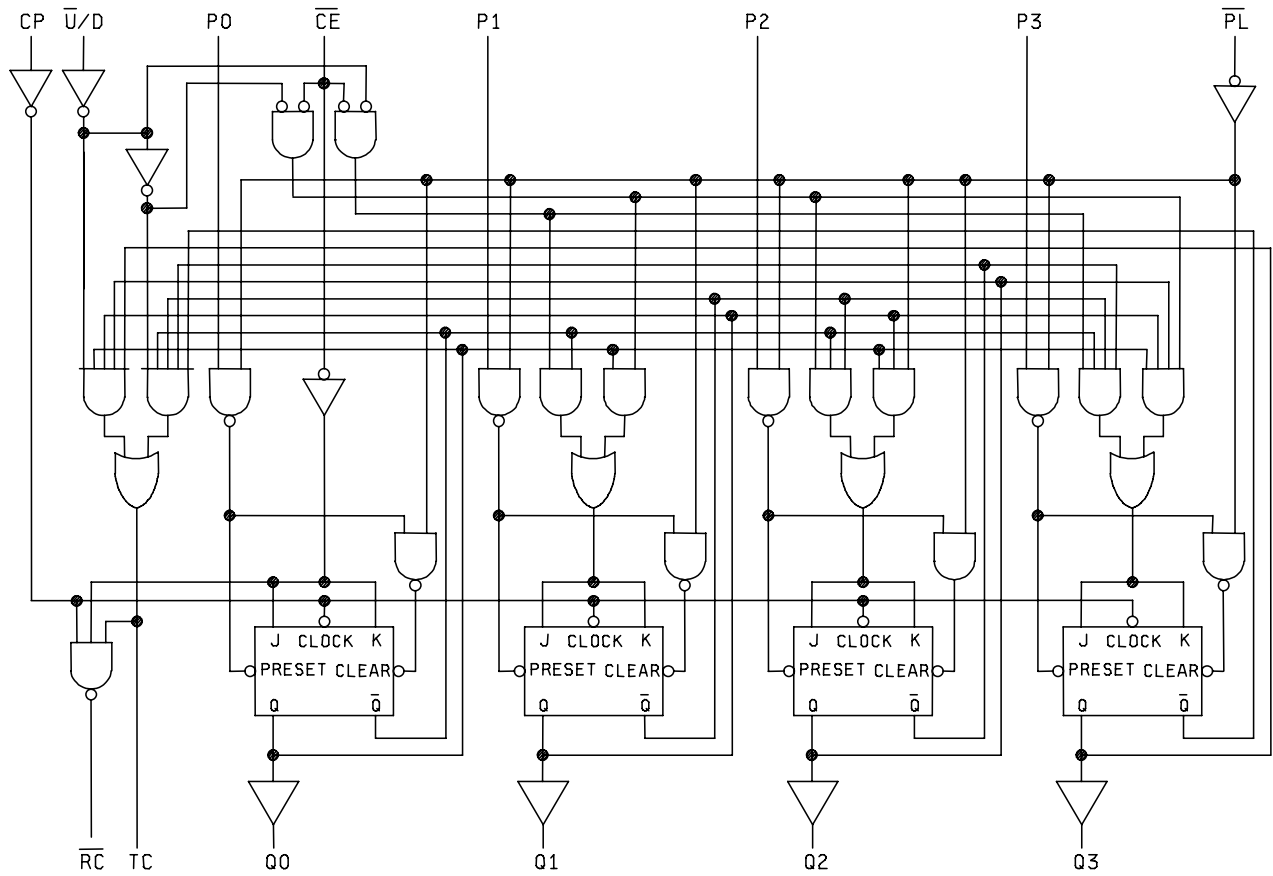FIGURE 2. Logic diagram - Continued.

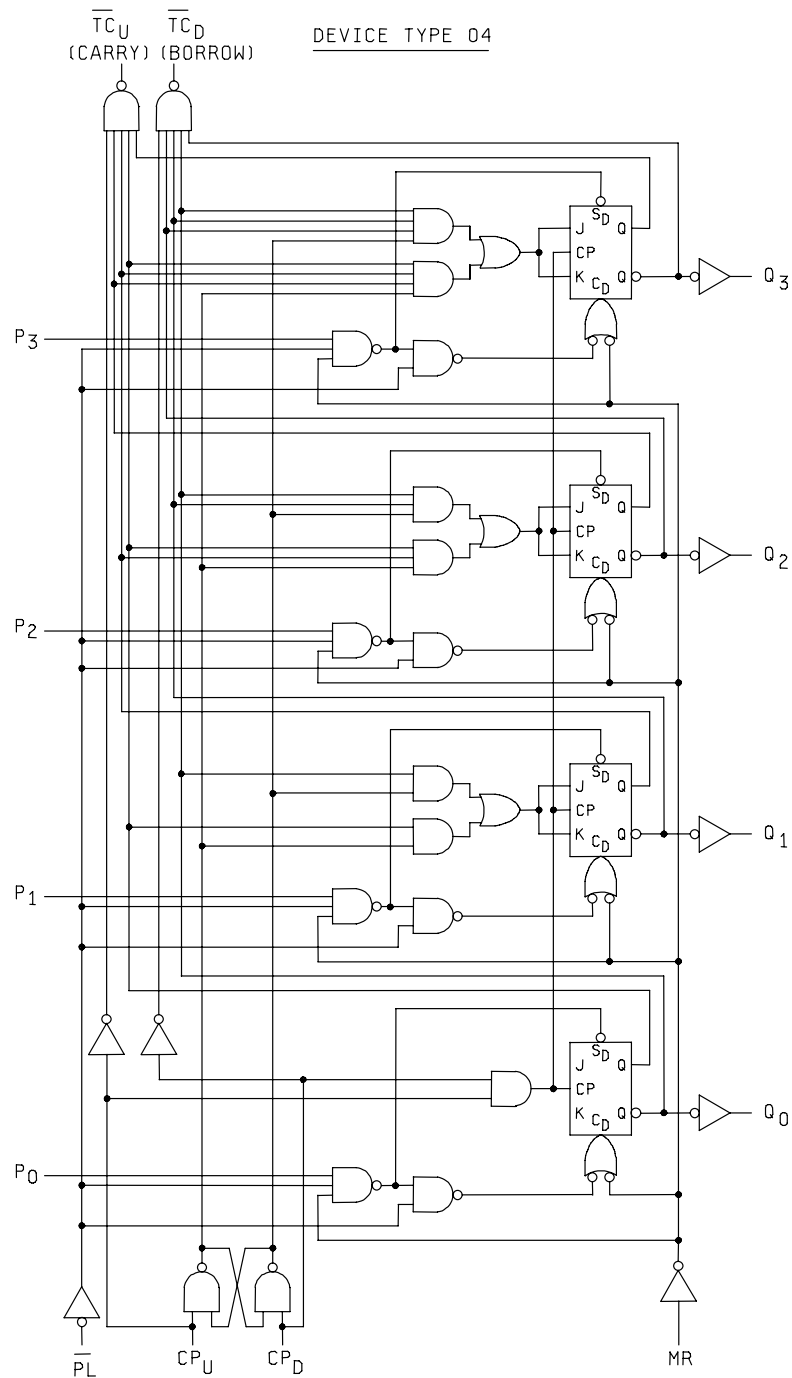


FIGURE 2. Logic diagram - Continued.

Device types 01 and 02

Mode select table

* $\overline{\text{SR}}$	$\overline{\text{PE}}$	CET	CEP	Action on the rising clock edge ($\uparrow$)
L	X	X	X	Reset (clear)
H	L	X	X	Load (Pn - Qn)
H	H	H	H	Count (increment)
H	H	L	X	No change (hold)
H	H	X	L	No change (hold)

* For F163A only
H = High voltage level
L = Low voltage level
X = Immaterial

Device type 03

Mode select table

Inputs				Mode
$\overline{\text{PL}}$	$\overline{\text{CE}}$	$\overline{\text{U/D}}$	CP	
H	L	L	$\uparrow$	Count up
H	L	H	$\uparrow$	Count down
L	X	X	X	Preset (asyn)
H	H	X	X	No change (hold)

RC truth table

Inputs			Output
$\overline{\text{CE}}$	TC*	CP	$\overline{\text{RC}}$
L	H	$\uparrow$	$\uparrow$
H	X	X	H
X	L	X	H

*TC is generated internally
H = High voltage level
L = Low voltage level
X = Immaterial
 $\uparrow$ = Transition from low to high level
 $\downarrow$ = One low level pulse


Device type 04

Function table

MR	$\overline{\text{PL}}$	CPU	CPD	Mode
H	X	X	X	Reset (asyn)
L	L	X	X	Preset (asyn)
L	H	H	H	No change
L	H	$\uparrow$	H	Count up
L	H	H	$\downarrow$	Count down


H = High voltage level
L = Low voltage level
X = Immaterial
 $\uparrow$ = Transition from low to high level


FIGURE 3. Truth table.

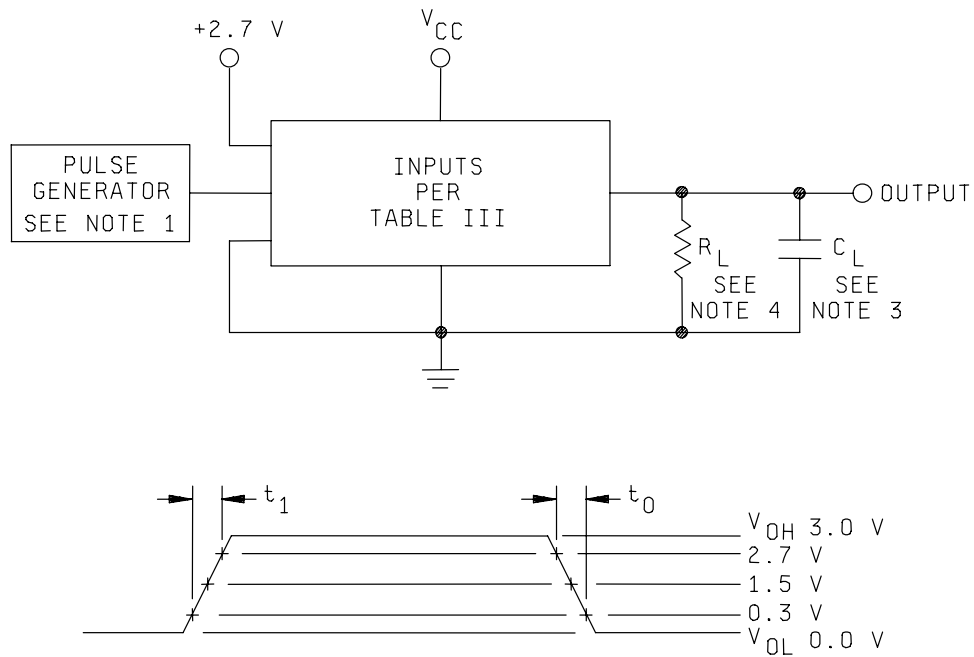**NOTES:**

1. $T_1 = T_0 \leq 2.5 \text{ ns}$, $\text{PRR} \leq 1 \text{ MHz}$, $Z_{\text{OUT}} \approx 50\Omega$.
2. Inputs not under test should be biased per table III.
3. $C_L = 50 \text{ pF} \pm 10\%$ including scope probe, wiring, and stray capacitance without package in test fixture.
4. $R_L = 499\Omega \pm 5\%$.
5. Voltage measurements are to be made with respect to network ground terminal.


FIGURE 4. Switching time waveform.

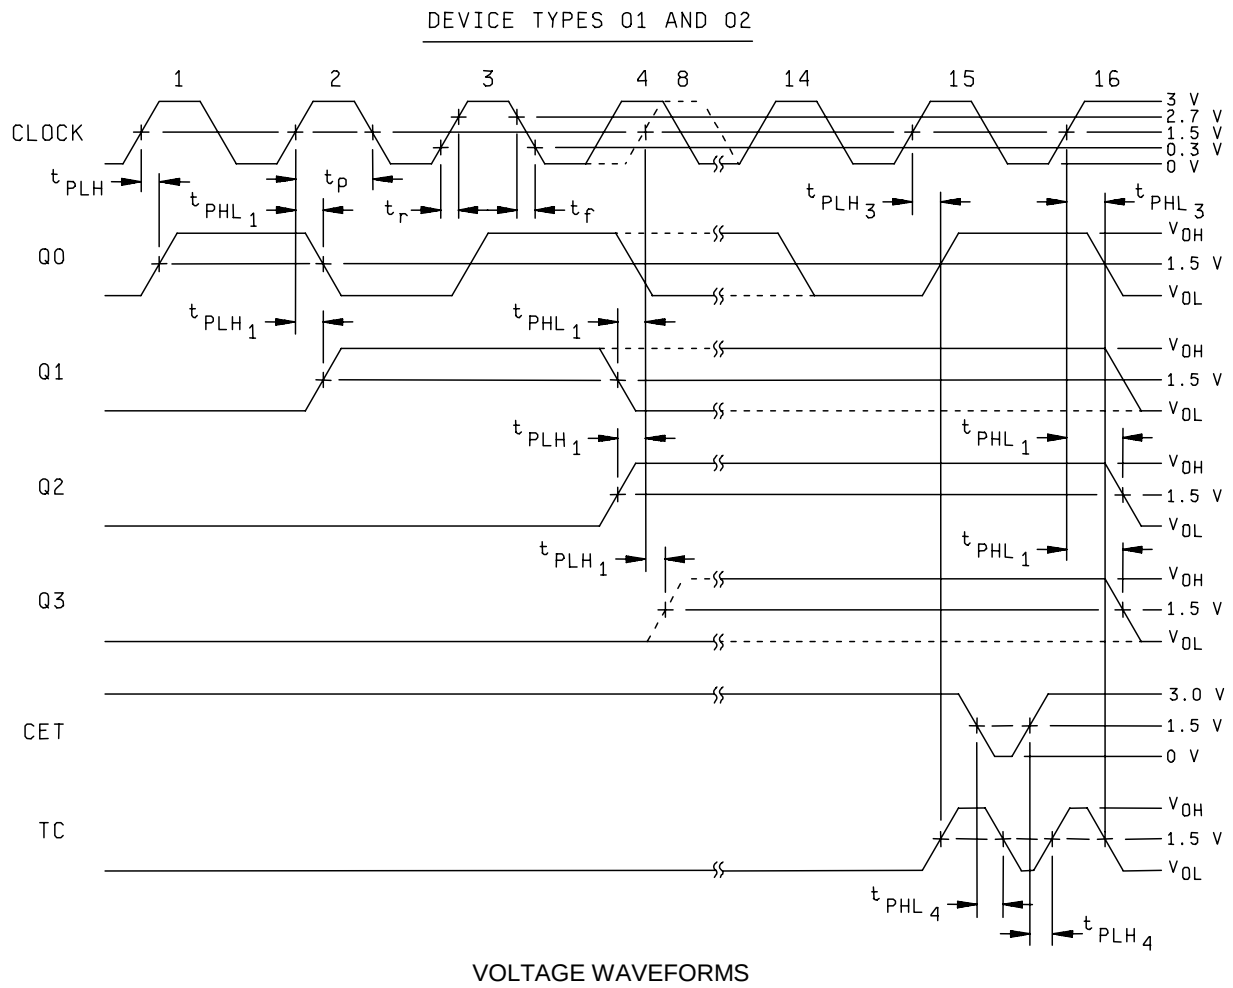
FIGURE 4. Switching time test circuit and waveforms for device types 01 and 02 - Continued.

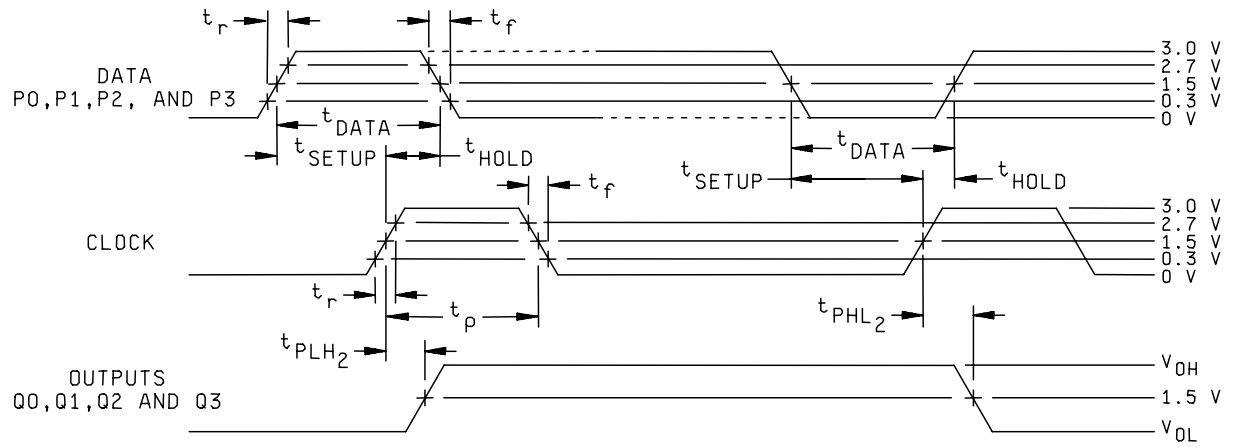

NOTE: The data pulse generator has the following characteristics: $V_{\text{gen}} = 3.0 \text{ V}$, $t_r \leq 2.5 \text{ ns}$, $t_f \leq 2.5 \text{ ns}$, $t_{\text{DATA}} = 8.0 \text{ ns}$, $t_{\text{SETUP}} = 5.5 \text{ ns}$, $t_{\text{HOLD}} = 2.5 \text{ ns}$, $t_{\text{P(CLOCK)}} = 7.0 \text{ ns}$.

FIGURE 4. Switching time test circuit and waveforms for device types 01 and 02 - Continued.

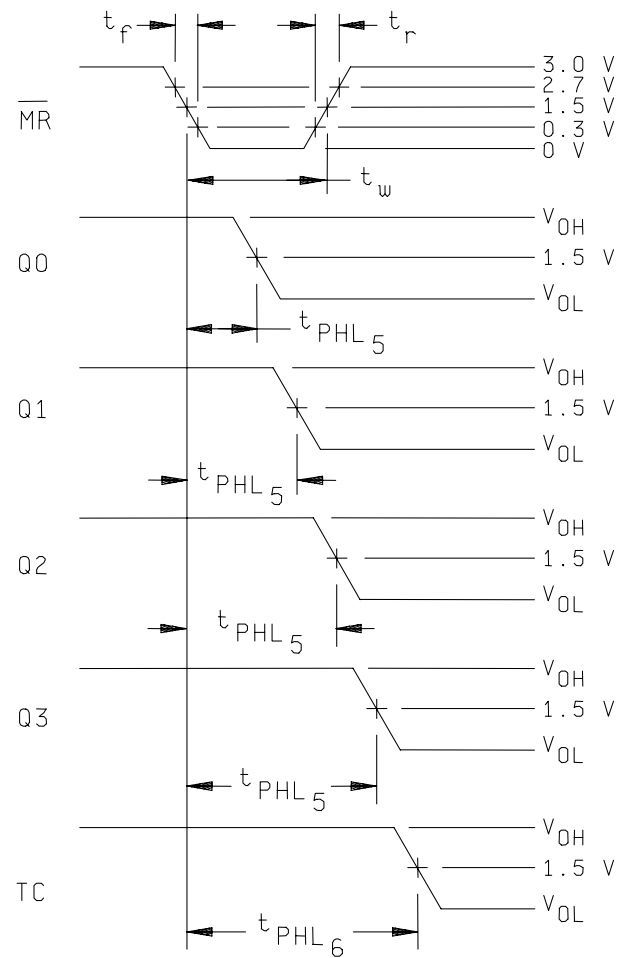FIGURE 4. Switching time test circuit and waveforms for device type 01 - Continued.

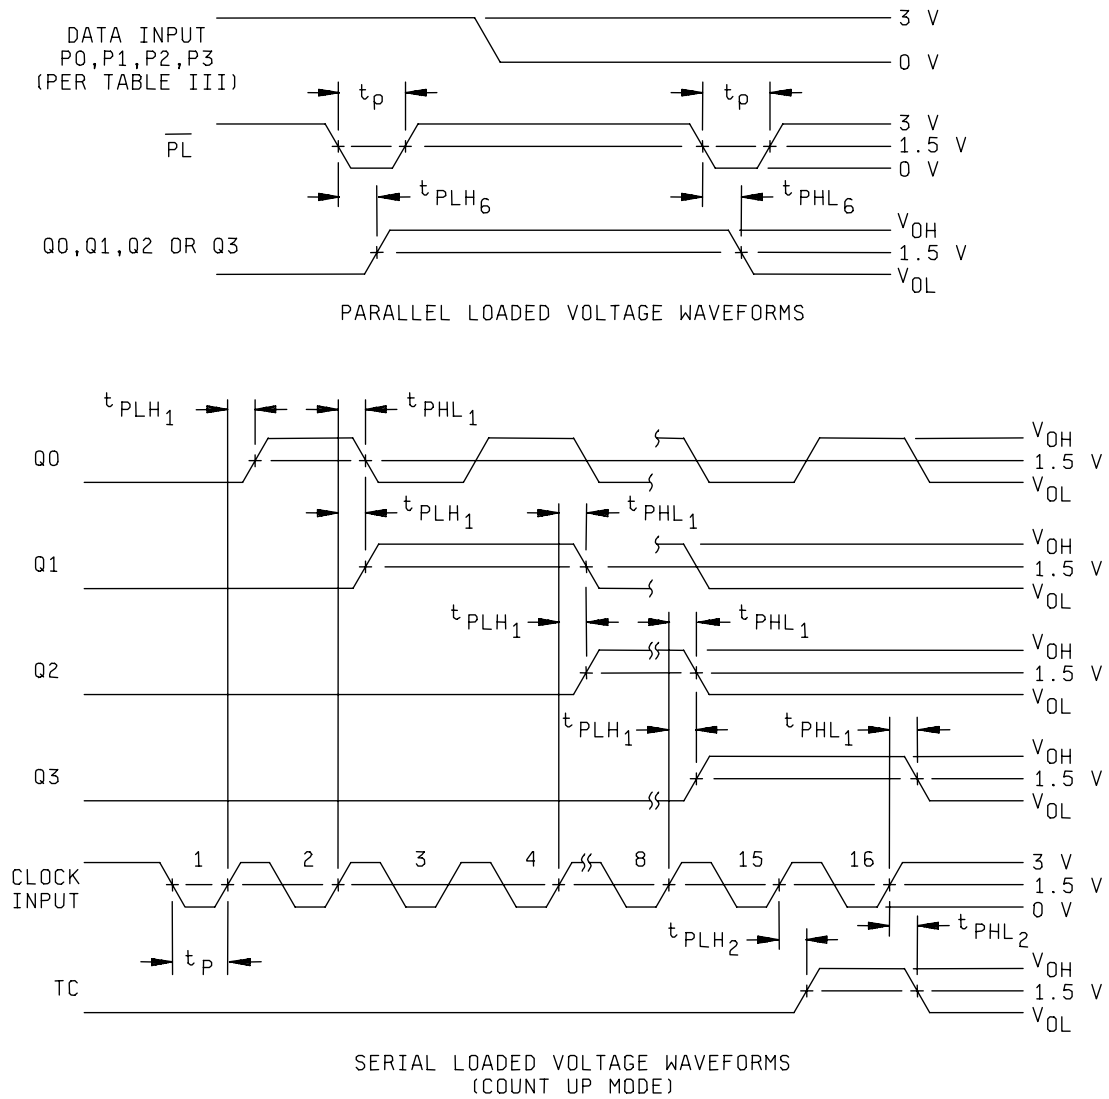FIGURE 4. Switching time test circuit and waveforms for device type 03 - Continued.

DEVICE TYPE 03



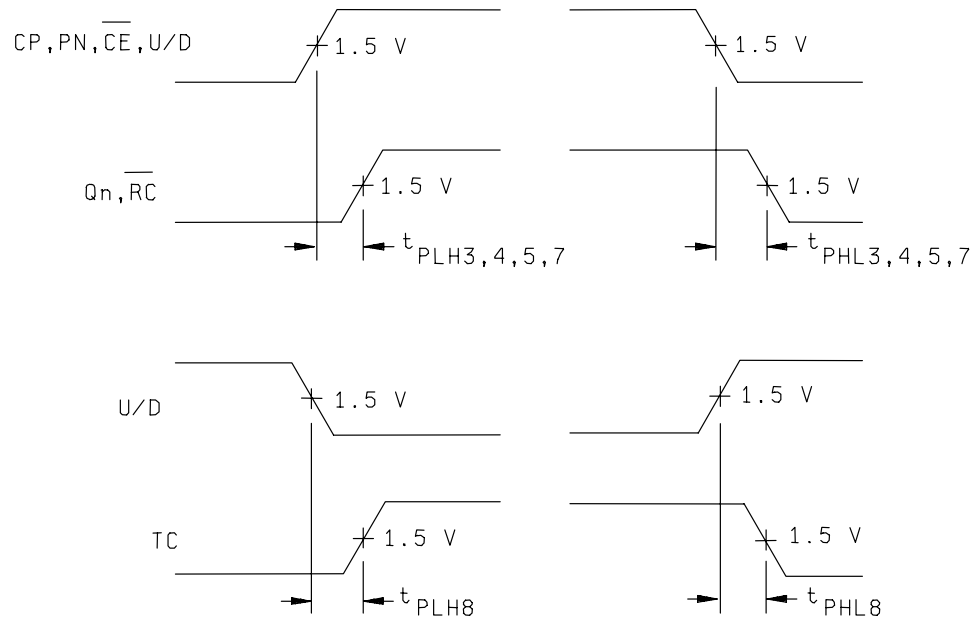


FIGURE 4. Switching time waveforms - Continued.

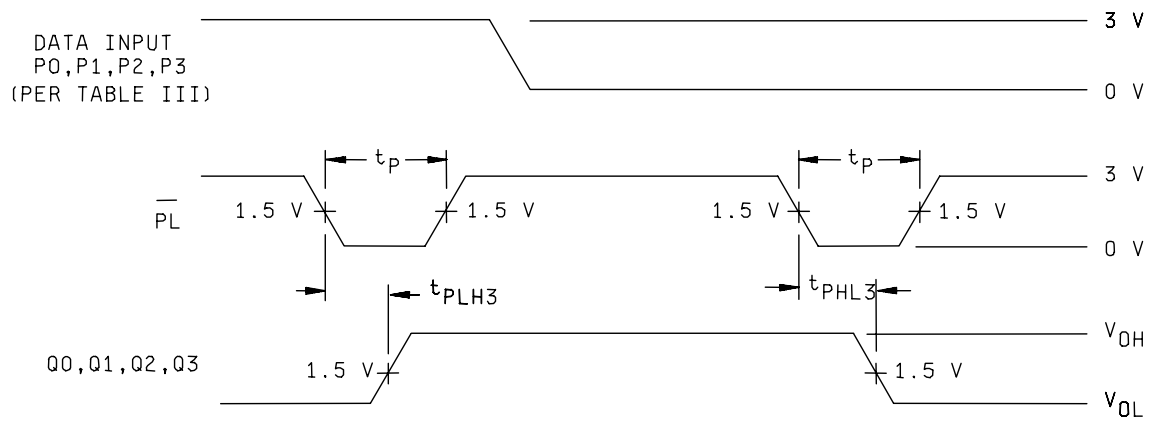


PARALLEL LOADED VOLTAGE WAVEFORMS

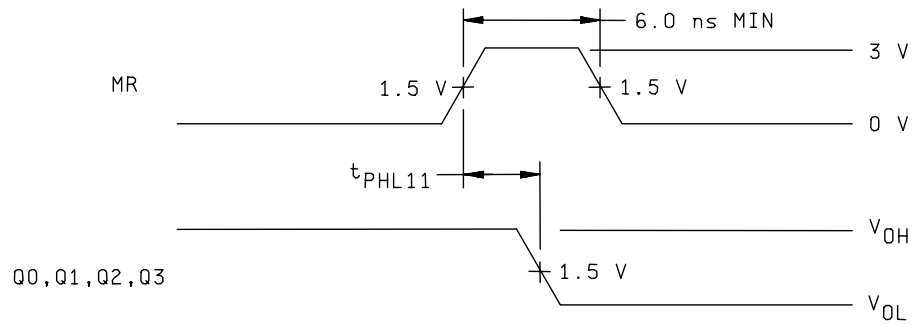

CLEAR SWITCHING VOLTAGE WAVEFORMS

FIGURE 4. Switching time test circuit and waveforms for device type 04 - Continued.

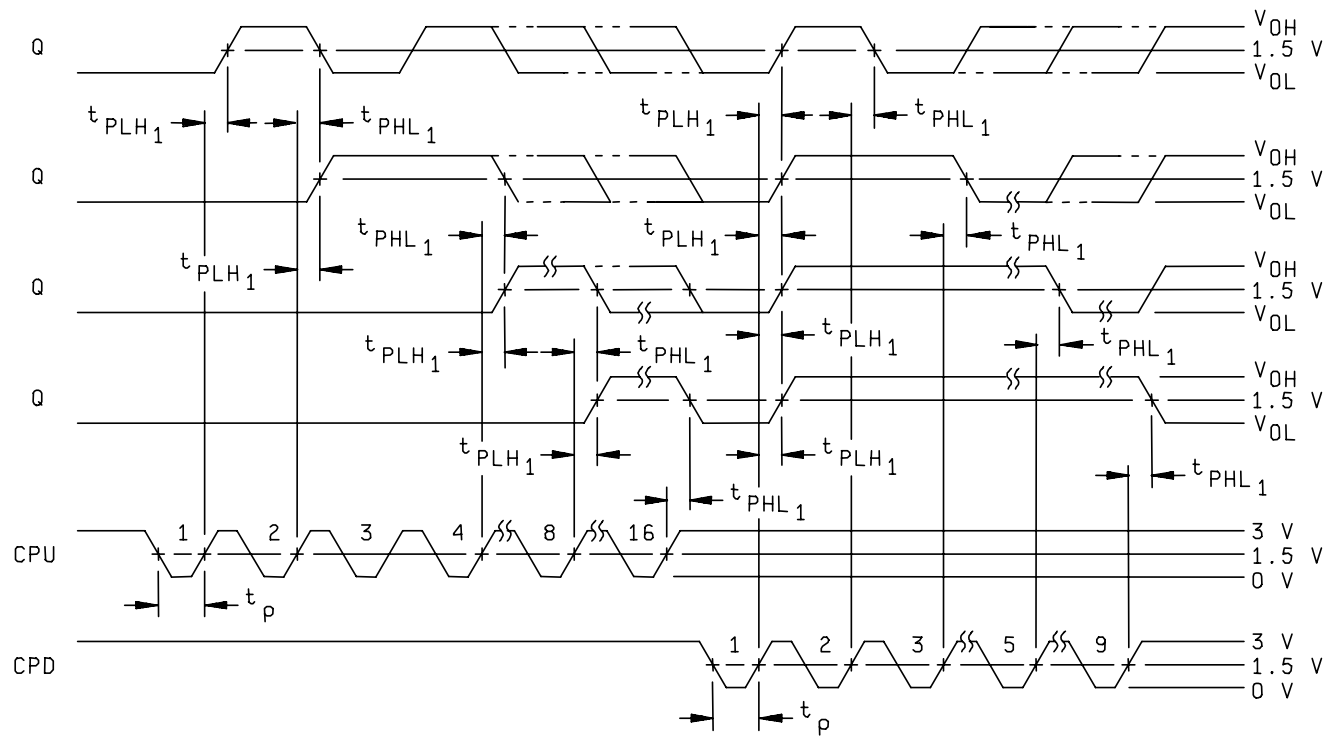

SERIAL LOADED VOLTAGE WAVEFORMS

FIGURE 4. Switching time test circuit and waveforms for device type 04 - Continued.

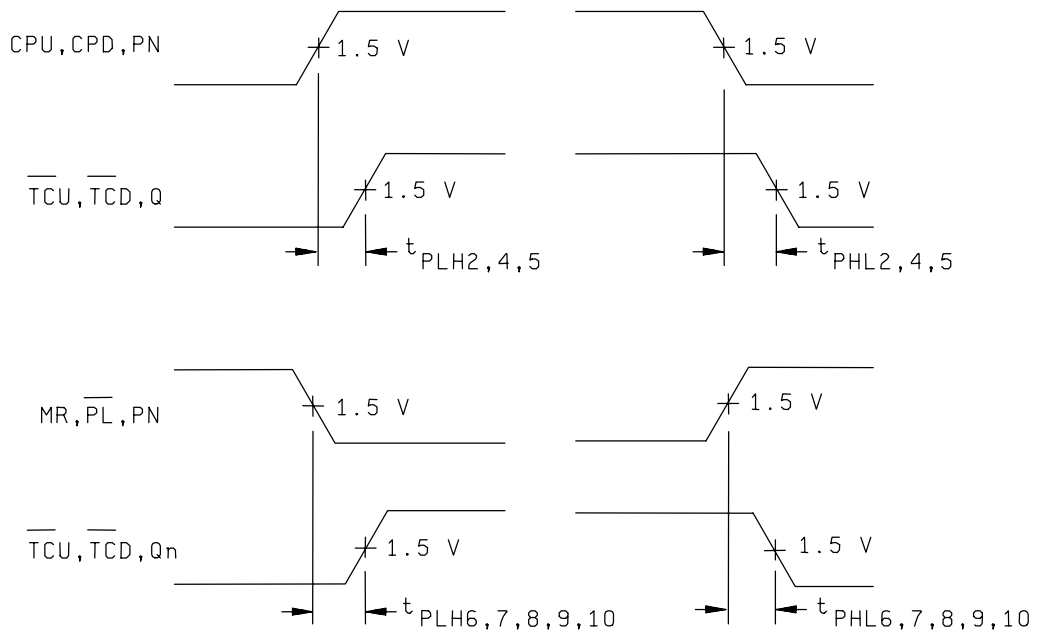
DEVICE TYPE 04FIGURE 4. Switching time waveforms - Continued.

TABLE III. Group A inspection for device type 01.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits		Unit					
				2	3	4	5	7	8	9	10	11	12	13	14	15	16	Min	Max									
1 Tc = 25°C	V _{OH}	3006 " " "	Cases 2, X, J/ Test no.	MR	CP	P0	P1	P2	P3	CEP	GND	PE	CET	Q3	Q2	Q1	Q0	TC	V _{CC}	Q3	Q2	Q1	Q0	TC	V			
				2I	2I			2.0V													4.5V	Q3	Q2	Q1	Q0	TC		
				"	"	"	2.0V															"	Q3	Q2	Q1	Q0	TC	"
				"	"	"	2.0V															"	Q3	Q2	Q1	Q0	TC	"
	OL	3007 " " "	5.5V	"	"	5.5V	5.5V	5.5V	5.5V	5.5V	"	"	0.0V	2.0V	20 mA					"	Q3	Q2	Q1	Q0	TC	"		
				"	"			0.8V													"	Q3	Q2	Q1	Q0	TC	"	
				"	"	0.8V	0.8V														"	Q3	Q2	Q1	Q0	TC	"	
				"	"	0.8V															"	Q3	Q2	Q1	Q0	TC	"	
	IC	3022 " " "	-18 mA	"	"	5.5V	5.5V	5.5V	5.5V	"	"	"	0.8V						20 mA	"	MR				-1.2	"		
				"	-18 mA																"	CP					"	
				"		-18 mA															"	P0					"	
IH1	IH1	3010 " " " " " " " "	2.7 V	2.7 V															5.5 V	MR				40	μA			
				2.7 V																"	CP				"	"		
					2.7 V	2.7 V														"	P0				"	"		
							2.7 V														"	P1				"	"	
																				"	P2				"	"		
								2.7 V													"	P3				"	"	
														0.0V	0.0V					"	CEP				"	"		
														2.7V	0.0V					"	PE				"	"		
														"	0.0V	2.7V				"	GET				"	"		
				7.0V										"						"	MR				100	"		
					7.0V									"						"	CP				"	"		
IH2	IH2	3009 " " " " " " "			7.0V														"	CP				"	"			
						7.0V														"	P0				"	"		
							7.0V													"	P1				"	"		
								7.0V												"	P2				"	"		
									7.0V											"	P3				"	"		
														0.0V	0.0V					"	CEP				"	"		
														7.0V	0.0V					"	PE				"	"		
														"	0.0V	7.0V				"	GET				"	"		
				0.5V										"						"	MR			3/		mA		
					0.5V									"						"	CP			"	"	"		
						0.5V								0.0V						"	P0				"	"		
IL2	IL2	3009 " " " " " " "					0.5V					"							"	P1				"	"			
													"						"	P2				"	"			
													"						"	P3				"	"			
													"						"	CEP				"	"			
													"						"	PE				"	"			
													"						"	GET				"	"			
													"						"	MR			3/		mA			
													"							"	CP			"	"	"		
													"							"	P0				"	"		
													"							"	P1				"	"		
													"							"	P2				"	"		

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits		Unit	
				2	CP	P0	P1	P2	P3	CEP	GND	PE	CET	Q3	Q2	Q1	Q0	TC	V _{CC}		Min	Max		
1 T _C = 25°C	I _{OS}	3011	47	2/				5.5 V							0.0 V				5.5 V	Q3	-60	-150	mA	
			48	"				5.5 V												Q2	"	"	"	
			49	"				5.5 V													Q1	"	"	"
			50	"				5.5 V								0.0 V	0.0 V				Q0	"	"	"
			51	"				5.5 V											0.0 V		TC	"	"	"
2	G _{CL}	3005	52	5.5 V	5.5 V	0.0 V	0.0 V	0.0 V				5.5 V						0.0 V		V _{CC}		55	"	
3	Same tests, terminal conditions, and limits as subgroup 1, except T _C = +125°C and V _{I,C} tests are omitted.																							
7 T _C = 25°C	Functional test J	3014	53	B	B	B	B	B	B	B	GND	A	B	L	L	L	L	L	L	All outputs				
54			A	B	B	B	B	B	A	"	"	A	"	"	"	"	"	"	"	"	"	"	"	
55			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
56			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
57			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
58			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
59			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
60			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
61			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
62			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
63			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
64			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
65			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
66			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
67			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
68			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
69			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
70			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
71			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
72			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
73			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
74			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
75			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
76			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
77			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
78			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
79			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
80			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
81			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
82			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
83			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
84			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
85			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
86			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
87			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
88			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
89			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
90			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
91			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
92			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
93			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
94			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
95			"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
96			"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	

See footnotes at end of table III.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F 2, X, J/ Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Limits		Unit					
				MR	CP	P0	P1	P2	P3	CEP	GND	PE	CET	Q3	Q2	Q1	Q0	TC	V _{CC}	Min	Max						
7 T _C = 25°C	Functional test J	3014	97	A	A	A	A	A	A	A	A	B	A	H	H	H	H	H	H	6/	All outputs						
			98	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		"					
			99	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		"					
			100	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		"					
			101	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		"					
			102	"	B	B	B	B	B	"	"	"	"	"	"	"	"	"	"	"		"					
			103	"	A	B	B	B	B	"	"	"	"	"	"	"	"	"	"	"		"					
			104	"	B	A	A	A	A	"	"	"	"	"	"	"	"	"	"	"		"					
			105	"	A	A	A	A	A	"	"	"	"	"	"	"	"	"	"	"		"					
			8	Repeat subgroup 7 tests, at T _C = 125°C and T _C = -55°C.																							
9 T _C = 25°C	T _{MAX} Z/ g/ Fig. 4	3003	106	2.7 V	IN					2.7 V	GND	2.7 V	2.7 V				OUT	OUT	5.0 V	Q0	Q1	Q2	Q3	90		MHz	
			107	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			108	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			109	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			110 g/	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			111 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			112 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			113 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			114 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			115 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
10	PH1	3014	116 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			117 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			118 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			119 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			120 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			121 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			122 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			123 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			124 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			125 "	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
11	PH2	3014	126	2.7 V	IN	2.7 V	2.7 V	2.7 V	2.7 V	"	"	2.7 V	2.7 V	"	"	"	"	OUT	"	"	4.5	14.0	"	"			
			127	"	IN	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			128	"	0.0 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			129	"	2.7 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
			130	IN	0.0 V	"	"	"	"	"	"	"	"	0.0 V	2.7 V	"	"	"	OUT	"	"	"	5.5	12.0	"	"	
			131	"	"	2.7 V			"	"	"	"	"	"	"	"	"	"	OUT	"	"	"	"	"	"	"	
			132	"	"			2.7 V		"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			133	"	"			2.7 V		"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			134	"	"	2.7 V	2.7 V	2.7 V	2.7 V	"	"	"	"	"	"	"	"	"	"	OUT	"	"	"	4.5	11.5	"	"
			10	Same tests and terminal conditions as for subgroup 9, except T _C = +125°C and use limits from table I.																							
11	Same tests, terminal conditions and limits as for subgroup 10, except T _C = -55°C.																										

See footnotes at end of table III.

TABLE III. Group A inspection for device type 02.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits		Unit	
				2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Min		Max			
1 Tc = 25°C	V _{OH}	3006	1	2.0 V	2/	2.0 V	2.0 V			0.8 V	GND	PE	CET				-1.0 mA		4.5 V	Q3	2.5		V	
		"	2	5.5 V	"		2.0 V				"	"	"				-1.0 mA		"	Q2	"		"	
		"	3	"	"						"	"	"				-1.0 mA		"	Q1	"		"	
		"	4	"	"			2.0 V			"	"	"						"	Q0	"		"	
		"	5	"	"	5.5 V	5.5 V	5.5 V			"	"	0.0 V	2.0 V				-1.0 mA	"	"	TC	"		"
	OL	3007	6	"	"	0.8 V						"	"					20 mA		"	Q3	0.5		"
		"	7	"	"							"	"							"	Q2	"		"
		"	8	"	"			0.8 V				"	"							"	Q1	"		"
		"	9	"	"				0.8 V			"	"							"	Q0	"		"
		"	10	"	"	5.5 V	5.5 V	5.5 V	5.5 V			"	"	0.8 V					20 mA	"	TC	"		"
IH1	3022	11	-18 mA								"								"	SR	-1.2		"	
	"	12									"								"	CP	"		"	
	"	13			-18 mA						"								"	P0	"		"	
	"	14					-18 mA				"								"	P1	"		"	
	"	15									"								"	P2	"		"	
	"	16							-18 mA		"								"	P3	"		"	
	"	17								-18 mA	"								"	CEP	"		"	
	"	18									"		-18 mA						"	PE	"		"	
	"	19									"								"	CET	"		"	
	3010	20	2.7 V								"			-18 mA				5.5 V	SR	40		μA		
IH2	"	21									"							"	CP	20		"		
	"	22									"							"	P0	"		"		
	"	23			2.7 V						"							"	P1	"		"		
	"	24				2.7 V					"							"	P2	"		"		
	"	25							2.7 V		"							"	P3	"		"		
	"	26								2.7 V	"		0.0 V					"	CEP	"		"		
	"	27								0.0 V	"		2.7 V	0.0 V				"	PE	40		"		
	"	28		2/						0.0 V	"		0.0 V	2.7 V				"	CET	40		"		
	"	29	7.0 V								"							"	SR	100		"		
	"	30		7.0 V							"							"	CP	"		"		
IL1	"	31			7.0 V						"							"	P0	"		"		
	"	32				7.0 V					"							"	P1	"		"		
	"	33					7.0 V				"							"	P2	"		"		
	"	34							7.0 V		"							"	P3	"		"		
	"	35								7.0 V	"		0.0 V					"	CEP	"		"		
	"	36								0.0 V	"		7.0 V	0.0 V				"	PE	"		"		
	"	37								0.0 V	"		0.0 V					"	CET	"		"		
	3009	38	0.5 V								"							"	CP	3/	3/	mA		
	"	39			0.5 V						"		0.0 V					"	P0	"		"		
	"	40				0.5 V					"							"	P1	"		"		
IL2	"	41						0.5 V			"							"	P2	"		"		
	"	42							0.5 V		"							"	P3	"		"		
	"	43								0.5 V	"		5.5 V					"	CEP	"		"		
	"	44	0.5 V							5.5 V	"		5.5 V					"	SR	"		"		
	"	45								5.5 V	"		5.5 V					"	PE	"		"		
IL2	"	46 4/	5.5 V	2/	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	"	2/	0.5 V					"	CET	"		"		
	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	

See footnotes at end of table III.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F Cases 2, X, J/ Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Limits		Measured terminal	Unit	
				SR	CP	P0	P1	P2	P3	CEP	GND	PE	CET	Q3	Q2	Q1	Q0	TC	V _{CC}	Min	Max			
1 T _C = 25°C	I _{OS}	3011	47	5.5V	2/	5.5V	5.5V				GND	0.0V				0.0V	0.0V		5.5V	Q3	-60	-150	mA	
			48	"	"	"	"	5.5V				"				0.0V			"	Q2	"	"	"	
			49	"	"	"	"	"				"							"	Q1	"	"	"	
			50	"	"	"	"	"				"							"	Q0	"	"	"	
			51	"	"	"	5.5V	5.5V	5.5V	5.5V		"	5.5V	0.0V	5.5V				0.0V	"	TC	"	"	"
2		CC	52	5.5V	5.5V	0.0V	0.0V	0.0V	5.5V		5.5V	5.5V							V _{CC}		55	"		
3	Same tests, terminal conditions, and limits as subgroup 1, except T _C = +125°C and V _{IC} tests are omitted.																							
7 T _C = 25°C	Functional test J/	3014	53	B	B	B	B	B	B	B	GND	A	B	L	L	L	L	L	L	6/	All outputs			
			54	A	B	"	"	"	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			55	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			56	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			57	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			58	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			59	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			60	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			61	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			62	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			63	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			64	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			65	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			66	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			67	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			68	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			69	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			70	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			71	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			72	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			73	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			74	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			75	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			76	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			77	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			78	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			79	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			80	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			81	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			82	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			83	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			84	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			85	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			86	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			87	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			88	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			89	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			90	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			91	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			92	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			93	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			94	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			95	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
			96	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"

See footnotes at end of table III.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F 2, X, 1/ Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Limits		Unit
				SR	CP	P0	P1	P2	P3	CEP	GND	PE	A	H	Q1	Q2	Q3	Q0	TC	Min	Max	
7 T _C = 25°C	Func- tional test J	3014	97	A	A	A	A	A	A	A	GND	B	A	H	H	L	L	L	L	TC	V _{CC}	
			98	A	B	"	"	"	"	"	A	"	"	"	"	"	"	"	"	H	g/	
			99	B	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			100	B	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			101	A	B	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			102	"	A	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
			103	"	B	B	B	B	B	B	"	"	"	"	"	"	"	"	"	"	"	
			104	"	A	B	B	B	B	B	"	"	"	"	"	"	"	"	"	"	"	
			105	"	B	A	A	A	A	A	"	"	"	"	"	"	"	"	"	"	"	
			106	"	A	A	A	A	A	A	"	"	"	"	"	"	"	"	"	"	"	
8 9 T _C = 25°C	Repeat subgroup 7 tests, at T _C = 125°C and T _C = -55°C. 3003 Fig. 4 I/ g/ PLH1 PHL1 PLH2 PHL2 PHL3 PHL4 PHL4	3003 Fig. 4 I/ g/ PLH1 PHL1 PLH2 PHL2 PHL3 PHL4 PHL4	107	2.7 V	IN	"	"	"	"	2.7 V	GND	2.7 V	"	2.7 V	"	OUT	OUT	OUT	50 V	Q0	90	MHz
			108	"	"	"	"	"	"	"	"	"	"	"	OUT	"	"	"	"	Q1	"	"
			109	"	"	"	"	"	"	"	"	"	"	OUT	"	"	"	"	"	Q2	"	"
			110	"	"	"	"	"	"	"	"	"	"	OUT	"	"	"	"	"	Q3	"	"
			111	g/	2/	"	"	"	"	"	"	"	"	"	"	OUT	"	"	"	CP to Q0	2.0	7.5
			112	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q1	"	"
			113	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q2	"	"
			114	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q3	"	"
			115	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q0	3.5	10.0
			116	"	"	"	"	"	"	"	"	"	"	"	"	OUT	"	"	"	CP to Q1	"	"
			117	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q2	"	"
			118	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q3	"	"
			119	2.7 V	"	"	"	"	"	"	"	0.0 V	0.0 V	"	"	OUT	"	"	"	CP to Q0	2.5	8.5
10 11	Same tests and terminal conditions as for subgroup 9, except T _C = +125°C and use limits from table I. Same tests, terminal conditions and limits as for subgroup 10, except T _C = -55°C.	3003 Fig. 4 I/ g/ PLH1 PHL1 PLH2 PHL2 PHL3 PHL4 PHL4	120	"	"	"	"	"	"	"	"	"	"	"	"	OUT	"	"	"	CP to Q1	"	"
			121	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q2	"	"
			122	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q3	"	"
			123	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q0	4.0	"
			124	"	"	"	"	"	"	"	"	"	"	"	"	OUT	"	"	"	CP to Q1	"	"
			125	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q2	"	"
			126	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	CP to Q3	"	"
			127	2.7 V	IN	2/	2.7 V	2.7 V	2.7 V	"	"	2/	2.7 V	"	"	"	"	OUT	"	CP to TC	4.5	14.0
			128	"	IN	2.7 V	"	"	"	"	"	2.7 V	2.7 V	"	"	"	"	"	"	CP to TC	5.0	16.0
			129	"	0.0 V	"	"	"	"	"	"	0.0 V	0.0 V	IN	"	"	"	"	"	CET to TC	2.5	7.5
			130	"	0.0 V	"	"	"	"	"	"	0.0 V	0.0 V	IN	"	"	"	"	"	CET to TC	2.5	7.5

See footnotes at end of table III.

TABLE III. Group A inspection for device type 03.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F, 2, X, 1/	Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Limits		Measured terminal	Unit
																					Min	Max		
1 T _C = 25°C	V _{OH}	3006	Cases 1	1	P1	Q1	Q0	CE	U/D	Q2	Q3	GND	P3	P2	PL	TC	RC	CP	P0	V _{CC}	2.5		Q1	V
		"	Cases 2	2	2.0 V	-1.0 mA	-1.0 mA	2.0 V				GND			0.8 V				2.0 V	4.5 V	"		Q0	"
		"	"	3				"		-1.0 mA		"	2.0 V	2.0 V	"					"	"		Q2	"
		"	"	4	2.0 V			0.8 V	0.8 V		-1.0 mA	"	"	2.0 V	"	-1.0 mA	2.0 V	2.0 V		"	"		Q3	"
		"	"	5	2.0 V			0.8 V	0.8 V			"	"	2.0 V	"					"	"		TC	"
		"	"	6	2.0 V			0.8 V	0.8 V			"	"	2.0 V	"		-1.0 mA	2.0 V	2.0 V	"	"		RC	"
	OL	3007	Cases 7	7	0.8 V	20 mA	20 mA	2.0 V				"			"				0.8 V	"	0.5		Q1	"
		"	"	8			20 mA	"				"		0.8 V	"					"	"		Q0	"
		"	"	9				"		20 mA		"	0.8 V	"	"					"	"		Q2	"
		"	"	10	2.0 V			"	2.0 V		20 mA	"	0.8 V	2.0 V	"					"	"		Q3	"
		"	"	11	2.0 V			"	2.0 V			"	2.0 V	2.0 V	"	20 mA		0.8 V	2.0 V	"	"		TC	"
		"	"	12	2.0 V			0.8 V	0.8 V			"	2.0 V	2.0 V	"		20 mA	0.8 V	2.0 V	"	"		RC	"
2	I _C	3022	Cases 13	13	-18 mA			-18 mA				"								"	-1.2		P1	"
		"	"	14								"								"	"		CE	"
		"	"	15								"								"	"		U/D	"
		"	"	16								"	-18 mA							"	"		P3	"
		"	"	17								"								"	"		P2	"
		"	"	18								"			-18 mA					"	"		PL	"
	I _{H1}	"	"	19								"						-18 mA		"	"		CP	"
		"	"	20								"							-18 mA	"	"		P0	"
		3010	Cases 21	21	2.7 V							"			5.5 V				-18 mA	5.5 V	20		P1	μA
		"	"	22				2.7 V				"								"	"		CE	"
		"	"	23					2.7 V			"								"	"		U/D	"
		"	"	24								"	2.7 V		5.5 V					"	"		P3	"
3	I _{H2}	"	"	25								"		2.7 V	5.5 V					"	"		P2	"
		"	"	26								"			2.7 V					"	"		PL	"
		"	"	27								"						2.7 V		"	"		CP	"
		"	"	28								"			5.5 V				2.7 V	"	"		P0	"
		"	"	29	7.0 V							"			5.5 V					"	100		P1	"
		"	"	30				7.0 V				"								"	"		CE	"
	I _{L1}	"	"	31					7.0 V			"								"	"		U/D	"
		"	"	32								"	7.0 V		5.5 V					"	"		P3	"
		"	"	33								"		7.0 V	5.5 V					"	"		P2	"
		"	"	34								"			7.0 V					"	"		PL	"
		"	"	35								"						7.0 V		"	"		CP	"
		"	"	36								"			5.5 V				7.0 V	"	"		P0	"
4	I _{L2}	3009	Cases 37	37	0.5 V				0.5 V			"			0.0 V					"	3/		U/D	mA
		"	"	38								"								"	"		P3	"
		"	"	39								"	0.5 V		0.0 V					"	"		P2	"
		"	"	40								"		0.5 V	0.5 V					"	"		PL	"
		"	"	41								"						0.5 V		"	"		CP	"
		"	"	42								"							0.5 V	"	"		P0	"
		"	"	43								"			0.0 V				0.5 V	"	"		CE	"
		"	"	44				0.5 V				"								"	"		P0	"

See footnotes at end of table III.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F, 2, X, 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits	Unit
			Test no.	P1	Q1	Q0	CE	U/D	Q2	Q3	GND	P3	P2	PL	TC	RC	CP	P0	V _{CC}		Min	Max
1	T _C = 25°C	I _{OS}	45	5.5 V	0.0 V	0.0 V	5.5 V							0.0 V					5.5 V	Q1	-60	-150
			46																	Q0		
			47						0.0 V	0.0 V		5.5 V								Q2		
			48				0.0 V	0.0 V				5.5 V			0.0 V		5.5 V	5.5 V		Q3		
			49	5.5 V			0.0 V	0.0 V					5.5 V				5.5 V	5.5 V		TC		
2	T _C = 25°C	I _{OS}	50	5.5 V			0.0 V	0.0 V					5.5 V				5.5 V	5.5 V		RC		
			51	0.0 V			0.0 V	0.0 V				0.0 V	0.0 V	0.0 V			0.0 V	0.0 V		V _{CC}		55
			52																			
			53																			
			54																			
3	T _C = 25°C	Functional test	55																			
			56																			
			57																			
			58																			
			59																			
4	T _C = 25°C	Functional test	60																			
			61																			
			62																			
			63																			
			64																			
5	T _C = 25°C	Functional test	65																			
			66																			
			67																			
			68																			
			69																			
6	T _C = 25°C	Functional test	70																			
			71																			
			72																			
			73																			
			74																			
7	T _C = 25°C	Functional test	75																			
			76																			
			77																			
			78																			
			79																			
8	T _C = 25°C	Functional test	80																			
			81																			
			82																			
			83																			
			84																			
9	T _C = 25°C	Functional test	85																			
			86																			
			87																			
			88																			
			89																			
10	T _C = 25°C	Functional test	90																			
			91																			
			92																			
			93																			
			94																			
11	T _C = 25°C	Functional test	95																			
			96																			
			97																			
			98																			
			99																			

8 Repeat subgroup 7 at T_C = 125°C and T_C = -55°C.

See footnotes at end of table III.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F 2, X 1/2 Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal		Limits		Unit	
				P1	Q1	Q0	CE	GND	U/D	Q2	Q3	GND	P3	P2	PL	TC	RC	CP	P0	V _{CC}	Q0	Q1	Q2		Q3
9 T _C = 25°C	f _{max} Z	3003 Fig. 4	99			OUT	GND	GND						2.7 V			IN		5.0 V	Q0	90		MHz		
			100		OUT						GND										Q1				
			101																			Q2			
			102						OUT													Q3			
	PH1		103			OUT								2/							CP to Q0	3.0	7.5	ns	
			104		OUT																CP to Q1				
			105						OUT												CP to Q2				
			106			OUT															CP to Q3				
	PH1		107																		CP to Q0	5.0	11.0		
			108		OUT																CP to Q1				
			109						OUT												CP to Q2				
			110																		CP to Q3				
	PH2		111	2.7 V							2.7 V	2.7 V			OUT			2.7 V			CP to TC	6.0	13.0		
			112												OUT			2.7 V			CP to TC	5.0	11.0		
			113													OUT		2.7 V			CP to RC	3.0	7.5		
			114														OUT				CP to RC		7.0		
	PH4		115			OUT	2.7 V	2.7 V										2.7 V	IN		P0 to Q0		7.0		
			116	IN	OUT														2.7 V		P1 to Q1				
			117	2.7 V						OUT				IN							P2 to Q2				
			118										IN	2.7 V							P3 to Q3				
	PH4		119			OUT							2.7 V						IN		P0 to Q0	6.0	13.0		
			120	IN	OUT														2.7 V		P1 to Q1				
			121	2.7 V						OUT				IN							P2 to Q2				
			122										IN	2.7 V							P3 to Q3				
PH5		123										2.7 V								CE to RC	3.0	7.0			
		124				IN														CE to RC		7.0			
		125			OUT	2.7 V	2.7 V							IN			2.7 V	2/		PL to Q0	5.0	11.0			
		126	2/	OUT														2.7 V		PL to Q1					
PH4		127	2.7 V						OUT				2/							PL to Q2					
		128										2/	2.7 V							PL to Q3					
		129			OUT							2.7 V						0.0 V		PL to Q0	5.5	12.0			
		130	0.0 V	OUT														2.7 V		PL to Q1					
PH7		131	2.7 V						OUT				0.0 V							PL to Q2					
		132	2.7 V									0.0 V	2.7 V							PL to Q3					
		133					IN							2/		OUT				U/D to RC	7.0	18.0			
		134														OUT				U/D to RC	5.5	12.0			
PH8		135													OUT					U/D to TC	4.0	10.0			
		136													OUT					U/D to TC	4.0	10.0			
		Same tests and terminal conditions as for subgroup 9, except T _C = +125°C and use limits from table I.																							
		Same tests, terminal conditions and limits as for subgroup 10, except T _C = -55°C.																							

See footnotes at end of table III.

TABLE III. Group A inspection for device type 04.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F, 2, X, 1/	Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Limits		Measured terminal	Unit
																					Min	Max		
1 T _C = 25°C	V _{OH}	3006	Cases 1	2.0 V	P1	Q1	Q0	CPD	CPU	Q2	Q3	GND	P3	P2	PL	TQJ	TQD	MR	P0	V _{CC}	2.5		Q1	V
		"	2				-1.0 mA								0.8 V				2.0 V	4.5 V			Q0	"
		"	3							-1.0 mA				2.0 V									Q2	"
		"	4								-1.0 mA												Q3	"
		"	5	5.5 V				5.5 V	2.0 V				5.5 V			-1.0 mA			5.5 V				TQJ	"
		"	6	0.0 V				2.0 V	5.5 V				0.0 V				-1.0 mA		0.0 V				TQD	"
	OL	3007	7	0.8 V		20 mA											0.0 V						Q1	0.5
		"	8				20 mA							0.8 V					0.8 V				Q0	"
		"	9																				Q2	"
		"	10					5.5 V	0.8 V		20 mA		0.8 V										Q3	"
		"	11	5.5 V									5.5 V			20 mA		0.8 V	5.5 V				TQJ	"
		"	12	0.0 V				0.8 V	5.5 V				0.0 V				20 mA	0.0 V	0.0 V				TQD	"
	IC	3022	13	-18 mA				-18 mA															P1	-1.2
		"	14																				CPD	"
		"	15						-18 mA														CPD	"
		"	16										-18 mA										P3	"
		"	17																				P2	"
		"	18												-18 mA								PL	"
	IH1	"	19															-18 mA					MR	"
		"	20																-18 mA				P0	"
		3010	21	2.7 V																5.5 V	20		P1	μA
		"	22					2.7 V															CPD	"
		"	23						2.7 V														CPD	"
		"	24										2.7 V										P3	"
	IH2	"	25											2.7 V									P2	"
		"	26												2.7 V								PL	"
		"	27															2.7 V					MR	"
		"	28																2.7 V				P0	"
		"	29	7.0 V																			P1	100
		"	30					7.0 V															CPD	"
	IL1	3009	31	0.5 V															7.0 V				MR	"
		"	32						7.0 V										0.0 V				P0	"
		"	33										0.5 V										P1	3/
		"	34											0.5 V									P3	"
		"	35																				P2	"
		"	36																				PL	"
	IL2	"	37																				MR	"
		"	38																				P0	"
		"	39																				P3	"
		"	40																				P2	"
		"	41												0.5 V								PL	"
		"	42																0.5 V				MR	"
		"	43					0.5 V	5.5 V										0.0 V				P0	"
		"	44					5.5 V	0.5 V														CPD	"

See footnotes at end of table III.

TABLE III. Group A inspection for device type 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Limits		Unit
				2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20	Min	Max	
1	I_{OS}	3011	Cases 2, X, I_{f}	P1	Q1	Q0	CPD	CPU	Q2	Q3	GND	P3	P2	P1	TQJ	TQJ	MR	P0	V _{CC}			
			Test no.																			
			45	5.5 V	0.0 V	0.0 V								0.0 V			0.0 V	5.5 V	5.5 V	-60	-150	mA
			46						0.0 V				5.5 V									
			47							0.0 V		5.5 V										
2	I_{CC}	3005	51	5.5 V			5.5 V	5.5 V				5.5 V	5.5 V				0.0 V	0.0 V	0.0 V			
			52																			
			53																			
			54																			
			55																			
3	Functional test	3014	56																			
			57																			
			58																			
			59																			
			60																			
5			61																			
			62																			
			63																			
			64																			
			65																			
			66																			
			67																			
			68																			
			69																			
			70																			
			71																			
			72																			
			73																			
			74																			
			75																			
			76																			
			77																			
			78																			
			79																			
			80																			
			81																			
			82																			
			83																			
			84																			
			85																			
			86																			
			87																			
			88																			
			89																			
			90																			
			91																			
			92																			

See footnotes at end of table III.

TABLE III. Group A inspection for device type 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F Cases 2, X, J/ Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Limits		Unit		
				P1	Q1	Q0	CPD	CPU	Q2	Q3	GND	P3	P2	PL	TQJ	TQD	MR	P0	V _{CC}	Measured terminal	Min		Max	
7 T _C = 25°C	Func-tional J	3014	93	A	H	L	A	A	H	H		A	A	A	H	H	B	A	6/	All outputs				
			94	"	H	L	B	"	"	"	GND	"	"	"	"	"	"	"	"				"	"
			95	"	L	H	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			96	"	"	H	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			97	"	"	L	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			98	"	"	L	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			99	"	H	H	A	"	L	"	"	"	"	"	"	"	"	"	"				"	"
			100	"	"	H	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			101	"	"	L	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			102	"	"	L	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			103	"	L	H	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			104	"	"	H	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			105	"	"	L	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			106	B	"	L	B	"	"	"	"	B	B	"	"	"	"	"	"				"	"
			107	"	H	H	A	"	H	L	"	"	"	"	"	"	"	"	"				"	"
			108	"	"	H	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			109	"	"	L	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			110	"	"	L	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			111	"	L	H	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			112	"	"	H	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			113	"	"	L	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			114	B	"	L	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			115	"	H	H	A	"	L	"	"	"	"	"	"	"	"	"	"				"	"
			116	"	"	H	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			117	"	"	L	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			118	"	"	L	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			119	"	L	H	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			120	"	"	H	B	"	"	"	"	"	"	"	"	"	"	"	"				"	"
			121	"	"	L	A	"	"	"	"	"	"	"	"	"	"	"	"				"	"
8 Repeat subgroup 7 at T _C = 125°C and T _C = -55°C.	f _{max} Z/ 9/	3003 Fig. 4	122		OUT		2.7 V	IN			GND			2.7 V			GND		5.0 V	90		MHz		
			123		OUT		"	"	OUT		"			"			"		"	"	"			
			124				"	"	OUT	"			"		"		"		"	"	"			
			125			OUT	IN	2.7 V			"			"		"		"		"	"			
			126			OUT		"	"		"			"		"		"		"	"			
			127		OUT		"	"	OUT		"			"		"		"		"	"			
			128				"	"		OUT	"			"		"		"		"	"			
			129			"	"	"		OUT	"			"		"		"		"	"			
			130	0.0 V		OUT		IN		OUT	"	0.0 V	0.0 V	2/			0.0 V	0.0 V	"	3.5	8.5	ns		
			131	0.0 V	OUT		"	"	OUT		"	"	"	"			"	"	"	"	"			
			132	"			"	"		OUT	"	"	"	"			"	"	"	"	"			
			133	"			"	"		OUT	"	"	"	"			"	"	"	"	"			
			134	"		IN					"	0.0 V	0.0 V	"			"	0.0 V	"	"	"			
			135	0.0 V	OUT		"	"			"	"	"	"			"	"	"	"	"			
			136	"			"	"	OUT		"	0.0 V	0.0 V	"			"	"	"	"	"			
			137	"		"	"			OUT	"	0.0 V	"	"			"	"	"	"	"			
			138	0.0 V		OUT	2.7 V	IN			"	"	"	"			"	"	"	"	12.5			
			139	0.0 V	OUT		"	"	OUT		"	"	"	"			"	"	"	"	"			
			140	"			"	"		OUT	"	"	"	"			"	"	"	"	"			
			141	"			"	"		OUT	"	"	"	"			"	"	"	"	"			
			142	0.0 V		OUT	IN	2.7 V			"	0.0 V	0.0 V	"			"	"	"	"	"			
			143	"	OUT		"	"			"	"	"	"			"	0.0 V	"	"	"			
			144	0.0 V			"	"	OUT		"	"	"	"			"	"	"	"	"			
			145	0.0 V			"	"	OUT		"	"	0.0 V	"			"	"	"	"	"			

See footnotes at end of table III.

TABLE III. Group A inspection for device type 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F 2, X, 1/ Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Limits		Unit
				P1	Q1	Q0	CPD	CPU	Q2	Q3	GND	P3	P2	PL	T _{CU}	T _{CD}	MR	P0	V _{CC}	Min	Max	
9	t _{PLH2}	3003	146					IN						2/	OUT		0.0 V	0.0 V	5.0 V	4.0	9.0	ns
	t _{PHL2}	Fig. 4	147				2.7 V	IN						"	OUT		0.0 V	0.0 V	"	3.5	8.0	"
	PH3	"	148	0.0 V		OUT	0.0 V	0.0 V				0.0 V	0.0 V	IN				2.7 V	"	5.0	11.0	"
		"	149	2.7 V	OUT		"	"				"	0.0 V	"				0.0 V	"	"	"	"
		"	150	0.0 V			"	"	OUT			"	2.7 V	"				"	"	"	"	"
		"	151	"			"	"		OUT		2.7 V	0.0 V	"				"	"	"	"	"
	PH3	"	152	"		OUT	"	"				0.0 V	"	"			0.0 V	0.0 V	"	5.5	13.0	"
		"	153	"	OUT		"	"				"	"	"			"	"	"	"	"	"
		"	154	"			"	"	OUT			"	"	"			"	"	"	"	"	"
		"	155	"			"	"		OUT		"	"	"			"	"	"	"	"	"
	PLH4	"	156	"			IN	"				"	"	2/		OUT	"	"	"	2.5	9.0	"
	PH4	"	157	"			IN	"				"	"	2/		OUT	"	"	"	3.0	8.0	"
	PLH5	"	158			OUT	0.0 V	0.0 V				"		0.0 V			"	IN	"	2.0	7.0	"
		"	159	IN	OUT		"	"				"		"			"	"	"	"	"	"
		"	160				"	"	OUT			"	IN	"			"	"	"	"	"	"
		"	161				"	"		OUT		IN	"	"			"	"	"	"	"	"
	PH5	"	162			OUT	"	"				"		"			"	IN	"	6.0	14.5	"
		"	163	IN	OUT		"	"				"		"			"	"	"	"	"	"
		"	164				"	"	OUT			"	IN	"			"	"	"	"	"	"
		"	165				"	"		OUT		IN	"	"			"	"	"	"	"	"
	PLH6	"	166				"	"				"		2/	OUT		IN	"	"	5.0	13.5	"
	PH6	"	167				0.0 V	2.7 V				"		2/		OUT	IN	"	"	5.0	14.5	"
	PLH7	"	168					0.0 V				"		IN	OUT		0.0 V	0.0 V	"	6.0	15.5	"
	PLH8	"	169				0.0 V					"		"		OUT			"	"	15.5	"
	PH7	"	170				2.7 V	0.0 V				"		"	OUT			"	"	"	14.5	"
	PH8	"	171	0.0 V			0.0 V	2.7 V				0.0 V	0.0 V	"		OUT	0.0 V	0.0 V	"	"	14.5	"
	PLH9	"	172					0.0 V				"		0.0 V	OUT		"	IN	"	5.5	14.5	"
		"	173	IN				"				"		"	"		"	"	"	"	"	"
		"	174					"				"	IN	"	"		"	"	"	"	"	"
		"	175					"				IN	"	"	"		"	"	"	"	"	"
	PH9	"	176					"				"		"	"		"	IN	"	4.5	14.0	"
		"	177	IN				"				"		"	"		"	"	"	"	"	"
		"	178					"				"	IN	"	"		"	"	"	"	"	"
		"	179					"				IN	"	"	"		"	"	"	"	"	"

See footnotes at end of table III.

TABLE III. Group A inspection for device type 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E, F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Limits		Unit	
				2	3	4	5	7	8	9	10	12	17	18	19	20	Min	Max						
				P1	Q1	Q0	CPD	CPU	Q2	Q3	GND	P3	P2	PL	T _{CU}	T _{CD}			MR		P0	V _{CC}		
9	t _{PLH10}	3003	180	0.0 V			0.0 V	2.7 V			GND	0.0 V	0.0 V	0.0 V	OUT	OUT	0.0 V	IN	5.0 V	P0 to T _{CD}	5.5	14.5	ns	
			181	IN			"			"	0.0 V	"		"	"	"	"	0.0 V	"	"	P1 to T _{CD}	"	"	"
			182	0.0 V			"			"	"	IN	"	"	"	"	"	"	"	"	P2 to T _{CD}	"	"	"
			183	"			"			"	"	IN	0.0 V	"	"	"	"	"	"	"	P3 to T _{CD}	"	"	"
			184	"			"			"		"	0.0 V	"	"	"	"	"	IN	"	P0 to T _{CD}	4.5	14.0	"
	t	185	IN			"		"			"	"	"	"	"	"	0.0 V	"	"	P1 to T _{CD}	"	"	"	
		186	0.0 V			"		"			"	"	IN	"	"	"	"	"	"	P2 to T _{CD}	"	"	"	
		187	"			"		"			"	IN	0.0 V	"	"	"	"	"	"	P3 to T _{CD}	"	"	"	
		188	"		OUT	"	0.0 V				"	0.0 V	"	2/			IN	2.7 V	"	MR to Q0	5.0	14.5	"	
		189	2.7 V	OUT		"	"	"	"			"	"	"	"	"	"	0.0 V	"	"	MR to Q1	"	"	"
	t	190	0.0 V			"	"	"	OUT		"	"	2.7 V	"	"	"	"	"	"	MR to Q2	"	"	"	
		191	0.0 V			"	"	"	"	OUT		"	0.0 V	"	"		"	"	"	MR to Q3	"	"	"	
		Same tests and terminal conditions as for subgroup 9, except T _a = +125°C and use limits from table I.																						
10	Same tests and terminal conditions as for subgroup 9, except T _a = +125°C and use limits from table I.																							
11	Same tests, terminal conditions and limits as for subgroup 10, except T _a = -55°C.																							

1/ For cases X and 2, pins not referenced are NC.

2/ Apply one pulse prior to measurement.



3/ For device type 02, Circuit A, the I_{IL1} minimum and maximum test limits of measured terminal $\overline{SR}$, shall be the same as those listed for the I_{IL2} test, Circuit A, herein.

Parameter	Device	Circuit A	Circuit B	Circuit C	Circuit D
I_{IL1}	All	-0.25/-0.6	-0.03/-0.6	-0.25/-0.6	0/-0.6
I_{IL2}	01, 02	-0.50/-1.2	-0.06/-1.2	-0.50/-1.2	0/-0.6
	03, 04	-0.75/-1.8	-0.09/-1.8	-0.50/-1.8	

4/ For types 01 and 02, set outputs to 15th count (P0, P1, P2, P3 = 1), prior to measurement.

5/ $H \geq 1.5$ V, $L \leq 1.5$ V, A = 3.0 V minimum; B = 0.0 V or GND.

6/ Perform function sequence at $V_{CC} = 4.5$ V and repeat at $V_{CC} = 5.5$ V.

7/ The f_{MAX} minimum limit specified is the frequency of the input pulse. The output frequency shall be one-half of the input frequency.

8/ For types 01 and 02, increment such that measurement of the specified output can occur on the next applied CP.

9/ f_{MAX} shall be measured only under the conditions of initial qualification and after process or design changes which may affect this parameter. For all other conditions, f_{MAX} shall be guaranteed, if not tested, to the limits specified in table III, herein.

5. PACKAGING

5.1 Packaging requirements. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Service or Defense Agency, or within the military service's system command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

- a. Title, number, and date of the specification.
- b. PIN and compliance identifier, if applicable (see 1.2).
- c. Requirements for delivery of one copy of the conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.
- d. Requirements for certificate of compliance, if applicable.
- e. Requirements for notification of change of product or process to contracting activity in addition to notification to the qualifying activity, if applicable.
- f. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action, and reporting of results, if applicable.
- g. Requirements for product assurance options.
- h. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements should not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.
- i. Requirements for "JAN" marking.
- j. Packaging requirements (see 5.1).

6.3 Superseding information. The requirements of MIL-M-38510 have been superseded to take advantage of the available Qualified Manufacturer Listing (QML) system provided by MIL-PRF-38535. Previous references to MIL-M-38510 in this document have been replaced by appropriate references to MIL-PRF-38535. All technical requirements now consist of this specification and MIL-PRF-38535. The MIL-M-38510 specification sheet number and PIN have been retained to avoid adversely impacting existing government logistics systems and contractor's parts lists.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-38535 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DSCC-VQ, 3990 E. Broad Street, Columbus, Ohio 43123-1199.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535, MIL-HDBK-1331, and as follows:

GND Ground zero voltage potential
 V_{IN} Voltage level at an input terminal
 I_{IN} Current flowing into an input terminal

6.6 Logistic support. Lead materials and finishes (see 3.4) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish A (see 3.4). Longer length leads and lead forming should not affect the part number.

6.7 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-35810 device types and may have slight physical variations in relation to case size. The presence of this information should not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-PRF-38535.

Military device type	Generic-industry type
01	54F161A
02	54F163A
03	54F191
04	54F193

6.8 Manufacturers' designation. Manufacturers' circuits which form a part of this specification are designated with an "X" as shown in table IV herein.

TABLE IV. Manufacturers' designations.

Device type	A	B	C	D
	National Semiconductor	Motorola Inc.	Signetics Corp.	Texas Instruments
01	X		X	X
02	X		X	X
03	X			
04	X			

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:

DLA - CC

(Project 5962-2026)

Review activities:

Army - MI, SM
Navy - AS, CG, MC, SH, TD
Air Force - 03, 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.