





LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REVISED PER ECO-08-010814	15MAY08	HMR	MZ

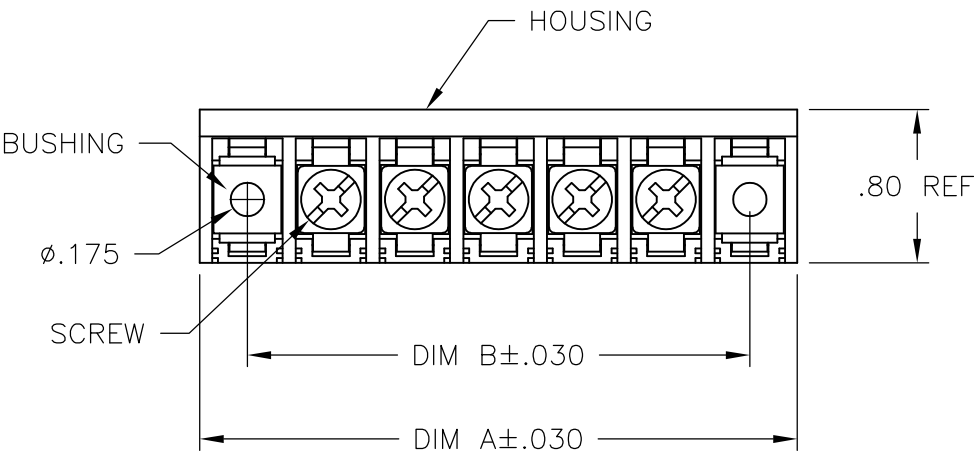


MATERIALS:
HOUSING: THERMOPLASTIC, UL94V-0, BLACK.
TERMINAL: BRIGHT TIN PLATED COPPER ALLOY.
SCREWS: 8-32 ZINC PLATED STEEL.

ELECTRICAL:
CURRENT RATING: 30A
VOLTAGE RATING: 600V
WIRE RANGE: 10-18 AWG (UL)
10-22 AWG (CSA)


MECHANICAL:
RECOMMENDED TORQUE: 20 IN-LB.
OPERATING TEMP.: -40°C TO +120°C.

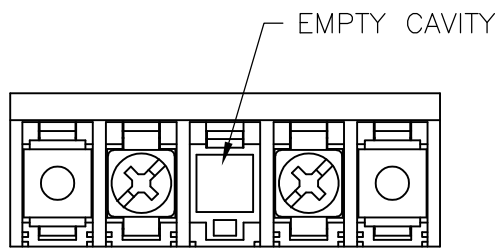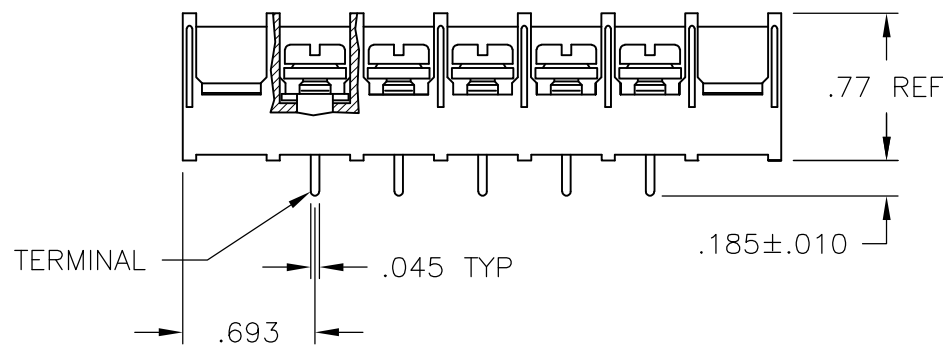


1546156-1

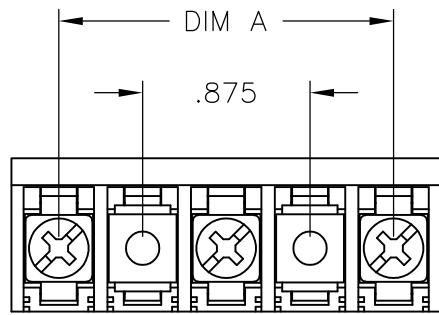

7-1437657-3

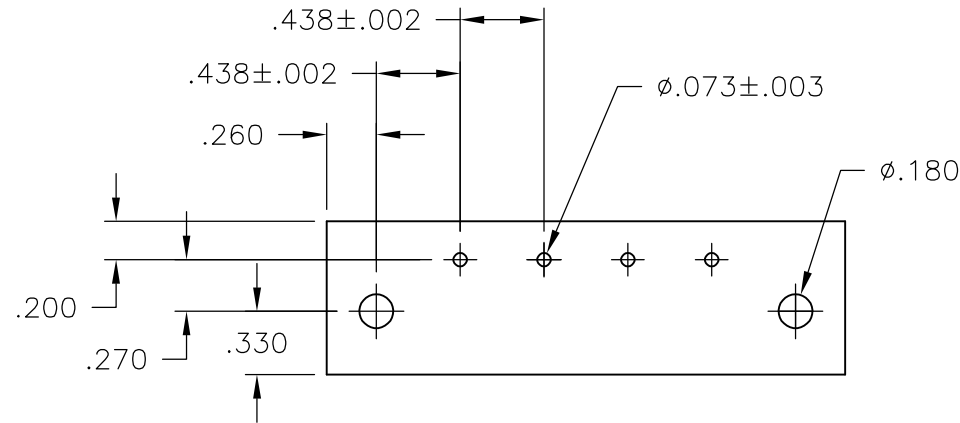

RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 2/25/03	 Tyco Electronics Corporation Harrisburg, PA 17105-3608				
		CHK H WAKEEM 2/25/03					
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± 1'	APVD H WAKEEM 2/25/03	NAME 8PCV-XX-008 ASSEMBLY				
		PRODUCT SPEC —					
		APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL —	FINISH —	WEIGHT —	A3	00779	C-7-1437657-1	—	
CUSTOMER DRAWING					SCALE 1:1	SHEET 1 of 2	REV E

