


## Printed-circuit board connector - MVSTBR 2,5/ 4-ST-5,08 BD2: +AI- - 1706680

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The figure shows a 10-position version of the product

PCB connector, nominal cross section: 2.5 mm<sup>2</sup>, color: green, nominal current: 12 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, Number of potentials: 4, Number of rows: 1, Number of positions per row: 4, number of connections: 4, product range: MVSTBR 2,5/...-ST, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, conductor/PCB connection direction: 90 °, Locking clip: - Locking clip, plug-in system: CLASSIC COMBICON, Locking: without, type of packaging: packed in cardboard

### Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors



### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 50 pc                                                                                                   |
| GTIN         | <br>4 055626 170961 |
| GTIN         | 4055626170961                                                                                           |

### Technical data

#### Item properties

|                           |                   |
|---------------------------|-------------------|
| Brief article description | PCB connector     |
| Plug-in system            | CLASSIC COMBICON  |
| Type of contact           | Female connector  |
| Range of articles         | MVSTBR 2,5/...-ST |
| Pitch                     | 5.08 mm           |
| Number of positions       | 4                 |
| Drive form screw head     | Slotted (L)       |
| Number of levels          | 1                 |
| Number of connections     | 4                 |
| Number of potentials      | 4                 |

# Printed-circuit board connector - MVSTBR 2,5/ 4-ST-5,08 BD2: +AI- - 1706680

## Technical data

### Electrical parameters

|                             |       |
|-----------------------------|-------|
| Nominal current             | 12 A  |
| Nom. voltage                | 320 V |
| Rated voltage (III/3)       | 250 V |
| Rated voltage (III/2)       | 320 V |
| Rated voltage (II/2)        | 630 V |
| Rated surge voltage (III/3) | 4 kV  |
| Rated surge voltage (III/2) | 4 kV  |
| Rated surge voltage (II/2)  | 4 kV  |

### Connection capacity

|                                                                                           |                                              |
|-------------------------------------------------------------------------------------------|----------------------------------------------|
| Connection method                                                                         | Screw connection with tension sleeve         |
| pluggable                                                                                 | Yes                                          |
| Conductor cross section solid                                                             | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible                                                          | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG / kcmil                                                       | 24 ... 12                                    |
| Conductor cross section flexible, with ferrule without plastic sleeve                     | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section, flexible, with ferrule, with plastic sleeve                      | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| 2 conductors with same cross section, solid                                               | 0.2 mm <sup>2</sup> ... 1 mm <sup>2</sup>    |
| 2 conductors with same cross section, flexible                                            | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm <sup>2</sup> ... 1 mm <sup>2</sup>   |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Cylindrical gauge a x b / diameter                                                        | 2.8 mm x 2.0 mm / 2.4 mm                     |
| Stripping length                                                                          | 7 mm                                         |
| Torque                                                                                    | 0.5 Nm ... 0.6 Nm                            |

### Material data - contact

|                                          |                                                                                   |
|------------------------------------------|-----------------------------------------------------------------------------------|
| Note                                     | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/ JEDEC JESD 201 |
| Contact material                         | Cu alloy                                                                          |
| Surface characteristics                  | hot-dip tin-plated                                                                |
| Metal surface terminal point (top layer) | Tin (4 - 8 µm Sn)                                                                 |
| Metal surface contact area (top layer)   | Tin (4 - 8 µm Sn)                                                                 |

### Material data - housing

|                                                              |              |
|--------------------------------------------------------------|--------------|
| Housing color                                                | green (6021) |
| Insulating material                                          | PA           |
| Insulating material group                                    | I            |
| CTI according to IEC 60112                                   | 600          |
| Flammability rating according to UL 94                       | V0           |
| Glow wire flammability index GWFI according to EN 60695-2-12 | 850          |

# Printed-circuit board connector - MVSTBR 2,5/ 4-ST-5,08 BD2: +AI- - 1706680

## Technical data

### Material data - housing

|                                                                   |        |
|-------------------------------------------------------------------|--------|
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775    |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C |

### Dimensions for the product

|                             |                                                                                            |
|-----------------------------|--------------------------------------------------------------------------------------------|
| Caption                     | Schematische Abbildung - weitere Details siehe Produktfamilienzeichnung im Download Center |
| Length [ l ]                | 12.5 mm                                                                                    |
| Width [ w ]                 | 20.32 mm                                                                                   |
| Height [ h ]                | 26 mm                                                                                      |
| Pitch                       | 5.08 mm                                                                                    |
| Height (without solder pin) | 26 mm                                                                                      |

### Packaging information

|                            |                     |
|----------------------------|---------------------|
| Type of packaging          | packed in cardboard |
| Pieces per package         | 50                  |
| Denomination packing units | Pcs.                |

### General product information

|      |                                                                                                                                                                                          |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note | In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load. |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Ambient conditions

|                                         |                                                     |
|-----------------------------------------|-----------------------------------------------------|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |

### Termination and connection method

|                                          |                     |
|------------------------------------------|---------------------|
| Test for conductor damage and slackening | IEC 60999-1:1999-11 |
|                                          | Test passed         |

### Pull-out test

|                                                          |                             |
|----------------------------------------------------------|-----------------------------|
| Pull-out test                                            | IEC 60999-1:1999-11         |
| Conductor cross section / conductor type / tensile force | 0.2 mm² / solid / > 10 N    |
|                                                          | 0.2 mm² / flexible / > 10 N |
|                                                          | 2.5 mm² / solid / > 50 N    |
|                                                          | 2.5 mm² / flexible / > 50 N |

### Mechanical tests according to standard

|                                |                        |
|--------------------------------|------------------------|
| Test specification             | IEC 61984              |
| Visual inspection              | IEC 60512-1-1:2002-02  |
| Dimension check                | IEC 60512-1-2:2002-02  |
| Resistance of inscriptions     | IEC 60068-2-70:1995-12 |
| Insertion and withdrawal force | IEC 60512-13-2:2006-02 |

# Printed-circuit board connector - MVSTBR 2,5/ 4-ST-5,08 BD2: +AI- - 1706680

## Technical data

### Mechanical tests according to standard

|                                     |                        |
|-------------------------------------|------------------------|
| No. of cycles                       | 25                     |
| Insertion strength per pos. approx. | 8 N                    |
| Withdraw strength per pos. approx.  | 6 N                    |
| Polarization and coding             | IEC 60512-13-5:2006-02 |
| Contact holder in insert            | IEC 60512-15-1:2008-05 |
| Test force per pos.                 | 33 N                   |

### Air clearances and creepage distances

|                                                 |                                                     |
|-------------------------------------------------|-----------------------------------------------------|
| Clearances and creepage distances               | IEC 60664-1:2007-04                                 |
| Specification                                   | IEC 60664-1:2007-04                                 |
| Minimum clearance - inhomogeneous field (III/3) | 3 mm                                                |
| Minimum clearance - inhomogeneous field (III/2) | 3 mm                                                |
| Minimum clearance - inhomogeneous field (II/2)  | 3 mm                                                |
| Minimum creepage distance value (III/3)         | 3.2 mm                                              |
| Minimum creepage distance value (III/2)         | 3 mm                                                |
| Minimum creepage distance value (II/2)          | 3.2 mm                                              |
| Note on connection cross section                | With connected conductor 4 mm <sup>2</sup> (solid). |

### Current carrying capacity / derating curves

|         |                                                            |
|---------|------------------------------------------------------------|
| Caption | Type: MVSTBR 2,5/...-ST-5,08 with CC 2,5/...-G-5,08 P26THR |
|---------|------------------------------------------------------------|

### Mechanical tests (A)

|                                              |             |
|----------------------------------------------|-------------|
| Test specification                           | IEC 61984   |
| Insertion strength per pos. approx.          | 8 N         |
| Withdraw strength per pos. approx.           | 6 N         |
| Polarization when inserted requirement >20 N | Test passed |
| Contact holder in insert requirements >20 N  | Test passed |

### Durability tests (B)

|                                        |                       |
|----------------------------------------|-----------------------|
| Specification                          | IEC 60512-9-1:2010-03 |
| Contact resistance R <sub>1</sub>      | 2.5 mΩ                |
| Insertion/withdrawal cycles            | 25                    |
| Contact resistance R <sub>2</sub>      | 2.5 mΩ                |
| Impulse withstand voltage at sea level | 4.8 kV                |

### Thermal tests (C)

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Specification                                   | IEC 60512-5-1:2002-02 |
| Number of positions                             | 12                    |
| Upper limiting temperature requirements <100 °C | Test passed           |

### Climatic tests (D)

|               |                  |
|---------------|------------------|
| Specification | ISO 6988:1985-02 |
| Cold stress   | -40 °C/2 h       |

# Printed-circuit board connector - MVSTBR 2,5/ 4-ST-5,08 BD2: +AI- - 1706680

## Technical data

### Climatic tests (D)

|                                        |                                                                           |
|----------------------------------------|---------------------------------------------------------------------------|
| Thermal stress                         | 100 °C/168 h                                                              |
| Corrosive stress                       | 0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> /40 °C/1 cycle |
| Impulse withstand voltage at sea level | 4.8 kV                                                                    |
| Power-frequency withstand voltage      | 2.21 kV                                                                   |

### Environmental and durability tests (E)


|                                       |                                     |
|---------------------------------------|-------------------------------------|
| Specification                         | IEC 61984:2008-10                   |
| Result, degree of protection, IP code | Finger safety with IP20 test finger |

### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| China RoHS | Environmentally Friendly Use Period = 50 years                                                      |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


## Drawings

Diagram

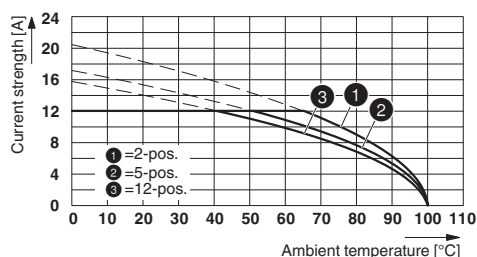


Type: MVSTBR 2,5/...-ST-5,08 with CC 2,5/...-G-5,08 P26THR

Diagram

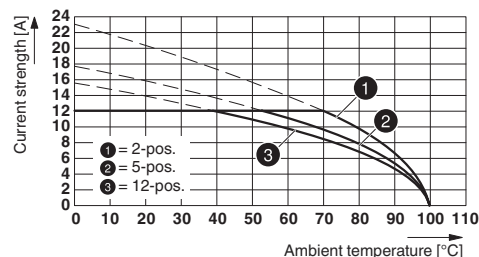


Type: MVSTBR 2,5/...-ST-5,08 with CCV 2,5/...-G-5,08 P26THR

Diagram

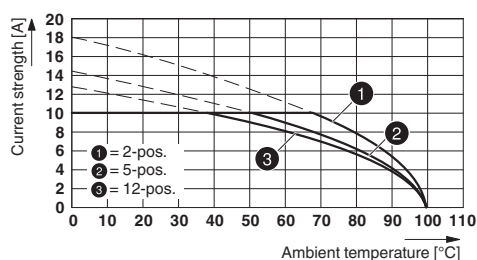

Type: MVSTB(R/W) 2,5/...-ST-5,08 with MDSTBA 2,5/...-G-5,08


Diagram

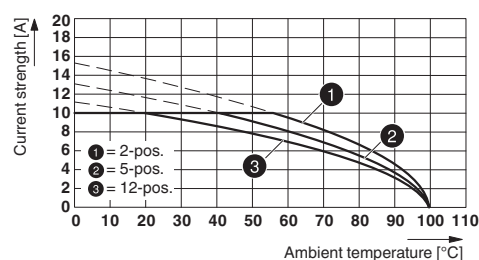

Type: MVSTB(R/W) 2,5/...-ST with MDSTBV 2,5/...-G-5,08


# Printed-circuit board connector - MVSTBR 2,5/ 4-ST-5,08 BD2: +AI- - 1706680

Diagram

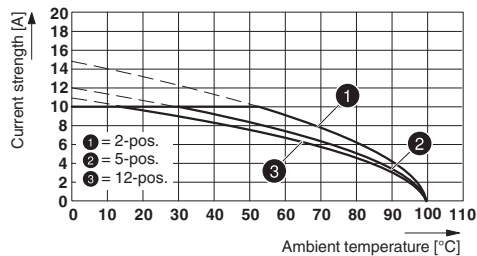


Type: MVSTB(R/W) 2,5/...-ST with MDSTBVA 2,5/...-G-5,08

Diagram

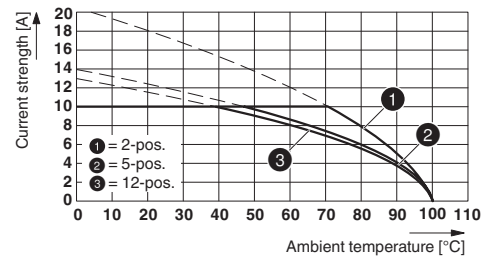


Type: MVSTB(R/W) 2,5/...-ST-5,08 with MDSTBW 2,5/...-G-5,08

Diagram

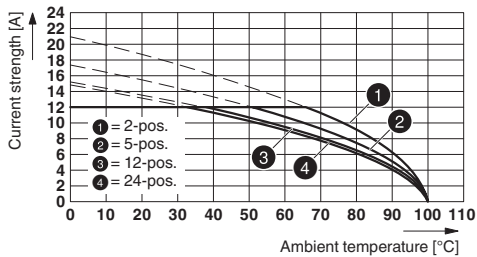


Type: MVSTBR 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08

Diagram

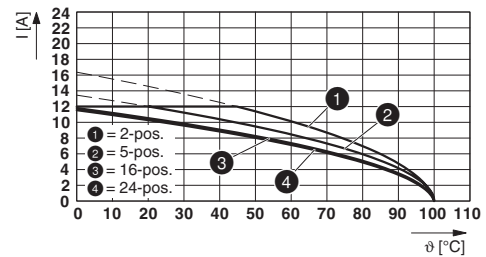


Type: MVSTB(R/W) 2,5/...-ST-5,08 with MSTBVA 2,5/...-G-5,08

Diagram

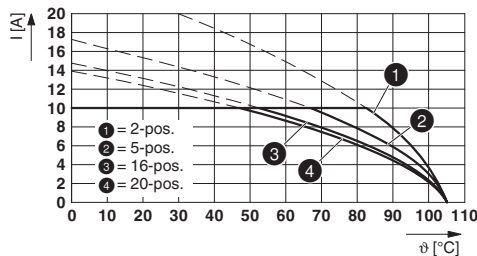


Type: MVSTBR 2,5/...-ST-5,08 with MDSTB 2,5/...-G1-5,08

Diagram

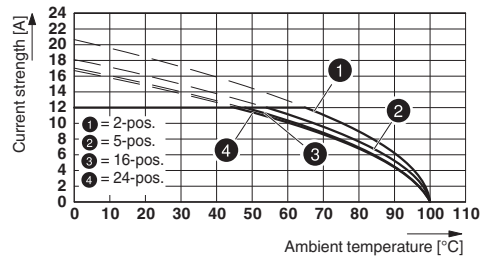

Type: MVSTBR 2,5/...-ST-5,08 with MSTBVK 2,5/...-G-5,08

Diagram

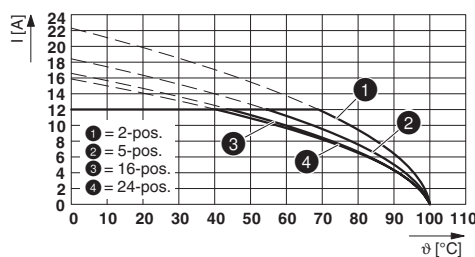

Type: MVSTBR 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

# Printed-circuit board connector - MVSTBR 2,5/ 4-ST-5,08 BD2: +AI- - 1706680

## Classifications

### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27440309 |
| eCl@ss 11.0   | 27460202 |
| eCl@ss 4.0    | 27260700 |
| eCl@ss 4.1    | 27260700 |
| eCl@ss 5.0    | 27260700 |
| eCl@ss 5.1    | 27260700 |
| eCl@ss 6.0    | 27260700 |
| eCl@ss 7.0    | 27440309 |
| eCl@ss 9.0    | 27440309 |

### ETIM

|          |          |
|----------|----------|
| ETIM 6.0 | EC002638 |
| ETIM 7.0 | EC002638 |

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 39121409 |
| UNSPSC 18.0 | 39121409 |
| UNSPSC 19.0 | 39121409 |
| UNSPSC 20.0 | 39121409 |
| UNSPSC 21.0 | 39121409 |

## Approvals

### Approvals

#### Approvals

VDE Zeichengenehmigung / CSA / IECCEB CB Scheme / EAC / cULus Recognized

#### Ex Approvals

### Approval details

|                        |                                                                                     |                                                                                                                                                                                                           |          |
|------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Zeichengenehmigung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40050694 |
| Nominal voltage UN     | 250 V                                                                               |                                                                                                                                                                                                           |          |
| Nominal current IN     | 12 A                                                                                |                                                                                                                                                                                                           |          |
| mm²/AWG/kcmil          | 0.2-2.5                                                                             |                                                                                                                                                                                                           |          |

## Printed-circuit board connector - MVSTBR 2,5/ 4-ST-5,08 BD2: +AI- - 1706680

### Approvals

|                    |                                                                                   |                                                                                                                                         |                 |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| CSA                |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | LR13631-2585950 |
|                    | B                                                                                 | D                                                                                                                                       |                 |
| Nominal voltage UN | 300 V                                                                             | 300 V                                                                                                                                   |                 |
| Nominal current IN | 10 A                                                                              | 10 A                                                                                                                                    |                 |
| mm²/AWG/kcmil      | 28-12                                                                             | 28-12                                                                                                                                   |                 |

|                    |                                                                                   |                                                           |                |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
| IECEE CB Scheme    |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-60988-B1B2 |
|                    |                                                                                   |                                                           |                |
| Nominal voltage UN | 250 V                                                                             |                                                           |                |
| Nominal current IN | 12 A                                                                              |                                                           |                |
| mm²/AWG/kcmil      | 0.2-2.5                                                                           |                                                           |                |

|     |                                                                                     |         |
|-----|-------------------------------------------------------------------------------------|---------|
| EAC |  | B.01687 |
|-----|-------------------------------------------------------------------------------------|---------|

|                    |                                                                                     |                                                                                                                                                       |                 |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19931011 |
|                    | B                                                                                   | D                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                               | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 15 A                                                                                | 10 A                                                                                                                                                  |                 |
| mm²/AWG/kcmil      | 30-12                                                                               | 30-12                                                                                                                                                 |                 |

Phoenix Contact 2021 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>