




# Long Life Potentiometer - 2 Million Cycles, Heavy Duty - Cermet, Fully Sealed

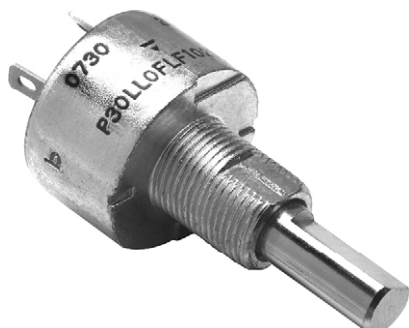

## FEATURES

- 2 million cycles
- High power rating 3 W at 70 °C
- Cermet element
- Low temperature coefficient ( $\pm 150$  ppm/°C typical)
- Custom designs on request
- Tests according to CECC 41000 or IEC 60393-1
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


**RoHS**  
COMPLIANT


## LINK TO ADDITIONAL RESOURCES




| QUICK REFERENCE DATA    |                                                   |
|-------------------------|---------------------------------------------------|
| Multiple module         | No                                                |
| Switch module           | n/a                                               |
| Detent module           | n/a                                               |
| Special electrical laws | A: linear, L: logarithmic, F: reverse logarithmic |
| Sealing level           | IP 67                                             |
| Lifespan                | 2M cycles                                         |

## DIMENSIONS in millimeters (inches) $\pm 0.5$ mm ( $\pm 0.02$ " )



### P30LL

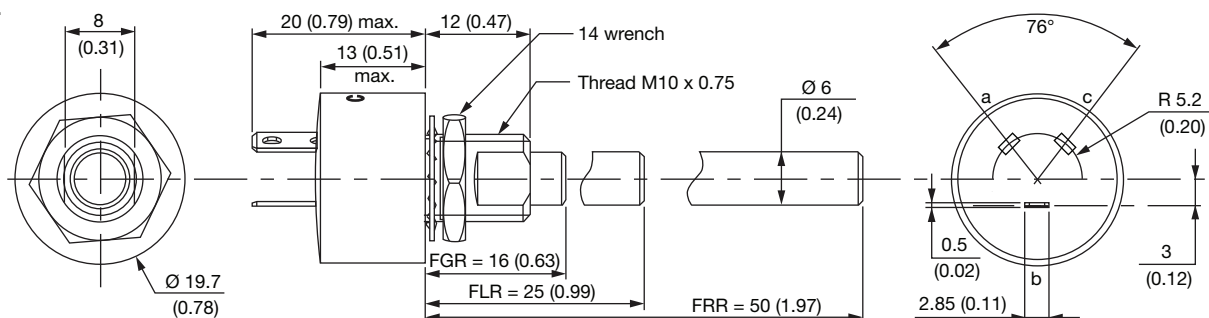

### P30LLL: LPRP - Locating peg

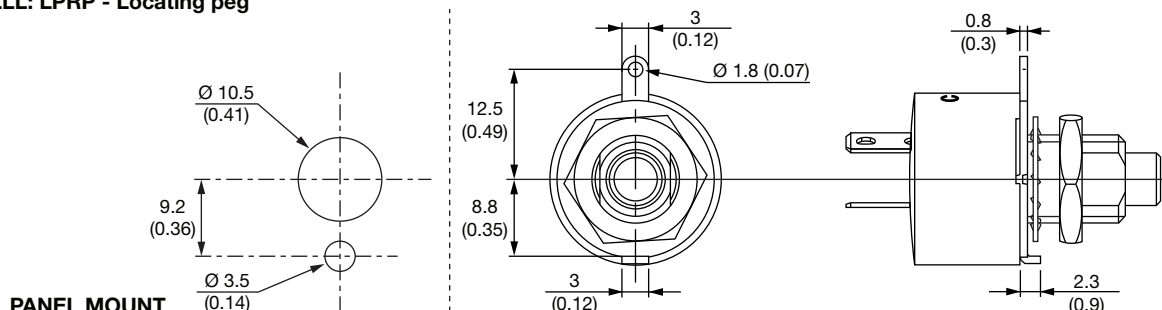


**DIMENSIONS** in millimeters (inches)  $\pm 0.5$  mm ( $\pm 0.02$ ")

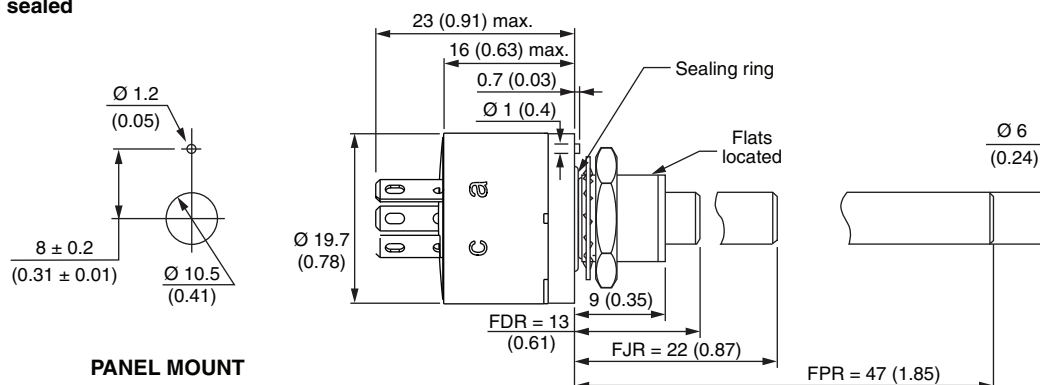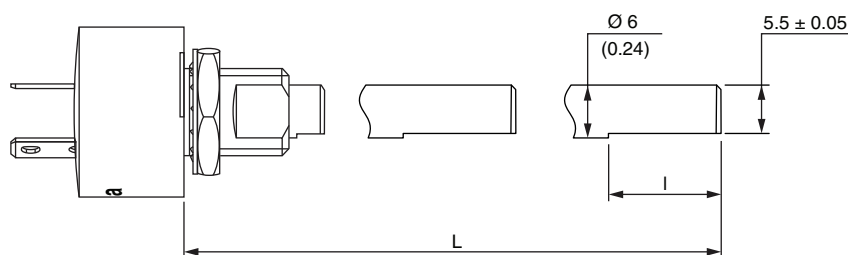**P30LME: Panel sealed**

**PANEL MOUNT**
**Standard shaft style F (flatted)**


| MODEL | SHAFT CONFIGURATION | L (mm) | I (mm) |
|-------|---------------------|--------|--------|
| P30LL | FGF                 | 16     | 3.17   |
|       | FLF                 | 25     | 12     |
|       | FRF                 | 30     | 12     |
| P30LM | FDF                 | 13     | 3.17   |
|       | FJF                 | 22     | 12     |
|       | FPF                 | 47     | 12     |

**Note**

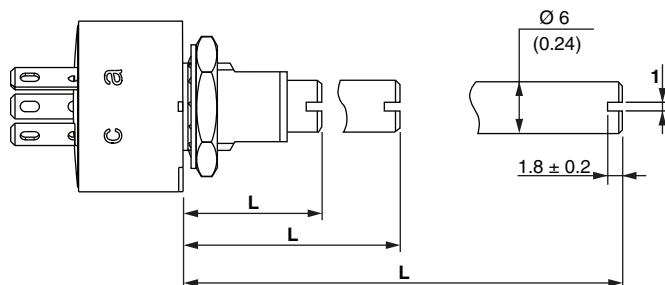- Shaft shown at center position. Flat opposite to the wiper




**Standard shaft style S (slotted)**


| MODEL | SHAFT CONFIGURATION | L (mm) |
|-------|---------------------|--------|
| P30LL | FGS                 | 16     |
|       | FLS                 | 25     |
|       | FRS                 | 50     |
| P30LM | FDS                 | 13     |
|       | FJS                 | 22     |
|       | FPS                 | 47     |

**Note**

- Slot aligned to the wiper at  $\pm 10^\circ$

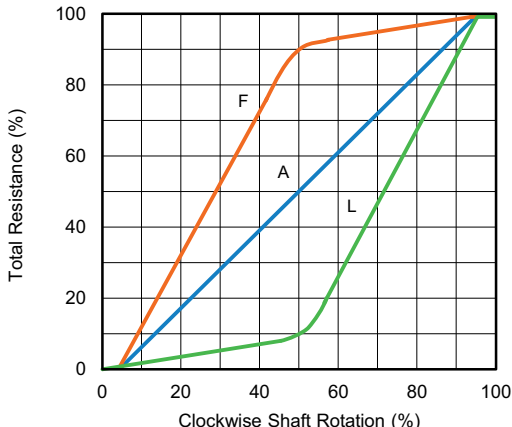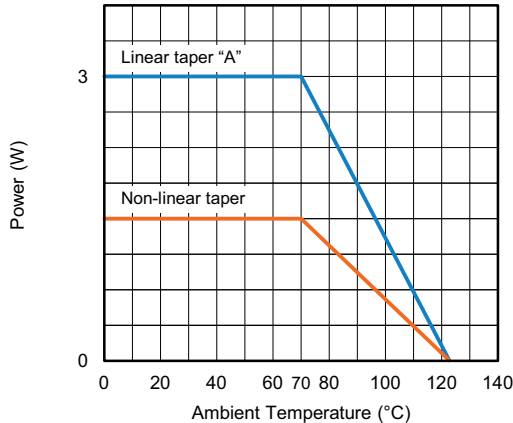

| ELECTRICAL SPECIFICATIONS                    |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
|----------------------------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-------------------------------------------------------------------------------------|-----------------------------|--------------|--|------------------|--|-------------------------------|--------------------------------|-------------------------------|--------------------------------|---|---|------|-----|------|---|---|-----|-----|------|----|---|-----|-----|-----|----|-----|-----|-----|-----|
| Resistive element                            |                               | Cermet                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Electrical travel                            |                               | 270° ± 10°                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Standard resistance values                   |                               | 1 kΩ - 5 kΩ - 10 kΩ - 50 kΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Tolerance                                    |                               | 20 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Taper                                        |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Power rating                                 |                               | Linear<br>Non-linear taper                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 3 W at 70 °C<br>1.5 W at 70 °C |  |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Circuit diagram                              |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Standard resistance element data             |                               | <table><tr><th rowspan="2">RESISTANCE<br/>VALUE<br/>(kΩ)</th><th colspan="2">LINEAR TAPER</th><th colspan="2">NON-LINEAR TAPER</th></tr><tr><th>MAX. POWER<br/>AT 70 °C<br/>(W)</th><th>MAX. WORKING<br/>VOLTAGE<br/>(V)</th><th>MAX. POWER<br/>AT 70 °C<br/>(W)</th><th>MAX. WORKING<br/>VOLTAGE<br/>(V)</th></tr><tr><td>1</td><td>3</td><td>54.8</td><td>1.5</td><td>38.7</td></tr><tr><td>5</td><td>3</td><td>122</td><td>1.5</td><td>86.6</td></tr><tr><td>10</td><td>3</td><td>173</td><td>1.5</td><td>122</td></tr><tr><td>50</td><td>1.8</td><td>300</td><td>1.5</td><td>274</td></tr></table> |                                |                                                                                     | RESISTANCE<br>VALUE<br>(kΩ) | LINEAR TAPER |  | NON-LINEAR TAPER |  | MAX. POWER<br>AT 70 °C<br>(W) | MAX. WORKING<br>VOLTAGE<br>(V) | MAX. POWER<br>AT 70 °C<br>(W) | MAX. WORKING<br>VOLTAGE<br>(V) | 1 | 3 | 54.8 | 1.5 | 38.7 | 5 | 3 | 122 | 1.5 | 86.6 | 10 | 3 | 173 | 1.5 | 122 | 50 | 1.8 | 300 | 1.5 | 274 |
| RESISTANCE<br>VALUE<br>(kΩ)                  | LINEAR TAPER                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | NON-LINEAR TAPER               |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
|                                              | MAX. POWER<br>AT 70 °C<br>(W) | MAX. WORKING<br>VOLTAGE<br>(V)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | MAX. POWER<br>AT 70 °C<br>(W)  | MAX. WORKING<br>VOLTAGE<br>(V)                                                      |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| 1                                            | 3                             | 54.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1.5                            | 38.7                                                                                |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| 5                                            | 3                             | 122                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1.5                            | 86.6                                                                                |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| 10                                           | 3                             | 173                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1.5                            | 122                                                                                 |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| 50                                           | 1.8                           | 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1.5                            | 274                                                                                 |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Temperature coefficient (typical)            |                               | ± 150 ppm/°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Limiting element voltage                     |                               | 300 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| End resistance (typical)                     |                               | 1 Ω                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Dielectric strength (RMS)                    |                               | 2500 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Insulation resistance (300 V <sub>DC</sub> ) |                               | 10 <sup>5</sup> MΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |
| Independent linearity (typical)              |                               | ± 5 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                |                                                                                     |                             |              |  |                  |  |                               |                                |                               |                                |   |   |      |     |      |   |   |     |     |      |    |   |     |     |     |    |     |     |     |     |

**MECHANICAL SPECIFICATIONS**

|                                   |                             |                     |
|-----------------------------------|-----------------------------|---------------------|
| Mechanical travel                 | $300^{\circ} \pm 5^{\circ}$ |                     |
| Operating torque / typical value  | 2 Ncm                       | 2.83 oz.-inch       |
| End stop torque                   | 70 Ncm max.                 | 99 oz.-inch max.    |
| Tightening torque of mounting nut | 250 Ncm max.                | 22.13 lb-inch max.  |
| Unit weight                       | 23 g to 32 g max.           | 0.8 oz. to 1.13 oz. |
| Terminals                         | e3: pure Sn                 |                     |

**ENVIRONMENTAL SPECIFICATIONS**

|                   |                                                 |  |
|-------------------|-------------------------------------------------|--|
| Temperature range | $-55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ |  |
| Climatic category | 55/125/56                                       |  |
| Sealing           | Fully sealed - container IP67                   |  |

**OPTIONS**

|                               |                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Special feature command shaft | Length is measured from the mounting surface to the free end of the shaft. The screwdriver slot is aligned with the wiper within $\pm 10^{\circ}$ . Special shafts are available, in accordance to drawings supplied by customers. We recommend that customers should not machine tool shafts, in order to avoid damage. Bending or torsion of terminals should also be avoided. |
| Panel sealing                 | The panel sealing device consists of a ring located in a groove on the potentiometer face. Sealing is obtained by tightening the ring against the panel when mounting the potentiometer.                                                                                                                                                                                         |
| Locating peg                  | Location is obtained by fitting a special washer on the mounting face of the potentiometer.                                                                                                                                                                                                                                                                                      |


**MARKING**

- Vishay trademark
- Full ordering information (see Ordering Information table)
- Manufacturing date code
- Marking of terminals 3, and a, b, c

**APPLICATION NOTE**

The potentiometer shall be used in voltage divider with an impedance load at least 100 times higher than the total potentiometer nominal resistance value.

Advised load impedance:  
1 M $\Omega$  min. for resistance range of 1k $\Omega$  to 50 k $\Omega$



| PERFORMANCE             |                                                                                                   |                           |                              |                                    |
|-------------------------|---------------------------------------------------------------------------------------------------|---------------------------|------------------------------|------------------------------------|
| TESTS                   | CONDITIONS                                                                                        | TYPICAL VALUES AND DRIFTS |                              |                                    |
|                         |                                                                                                   | $\Delta R_T/R_T$ (%)      | $\Delta R_{1-2}/R_{1-2}$ (%) | OTHER                              |
| Electrical endurance    | 1000 h at rated power<br>90°/30° - ambient temp. 70 °C                                            | ± 20 %                    | ± 20 %                       | -                                  |
| Climatic sequence       | Phase A dry heat 125 °C<br>Phase B damp heat<br>Phase C cold -55 °C<br>Phase D damp heat 5 cycles | ± 0.5 %                   | ± 1 %                        | -                                  |
| Damp heat, steady state | 56 days<br>40 °C 93 % HR                                                                          | ± 0.5 %                   | ± 1 %                        | Insulation resistance:<br>> 100 MΩ |
| Change of temperature   | 5 cycles<br>-55 °C at +125 °C                                                                     | ± 0.5 %                   | -                            | -                                  |
| Mechanical endurance    | 2 000 000 cycles at rated power<br>Turn angle: ± 60°<br>Temperature: 20 °C                        | ± 20 %                    | -                            | Independent linearity:<br>± 10 %   |
| Shock                   | 50 g's at 11 ms<br>3 successive shocks<br>in 3 directions                                         | ± 0.1 %                   | ± 0.2 %                      | -                                  |
| Vibration               | 10 Hz to 55 Hz<br>0.75 mm or 10 g's<br>during 6 h                                                 | ± 0.1 %                   | ± 0.2 %                      | -                                  |

**Note**

- Nothing stated herein shall be construed as a guarantee of quality or durability

| ORDERING INFORMATION (part number) |                                               |                                                                    |                                 |                                                                                                                  |                                                                                    |                                                        |           |                                                                    |                                                   |   |   |
|------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------|-----------|--------------------------------------------------------------------|---------------------------------------------------|---|---|
| P                                  | 3                                             | 0                                                                  | L                               | L                                                                                                                | 0                                                                                  | F                                                      | G         | R                                                                  | 1                                                 | 0 | 3 |
| MODEL                              | BUSHING                                       | OPTION                                                             | SHAFT                           |                                                                                                                  |                                                                                    | RESISTANCE CODE / TOLERANCE CODE / TAPER               |           |                                                                    | SPECIAL NUMBER                                    |   |   |
| P30L                               | L = M10 x 0.75<br>M = panel sealed M10 x 0.75 | 0 = none<br>E = with locating peg (for M bushing only)<br>L = LPRP | Diameter                        | Length                                                                                                           | End Shaft Shape                                                                    | Ohmic Value                                            | Tolerance | Taper                                                              | (if applicable) Given by Vishay for custom design |   |   |
|                                    |                                               |                                                                    | F = Ø 6 mm<br>AP = custom shaft | For L bushing<br>G = 16 mm<br>L = 25 mm<br>R = 50 mm<br><br>For M bushing<br>D = 13 mm<br>J = 22 mm<br>P = 47 mm | R = round<br><br>On request:<br>S = slotted<br>D = custom end shaft<br>F = flatted | 102 = 1 kΩ<br>502 = 5 kΩ<br>103 = 10 kΩ<br>503 = 50 kΩ | M = 20 %  | A = linear<br>L = logarithmic<br>F = inverse clockwise logarithmic |                                                   |   |   |

| PART NUMBER DESCRIPTION (for information only) |         |        |       |       |           |       |         |           |         |         |                |
|------------------------------------------------|---------|--------|-------|-------|-----------|-------|---------|-----------|---------|---------|----------------|
| P30L                                           | L       | 0      | FGR   | 10K   | 20 %      | A     |         | BO10      |         |         | e3             |
| MODEL                                          | BUSHING | OPTION | SHAFT | VALUE | TOLERANCE | TAPER | SPECIAL | PACKAGING | SPECIAL | SPECIAL | LEAD (Pb)-FREE |

| ACCESSORIES                                  |                                                                        |
|----------------------------------------------|------------------------------------------------------------------------|
| Additional Accessories (to order separately) | <a href="http://www.vishay.com/doc?51051">www.vishay.com/doc?51051</a> |
| Control knobs                                | <a href="http://www.vishay.com/doc?51101">www.vishay.com/doc?51101</a> |

| RELATED DOCUMENTS                                                 |                                                                        |
|-------------------------------------------------------------------|------------------------------------------------------------------------|
| APPLICATION NOTES                                                 |                                                                        |
| Potentiometers and Trimmers                                       | <a href="http://www.vishay.com/doc?51001">www.vishay.com/doc?51001</a> |
| Guidelines for Vishay Sfernice Resistive and Inductive Components | <a href="http://www.vishay.com/doc?52029">www.vishay.com/doc?52029</a> |
| Capabilities and Custom Options                                   | <a href="http://www.vishay.com/doc?48485">www.vishay.com/doc?48485</a> |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.