

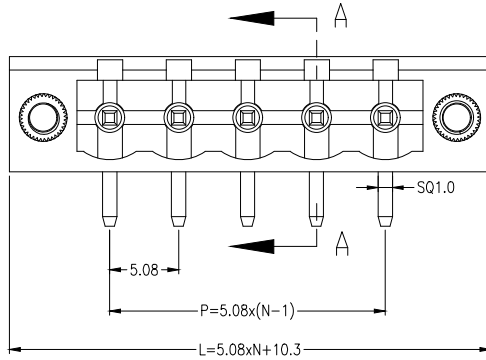
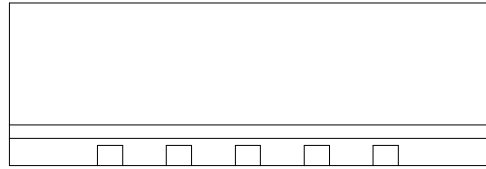
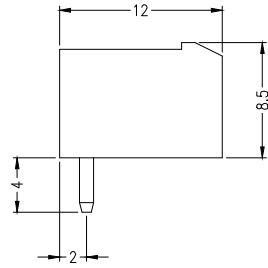


SECTION A-A

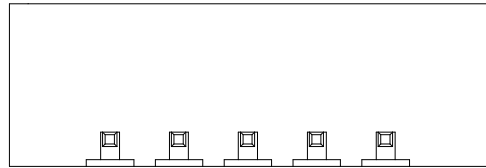

公差参数

Poles	Dim	Dim P	Dim L
2-6P		±0.10	±0.20
7-12P		±0.20	±0.30
13-18P		±0.25	±0.40
19-24P		±0.30	±0.50

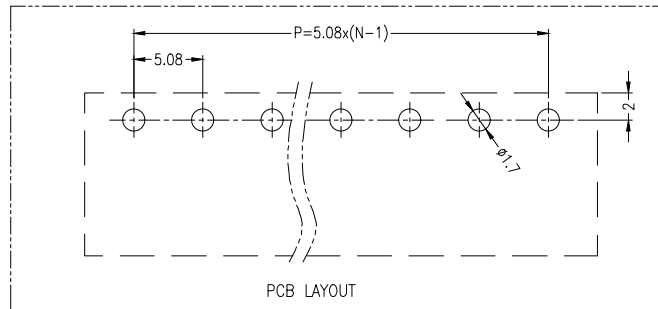

材料及电镀

- ①. 塑件主体: PA66, UL94V-0
②. 焊 针: 黄铜, 镀镍

电气性能

额定电压: 300V
额定电流: 15A
接触电阻: 20mΩ (Max)
绝缘电阻: 500MΩ \DC500V
耐 电 压: AC2000V\1Min

机械性能

温度范围: -40℃ ~ +105℃
瞬时温度: +250℃ , 5秒

Ordering Information

HC2EDG	*	*	-	*	-	NP	-	*
Type	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin
2-6P	7-12P	13-18P	19-24P	25-30P	31-36P	37-42P	43-48P	49-54P
2.54=2.54mm	3.5=3.50mm	3.81=3.81mm	5.08=5.08mm	7.62=7.62mm	7.62=7.62mm	7.62=7.62mm	7.62=7.62mm	7.62=7.62mm
No. of Pins	2-24Pin	2P=2Pin	3P=3Pin					
Colour	V=Green	L=Blue	O=Orange	R=Red	B=Black	GR=Gray		

			GENERAL TOLERANCE		制 图	深圳市华灿天禄电子有限公司			
			DIM TOL		DRAWING	ShenzhenhuacantianluELECTRONICS CO., LTD			
			X. X ±0.50		审 核	产品名称	5.08 单排 插拔式 接线端子	版 本	A
			X. XX ±0.30		CHECK	TITLE	带螺丝 弯针	REV.	
			X. XXX ±0.10		批 准	产品料号	HC2EDGRM-5.08-NP-X	单 位	mm
			Angle ±3.0°		APPROVAL	PART NO.		UNITS	
					比 例	材料		页 次	1/1
					SCALE			SHEET	
					投 影				
					Projection				