
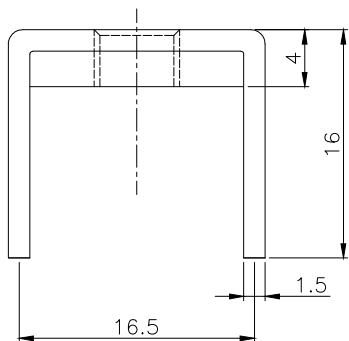
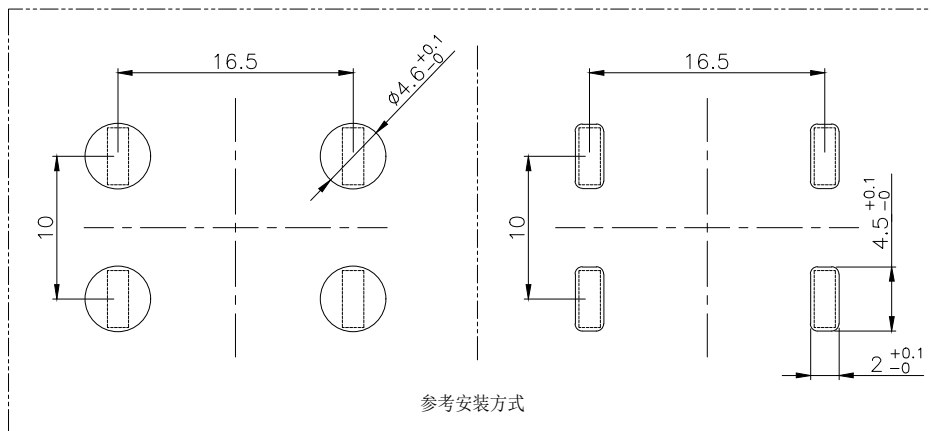


NOTES:

备注

1. Copper, nickel base, matte tin
黄铜H62, 镍底, 镀雾锡
2. Wire screw hole M6
压线螺孔M6
3. Current Rating: 120A
额定电流: 120A
4. Operating temperature: -40°C ~ +125°C
工作温度: -40°C ~ +125°C
5. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
6. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

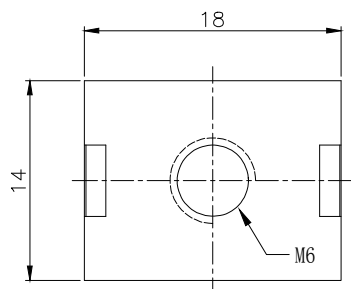

参考安装方式

Ordering Information

HC - * * * * - D * * * * - 02

Type	Screw Thread	Welding Feet	T=Anti Twist	Series	D-DIP	Product No.	Material
M-Pull Teeth (插牙)	3-4mm (螺牙)	2-2mm (焊脚)	0800-8mm (防止扭动)	0800-8mm	S-DIP	产品序号	默认-Copper (黄铜)
4-4mm (螺牙)	4-4mm (螺牙)	2-2mm (焊脚)			PD-Flang		BC=Red Copper (紫铜)
5-4mm (螺牙)	5-4mm (螺牙)	4-4mm (焊脚)					
6-4mm (螺牙)	6-4mm (螺牙)	6-4mm (焊脚)					

			GENERAL TOLERANCE	制 图 DRAWING	02	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK					
			5 or more ±0.35	批 准 APPROVAL		产品名称 TITLE	PCB 焊接端子 插板 铆垫片 M6 4焊脚 18x14x16mm	版 本 REV.	A
1	初版发行		2~5 ±0.25	比 例 SCALE		产品料号 PART NO.	HC-RG64-1814-D064-02	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	0~2 ±0.15	投 影 Projection		材料 MATERIAL		页 次 SHEET	1/1
			Angle ±3.0°						