

REVISION CH

DO NOT SCALE
FROM THIS PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES AND:
ONE PLACE DECIMALS $\pm .1$ [2.5mm] THREE PLACE DECIMALS $\pm .005$ [.13mm]
TWO PLACE DECIMALS $\pm .010$ [.25mm] FOUR PLACE DECIMALS $\pm .0020$ [.05mm]
ANGLES $\pm 2^\circ$

TITLE: HIGH TEMP
2MM SMT BOARD
STACKING TERMINAL
STRIP ASM
DWG NO:
TW-XX-XX-XXX-X-XXX-SM-XXX-XX
SHEET 1 OF 3

TABLE 1

LEAD STYLE	TERMINAL	MAX "A" ("B" IS .000 [.00] MIN)	"C" OVERALL PIN LENGTH
-02	T-1S13-02-XXX-2	.309 [7.85]	.377 [9.6]
-03	T-1S13-03-XXX-2	.467 [11.86]	.535 [13.6]
-04	T-1S13-06-XXX-2	.487 [12.37]	.555 [14.1]
-06	T-1S13-10-XXX-2	.605 [15.37]	.673 [17.1]
-07	T-1S13-11-XXX-2	.683 [17.35]	.751 [19.1]
-09	T-1S13-13-XXX-2	.388 [9.86]	.456 [11.6]

NOTES:

- MAX. PIN ROTATION IN BODY: 2°
- PUSHOUT FORCE SHALL BE 1 lb MIN.
- Ⓢ REPRESENTS A CRITICAL DIMENSION
- ALL DIMENSIONS IN BRACKETS [] TO BE MILLIMETERS.
- HEIGHT VARIATION BETWEEN ANY TWO PINS SHALL BE .010 MAX
- TUBE POSITIONS -04 THROUGH -36 ONLY; LAYER PACKAGE -02 & -03. TUBE PLUG MUST BE ALLIGNED WITH INSULATOR. (SEE DETAIL ON PAGE 2)
- MOLDED OR STAKED ALIGNMENT PIN AT SAMTEC'S DISCRETION.
- SPACE OPTION FROM .170 TO .209 REQUIRES AN ADDITIONAL REPRESS.
- MUST USE CARBIDE BLADES.
- M OPTION AVAILABLE ON -D ROW ONLY. -M OPTION AVAILABLE ON POSITIONS 4-36 ONLY. -P OPTION AVAILABLE ON 4-36 POSITION ONLY.
- DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION.
- S-A FOR EXISTING BUSINESS ONLY, NEW DESIGNS WILL BE AN ASP.

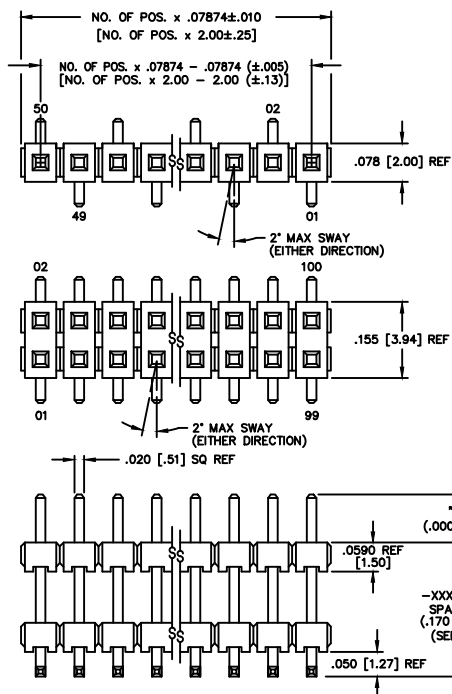


FIG 1

TW-XX-XX-XXX-X-XXX-SM-XXX-XX

No. OF POSITIONS
EXPRESSED IN # OF POS
(-02 THRU -36)
"XX" = No OF POS x .07874 [2.00]

LEAD STYLE
(SEE TABLE 1)

PLATING

- G: 10μ" GOLD IN CONTACT AREA, 10 GOLD ON TAIL (USE T-1S13-XX-G-2)
- T: MATTE TIN CONTACT AND TAIL (USE T-1S13-XX-T-2)
- S: 30μ" GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE T-1S13-XX-S-2)
- E: 50μ" GOLD IN CONTACT AREA, 3μ" GOLD ON TAIL (USE T-1S13-XX-E-2)
- L: 10μ" GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE T-1S13-XX-L-2)
- F: 3μ" GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE T-1S13-XX-F-2)
- P: 2μ" - 5μ" GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE T-1S13-XX-P-2)
- TL: TIN/LEAD (90%/10 +/-5%) CONTACT AND TAIL (USE T-1S13-XX-TL-2)
- STL: 30μ" GOLD IN CONTACT AREA, TIN/LEAD (90%/10 +/-5%) TAIL (USE T-1S13-XX-STL-2)
- LTL: 10μ" GOLD IN CONTACT AREA, (90%/10 +/-5%) TAIL (USE T-1S13-XX-LTL-2)
- H: 30μ" GOLD IN CONTACT AREA, 3μ" GOLD ON TAIL (USE T-1S13-XX-H-2)
- SM: 30μ" GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE T-1S13-XX-SM-2)
- TM: MATTE TIN CONTACT AND TAIL (USE T-1S13-XX-TM-2)
- LM: 10μ" GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE T-1S13-XX-LM-2)
- FM: 3μ" GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE T-1S13-XX-FM-2)

OPTION 1

- LC: LOCKING CLIP (SEE FIG 2, SHEET 2)(SEE NOTE 11)
- (-D ROW: USE 2TS-XX-D)
- (-S ROW: USE 2TS-XX-SV)
- (.190 MIN BOARD SPACE)
- *-A: MOLDED ALIGNMENT PIN (SEE FIG 3, SHEET 2 & NOTE 7) (AVAILABLE IN 2-36 POSITIONS) (2 POSITIONS WILL ONLY HAVE ONE ALIGNMENT PIN) (-D ROW: USE 2TS-XX-DV-A) (*-S ROW: USE 2TS-XX-SV-A) (*SEE NOTE 12)
- (BOTTOM BODY ONLY, USE TMM-50-X FOR TOP)
- STAKED ALIGNMENT PIN (SEE FIG 4, SHEET 2 & NOTE 7) (-D ROW ONLY: USE TMM-50-D, 4 POS MIN) (.190 MIN BOARD SPACE FOR BOTH)
- P: PICK & PLACE PAD (SEE NOTE 10) (-D ROW: USE PPP-10) (-S ROW: USE PPP-11)
- NOTE: "B" = .075 [1.91] MIN FOR THIS OPTION (SEE FIG 6)
- M: METAL PICK & PLACE PAD (SEE NOTE 10) (-D ROW: USE PPP-10)
- NOTE: "B" MUST BE .075 OR GREATER FOR THIS OPTION. (SEE FIG 5)
- TR: TAPE AND REEL PACKAGING (-07 LEAD STYLE NOT AVAILABLE IN T & R) (SEE SHEET 3 FOR -S-TR OPTION ORIENTATION VIEW) (.475 MAX "A" WHEN COMBINED WITH -P OPTION)

OPTION 2

- XXX: POLARIZED POSITION (SPECIFY OMITTED PIN)

SURFACE MOUNT

SPACE OPTION

- (SEE NOTE 8)
- XXX = "A" (SEE TABLE 1, .170 [4.32] MIN)


- S: SINGLE ROW (USE TMM-50-S)
- D: DOUBLE ROW (USE TMM-50-D)

(*=SEE NOTE 12)

TABLE 2 (SEE NOTE 6)

LEAD STYLE	OPTIONS	TUBE	PLUGS
-02, -04, -07, -09	-D, -D-LC, -D-A	PT-TW001-D-SM	TP-03
-03	-D, -D-LC, -D-A	PT-TW001-D-SM	TP-03
ALL	-S, -S-LC, -S-A	PT-TW002-S-SM	TP-24-02
-02, -09	-D-A-P, -D-LC-P, -D-P, -D-LC-M, -D-A-M, -D-M	PT-TW001-D-SM	TP-03
-03, -04	-D-A-P, -D-LC-P, -D-P, -D-LC-M, -D-A-M, -D-M	PT-TW001-D-SM	TP-03
-07	-D-A-P, -D-LC-P, -D-P, -D-LC-M, -D-A-M, -D-M	PT-TW001-D-SM	TP-03
-02, -09	-S-LC-P, *-S-A-P	PT-TW002-S-SM	TP-24-02
-03, -04	-S-LC-P, *-S-A-P, -S-P	PT-TW002-S-SM	TP-24-02
-07	-S-LC-P, *-S-A-P, -S-P	PT-TW002-S-SM	TP-24-02
-06	-D-LC	PT-TW001-D-SM	TP-03
-06	NONE, -A, -D	PT-TW001-D-SM	TP-03
-06	-D-A-P, -D-LC-P, -D-P, -D-LC-M, -D-A-M, -D-M	PT-TW001-D-SM	TP-03
-06	-S-LC-P, -S-A-P, -S-P	PT-TW002-S-SM	TP-24-02

PATENT NUMBERS
5713755 / 5961339



IN-PROCESS

TW-XX-XX-XXX-X-XXX-SM-XXX-XX

MATERIAL:
INSULATOR:
LIQUID CRYSTAL POLYMER
COLOR: BLACK
TERMINALS:
PHOSPHOR BRONZE

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY:
BRYANT 3-8-93

TW-XX-XX-XXX-X-XXX-SM-XXX-XX