

FS70KM-2

HIGH-SPEED SWITCHING USE


FS70KM-2



- 10V DRIVE
- V_{DS} 100V
- $r_{DS(ON)}$ (MAX) $20m\Omega$
- I_D 70A
- Integrated Fast Recovery Diode (TYP.) 120ns
- V_{iso} 2000V

OUTLINE DRAWING

Dimensions in mm

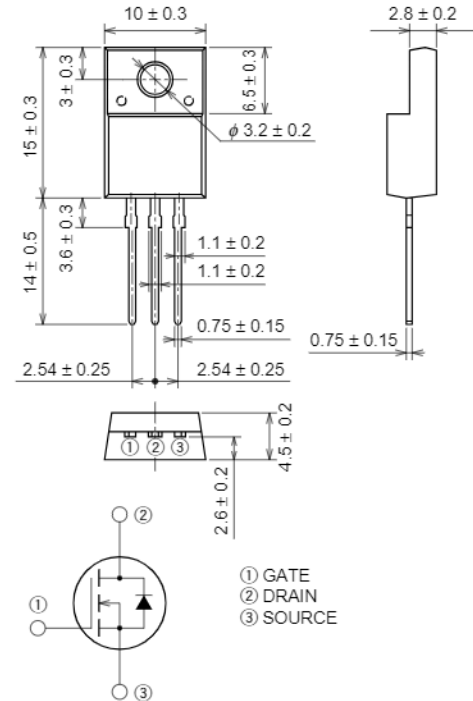

TO-220FN

APPLICATION

Motor control, Lamp control, Solenoid control
DC-DC converter, etc.





MAXIMUM RATINGS (Tc = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
V_{DS}	Drain-source voltage	$V_{GS} = 0V$	100	V
V_{GSS}	Gate-source voltage	$V_{DS} = 0V$	± 20	V
I_D	Drain current		70	A
I_{DM}	Drain current (Pulsed)		280	A
I_{DA}	Avalanche drain current (Pulsed)	$L = 100\mu H$	70	A
I_S	Source current		70	A
I_{SM}	Source current (Pulsed)		280	A
P_D	Maximum power dissipation		35	W
T_{ch}	Channel temperature		$-55 \sim +150$	°C
T_{stg}	Storage temperature		$-55 \sim +150$	°C
V_{iso}	Isolation voltage	AC for 1minute, Terminal to case	2000	V
—	Weight	Typical value	2.0	g


ELECTRICAL CHARACTERISTICS ($T_{ch} = 25^{\circ}\text{C}$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
$V_{(BR)DSS}$	Drain-source breakdown voltage	$I_D = 1\text{mA}$, $V_{GS} = 0\text{V}$	100	—	—	V
I_{GSS}	Gate-source leakage current	$V_{GS} = \pm 20\text{V}$, $V_{DS} = 0\text{V}$	—	—	± 0.1	μA
I_{DSS}	Drain-source leakage current	$V_{DS} = 100\text{V}$, $V_{GS} = 0\text{V}$	—	—	0.1	mA
$V_{GS(th)}$	Gate-source threshold voltage	$I_D = 1\text{mA}$, $V_{DS} = 10\text{V}$	2.0	3.0	4.0	V
$r_{DS(on)}$	Drain-source on-state resistance	$I_D = 35\text{A}$, $V_{GS} = 10\text{V}$	—	14	20	$\text{m}\Omega$
$V_{DS(on)}$	Drain-source on-state voltage	$I_D = 35\text{A}$, $V_{GS} = 10\text{V}$	—	0.49	0.7	V
y_{fs}	Forward transfer admittance	$I_D = 35\text{A}$, $V_{DS} = 10\text{V}$	—	53	—	S
C_{iss}	Input capacitance	$V_{DS} = 10\text{V}$, $V_{GS} = 0\text{V}$, $f = 1\text{MHz}$	—	6540	—	pF
C_{oss}	Output capacitance		—	1150	—	pF
C_{rss}	Reverse transfer capacitance		—	500	—	pF
$t_{d(on)}$	Turn-on delay time	$V_{DD} = 50\text{V}$, $I_D = 35\text{A}$, $V_{GS} = 10\text{V}$, $R_{GEN} = R_{GS} = 50\Omega$	—	95	—	ns
t_r	Rise time		—	175	—	ns
$t_{d(off)}$	Turn-off delay time		—	330	—	ns
t_f	Fall time		—	190	—	ns
V_{SD}	Source-drain voltage	$I_S = 35\text{A}$, $V_{GS} = 0\text{V}$	—	1.0	1.5	V
$R_{th(ch-c)}$	Thermal resistance	Channel to case	—	—	3.57	$^{\circ}\text{C/W}$
t_{rr}	Reverse recovery time	$I_S = 70\text{A}$, $di/dt = -100\text{A}/\mu\text{s}$	—	120	—	ns


PERFORMANCE CURVES

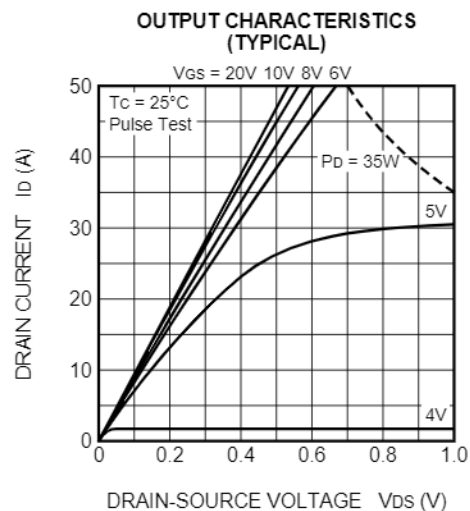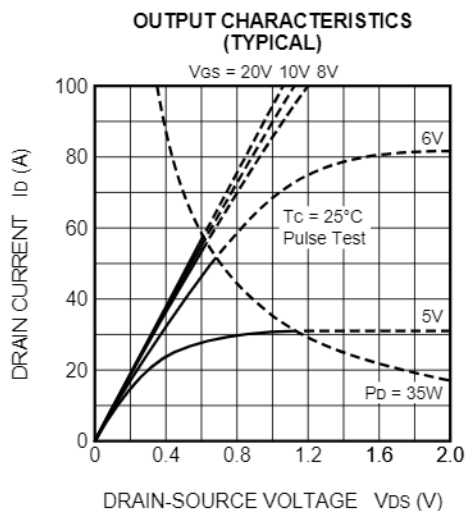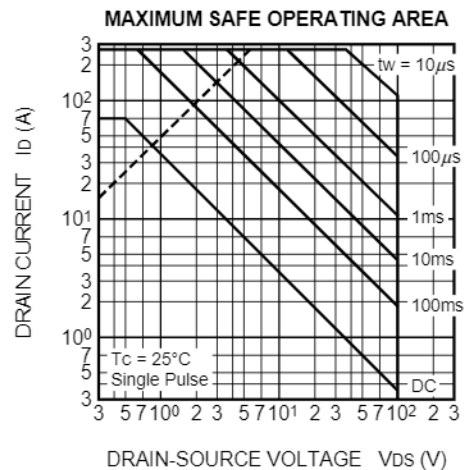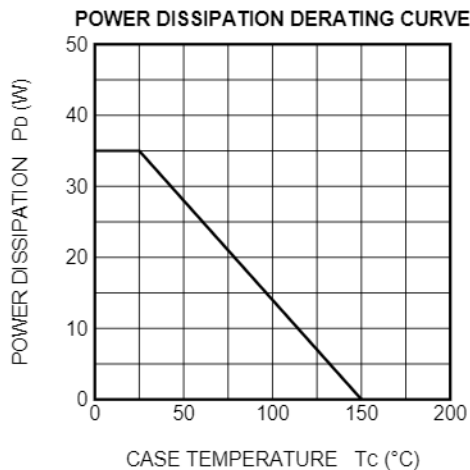


ON-STATE VOLTAGE VS.
GATE-SOURCE VOLTAGE
(TYPICAL)

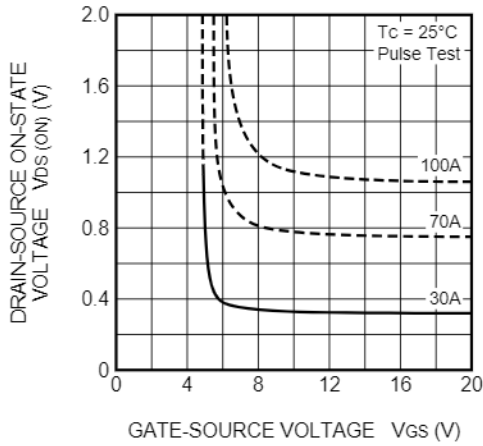


ON-STATE RESISTANCE VS.
DRAIN CURRENT
(TYPICAL)

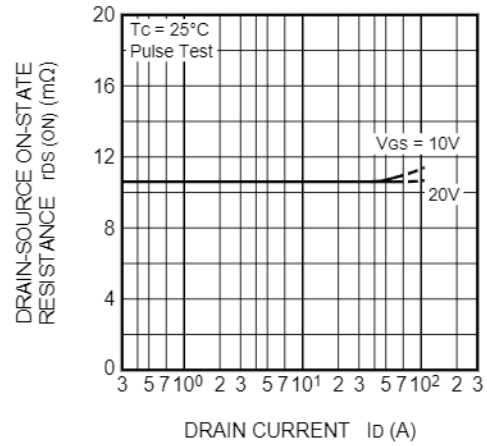


TRANSFER CHARACTERISTICS
(TYPICAL)

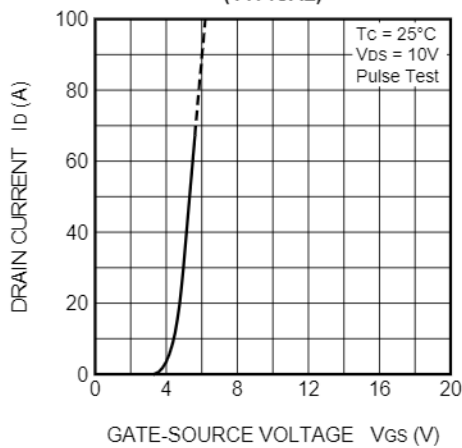


FORWARD TRANSFER ADMITTANCE
VS. DRAIN CURRENT
(TYPICAL)

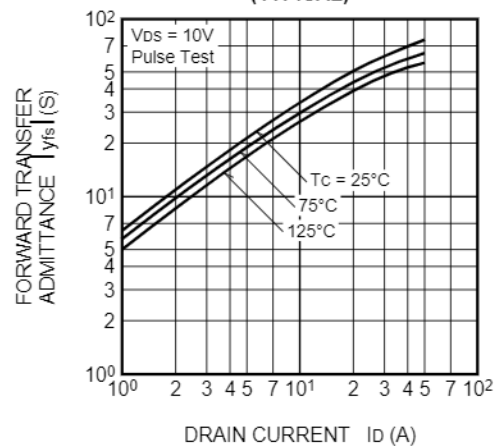


CAPACITANCE VS.
DRAIN-SOURCE VOLTAGE
(TYPICAL)

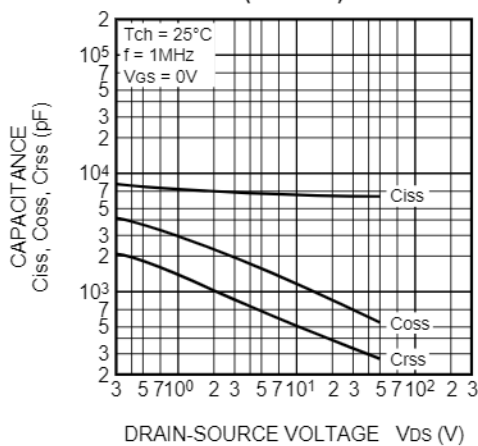


SWITCHING CHARACTERISTICS
(TYPICAL)

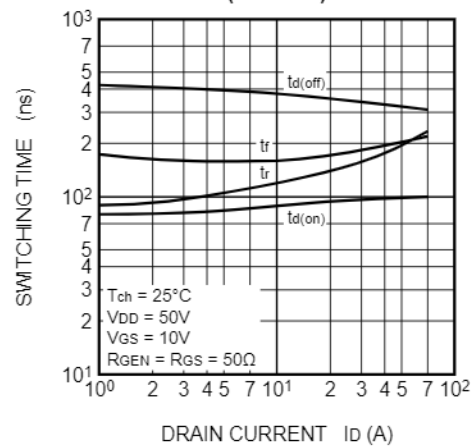


GATE-SOURCE VOLTAGE
VS. GATE CHARGE
(TYPICAL)

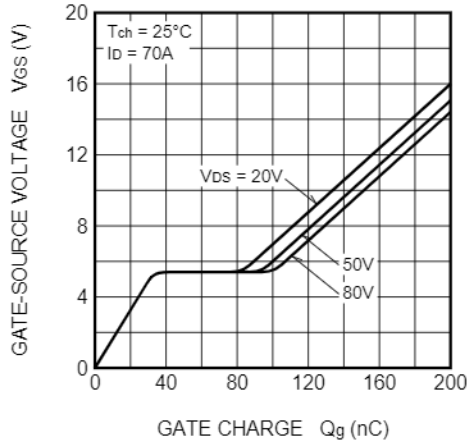


SOURCE-DRAIN DIODE
FORWARD CHARACTERISTICS
(TYPICAL)

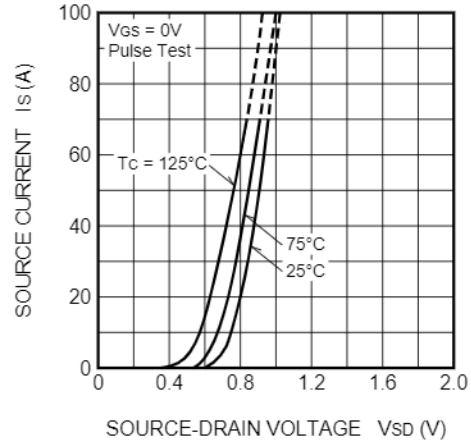


ON-STATE RESISTANCE VS.
CHANNEL TEMPERATURE
(TYPICAL)

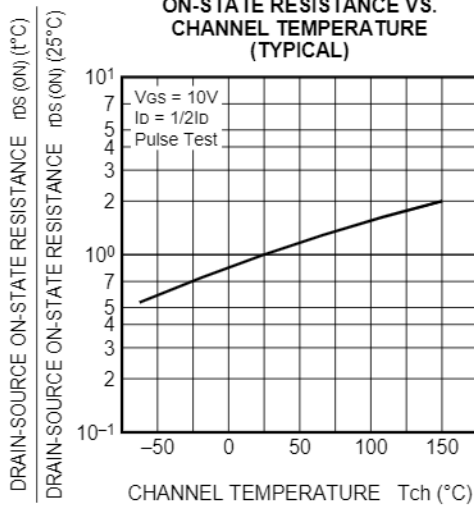

THRESHOLD VOLTAGE VS.
CHANNEL TEMPERATURE
(TYPICAL)

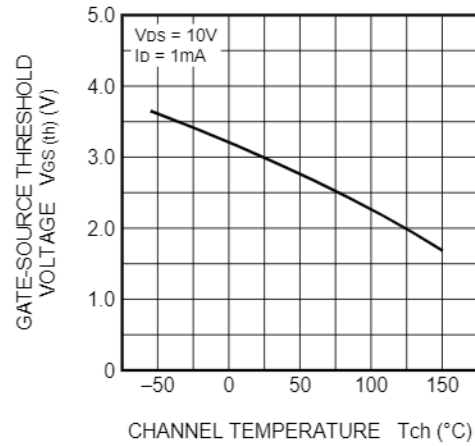

BREAKDOWN VOLTAGE VS.
CHANNEL TEMPERATURE
(TYPICAL)

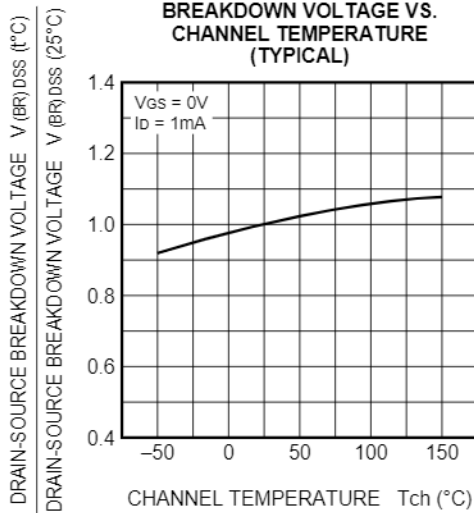

TRANSIENT THERMAL IMPEDANCE
CHARACTERISTICS

