

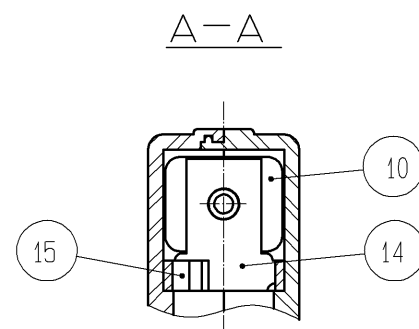


Oct.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

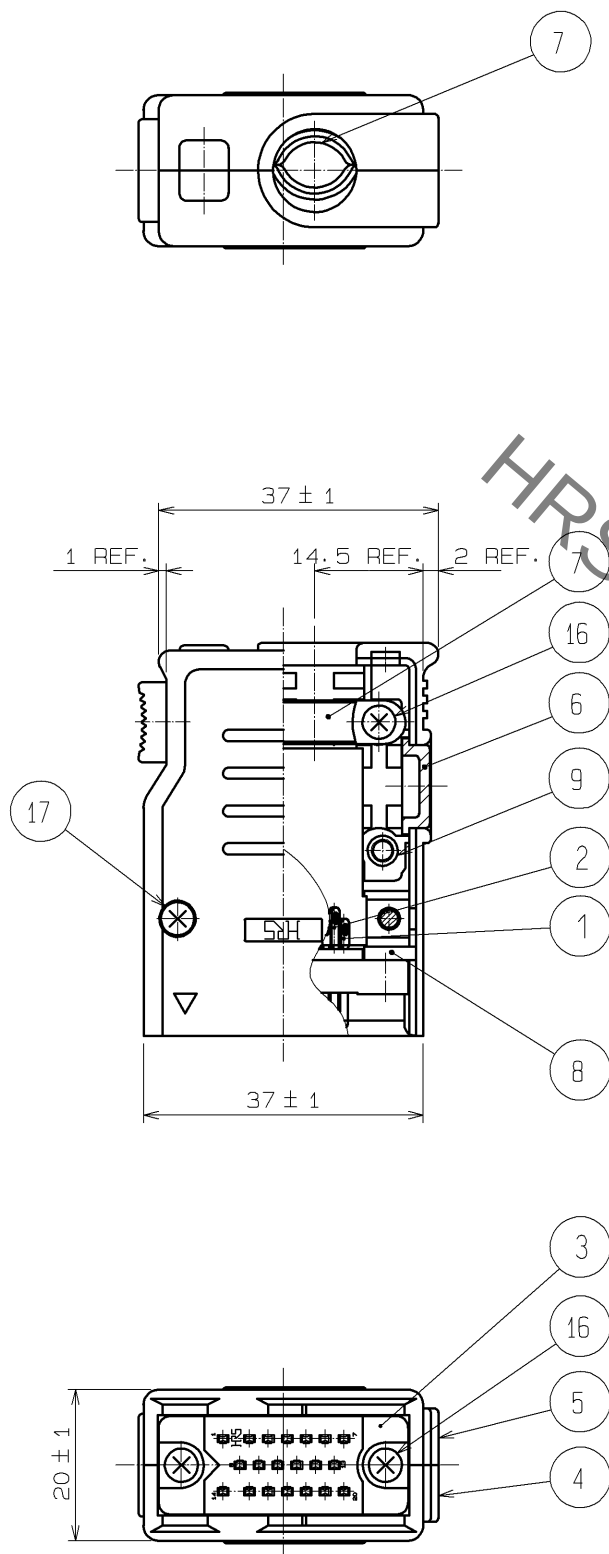

THE DIMENSION OF CABLE HOLE



9	BRASS	NICKEL PLATING 0.8μm min	18	STEEL	UNDER : COPPER PLATING 2μm min OVER : NICKEL PLATING 0.8μm min
8	STEEL	UNDER : COPPER PLATING 1μm min OVER : NICKEL PLATING 2μm min	17	STEEL	UNDER : COPPER PLATING 1μm min OVER : NICKEL PLATING 2μm min
7	STAINLESS STEEL		16	STEEL	UNDER : COPPER PLATING 1μm min OVER : NICKEL PLATING 2μm min
6	ABS	(BLACK)	15	STEEL	UNDER : COPPER PLATING 1μm min OVER : NICKEL PLATING 2μm min
5	ABS	(BLACK)	14	STEEL	UNDER : COPPER PLATING 1μm min OVER : NICKEL PLATING 2μm min
4	ABS	(BLACK)	13	STEEL	UNDER : COPPER PLATING 1μm min OVER : NICKEL PLATING 2μm min
3	DIALLYL PHTHALATE	(BLUE)	12	STAINLESS STEEL	
2	BRASS	SILVER PLATING 5μm min	11	ABS	(BLACK)
1	BRASS	SILVER PLATING 5μm min	10	ABS	(JIS Z 8721 5Y 7/0.5)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm					
SCALE 1 : 1		COUNT △		DESCRIPTION OF REVISIONS	
DESIGNED		CHECKED		DATE	
APPROVED : RI. TAKAYASU		12.12.28		DRAWING NO. EDC3-006593-01	
CHECKED : EJ. WAKATSUKI		12.12.28		PART NO. P-1620BA-CA(50)	
DESIGNED : YH. MAMADA		12.12.27		CODE NO. CL216-0247-5-50	
DRAWN : YH. MAMADA		12.12.27		△ 1/1	