PART NO. AND CH. CODE	△2 L_4	H_1	H_2	W_1	R_1	W_2	R_2	WIRE SIZE (mm²)
7116-4110-02, A	16.60	△1(2.45)	△1(3.55)	2.30	0.45	2.80	0.45	△4 0.3~0.6 OR EQUIVALENT
7116-4111-02, A	16.60	△1(3.25)	△1(4.45)	3.00	0.65	3.60	0.65	△4 0.75~1.25 OR EQUIVALENT
7116-4112-02, A	16.60	△3(4.00)	△1(5.50)	3.70	0.85	4.60	0.90	△5 1.5~3.0 OR EQUIVALENT
△2 7116-4113-02	18.50	(5.40)	(7.05)	4.90	1.10	6.50	1.50	3.0~5.0 OR EQUIVALENT

注 記

△2 1. 嵌合相手品番：7114-4110-02 ETC.

△3 2. 7116-4113-02においての通電電流値は、2.5 mm²電線相当以下とする。


△3 3. 7116-4113-02に5 mm²電線を圧着して使用する場合には、専用ハウジングが必要となります。


NOTES


△2 1. MATING PART NO. :7114-4110-02 ETC.


△3 2. CURRENT FOR 7116-4113-02 SHALL BE THE CURRENT FOR 2.5 mm² WIRE OR UNDER.

△3 3. IN CASE 5 mm² WIRE IS CRIMPED WITH THE TERMINAL 7116-4113-02, SPECIAL HOUSING IS REQUIRED.

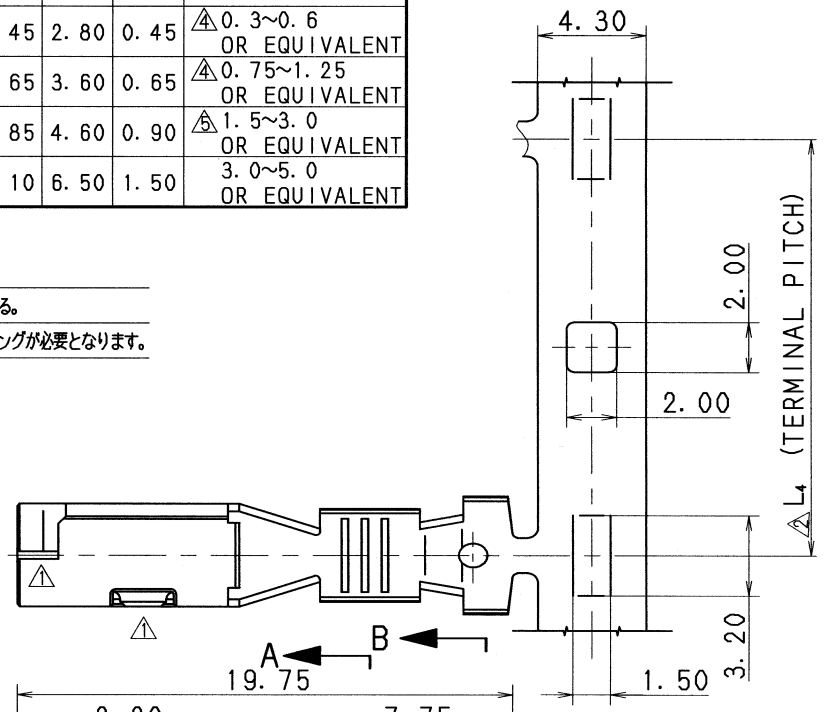


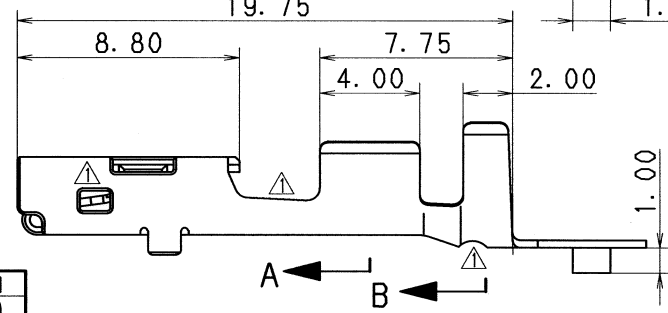






SEC. A-A



SEC. B-B

APPLICABLE WIRE SIZE MARK

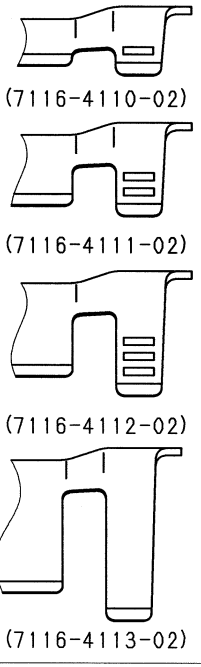

△5	07.06.04	CHANGED WIRE SIZE	C07-Z475	M.M
△4	03.07.10	CHANGED WIRE SIZE	C03-X452	K.O
△3	99.10.11	ADDED NOTE	C99-7134	T.S
△2	99.02.17	ADDED PART NO. ETC.	C99-L407	Y.U
△1	97.09.26	CHANGED FORM ETC., A	C97-N033	H.K
	95.07.25	NEW	C95-M194	Y.U
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED

MASS g

CUSTOMER

CUSTOMER PART NO. | CUSTOMER DWG NO.

OFFICE | TRIAL PART NO.

VENDOR

VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	95.07.25	mm	5/1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
杉山典	澤入	村松	Y.UCHIDA	M.ADRIANO
'07.06.05	'07.06.04	'07.06.04	95.05.31	07.06.04

MATL. SPEC. COPPER ALLOY t=0.3 (TIN PLATING) | TREAT. & FIN.

NAME △2 2.8 SYSTEM CONNECTOR

FEMALE TERMINAL

PART NO. CH. CODE 7116-4110-02 ETC.

DWG NO. 7116-4110-02:R | SET DWG NO.

YAZAKI CORPORATION

ISSUE MARK

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Yazaki:

7116411102 7116411002