

**6116202-3**

✓ ACTIVE

**CGS TE, OEG Miniature Relay PCF**

TE Internal #: 6116202-3

RJ45 Connector, Single Port, 1 x 1, Standard Connector Contact Density, Jack, Shielded, Cat 5, Inverted - Latch Up, OEG Miniature Relay PCF

[View on TE.com >](#)

Connectors &gt; Modular Jacks &amp; Plugs &gt; RJ45 Connectors

Modular Jack & Plug Interface Type: **RJ45**Port Configuration: **Single Port**Port Matrix Configuration: **1 x 1**Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**Connector Contact Density: **Standard**

## Features

### Product Type Features

Connector Product Type	Connector Assembly
Modular Jack & Plug Interface Type	RJ45
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Grounding Options	PCB Ground
Connector & Contact Terminates To	Printed Circuit Board

### Configuration Features

Number of PCB Ground Tabs	2
Port Configuration	Single Port
Port Matrix Configuration	1 x 1
Connector Contact Density	Standard
Number of Positions	8
Number of Loaded Positions	8
PCB Mount Orientation	Vertical

### Body Features

PCB Ground Tab Location	3.89 mm [.153 in]
Shield Plating Material	Tin
Shield Material	Copper Zinc Alloy

Modular Jack Latch Orientation

Inverted - Latch Up

Connector Profile

Standard

**Contact Features**

Contact Underplating Material

Nickel

PCB Contact Termination Area Plating Material

Tin

Contact Current Rating (Max)

1.5 A

Contact Mating Area Plating Material

Gold

Contact Base Material

Phosphor Bronze

Contact Mating Area Plating Material Thickness

1.27 µm[50 µin]

**Termination Features**

Termination Method to PCB

Through Hole - Press-Fit

Termination Post &amp; Tail Length

3.99 mm[.157 in]

**Mechanical Attachment**

Panel Mount Feature

With

PCB Mount Retention Type

Action/Compliant Tail

Connector Mounting Type

Board Mount, Panel Mount

**Housing Features**

Mating Entry Location

Top

Centerline (Pitch)

1.02 mm[.04 in]

Housing Color

Natural

Housing Material

Thermoplastic

**Dimensions**

PCB Thickness (Recommended)

1.57 mm[.062 in]

Connector Height

16.63 mm[.655 in]

**Usage Conditions**

Operating Temperature Range

-40 – 85 °C[-40 – 185 °F]

**Operation/Application**

Indicator Type

Not Illuminated

Shielded

Yes

Circuit Application

Signal

**Industry Standards**

UL Flammability Rating

UL 94V-0

Performance Category	Cat 5
----------------------	-------

### Packaging Features

Packaging Quantity	27
Packaging Method	Box & Tube, Tube

### Product Compliance


For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts

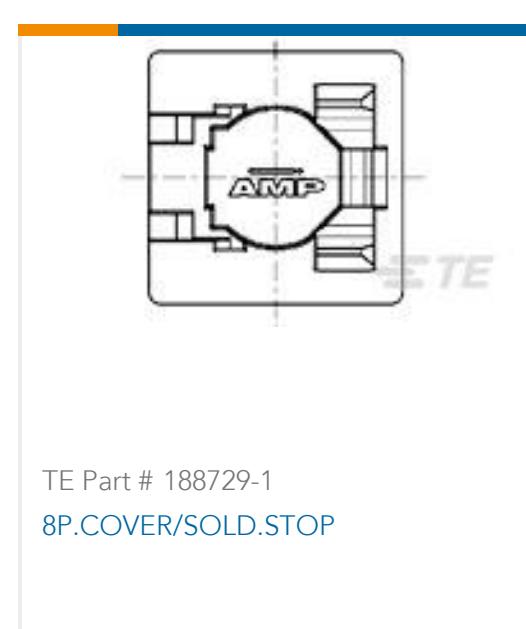


## Also in the Series | CGS TE

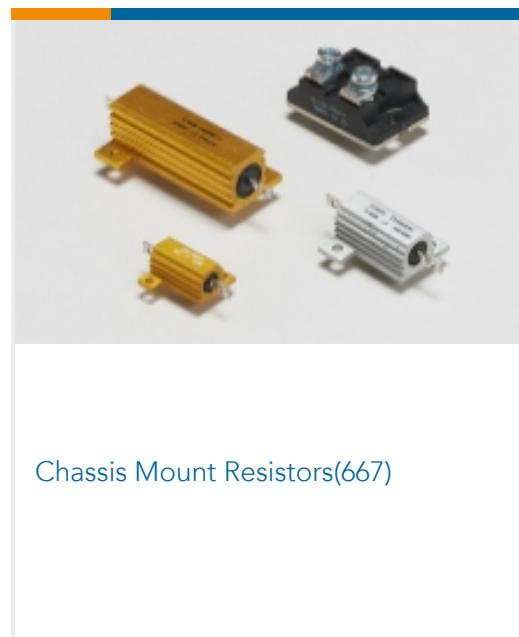

Chassis Mount Resistors(667)




RJ11 Connectors(1)

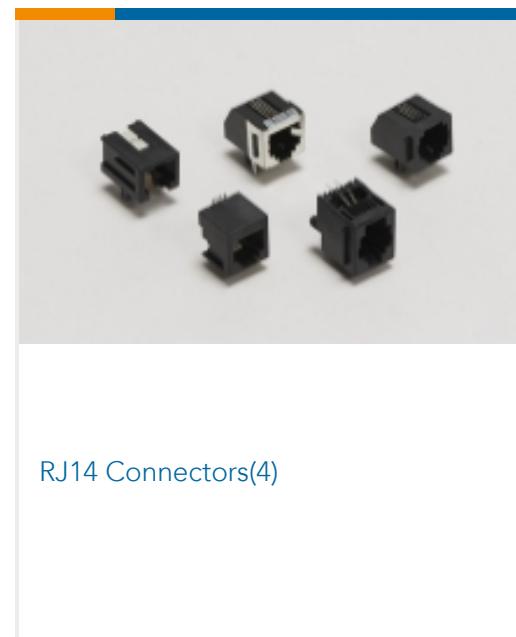


RJ14 Connectors(4)



RJ22 Connectors(5)

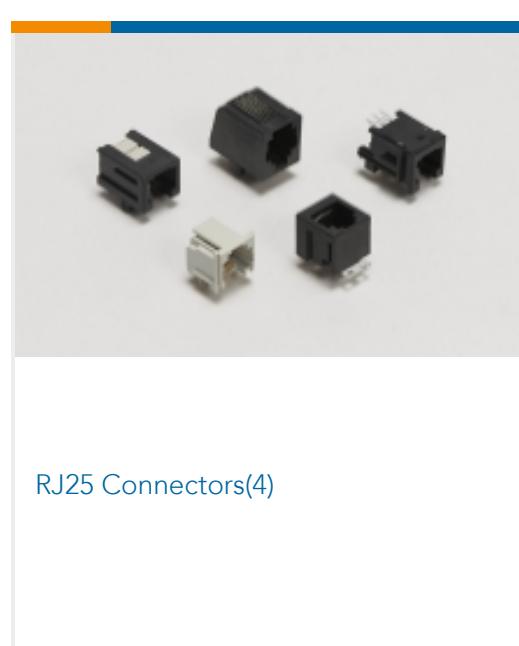


RJ25 Connectors(4)

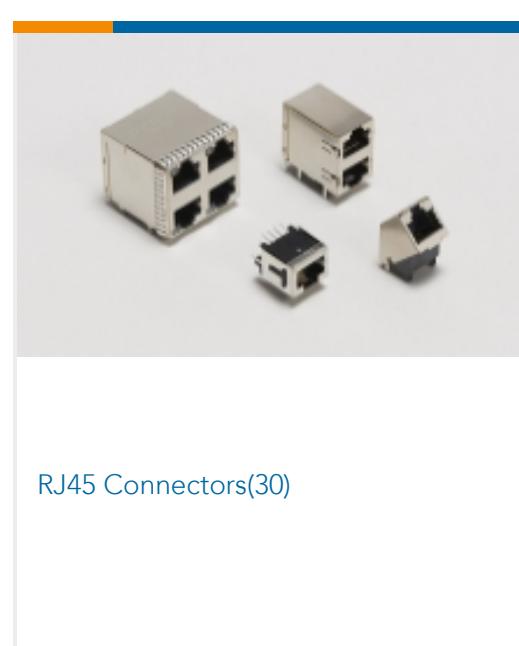


RJ45 Connectors(30)

## Also in the Series | OEG Miniature Relay PCF

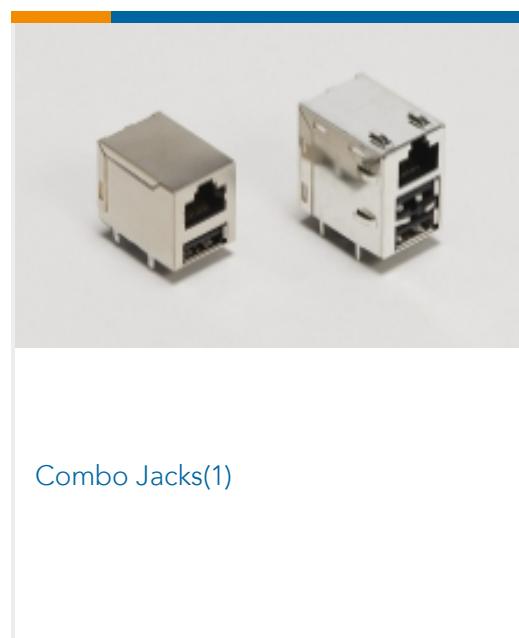


Combo Jacks(1)

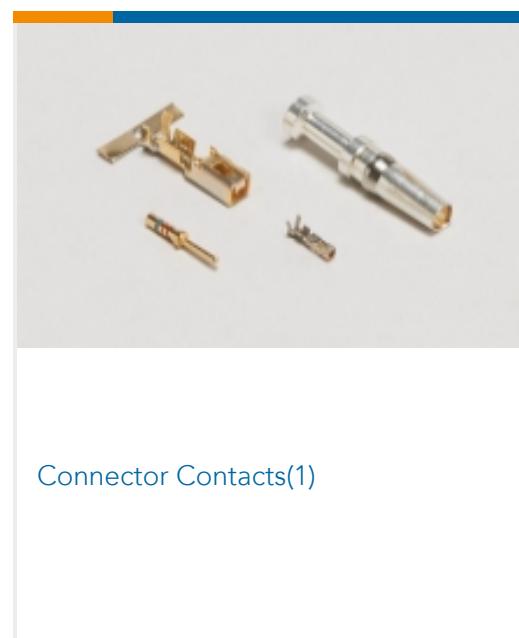


Connector Contacts(1)




IDC D-Sub Connectors(1)

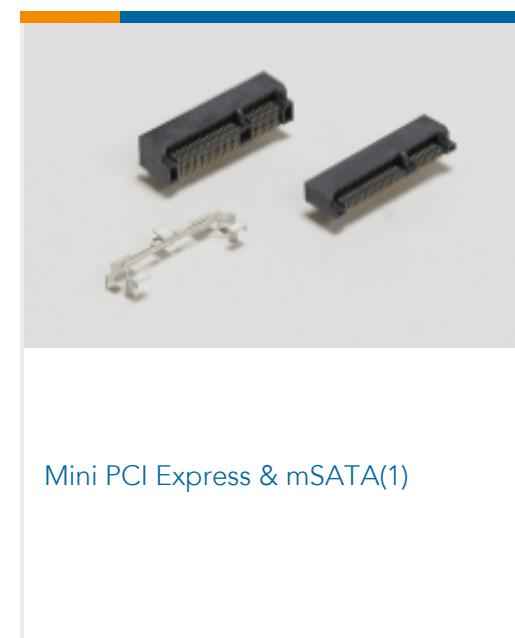


Mini PCI Express &amp; mSATA(1)

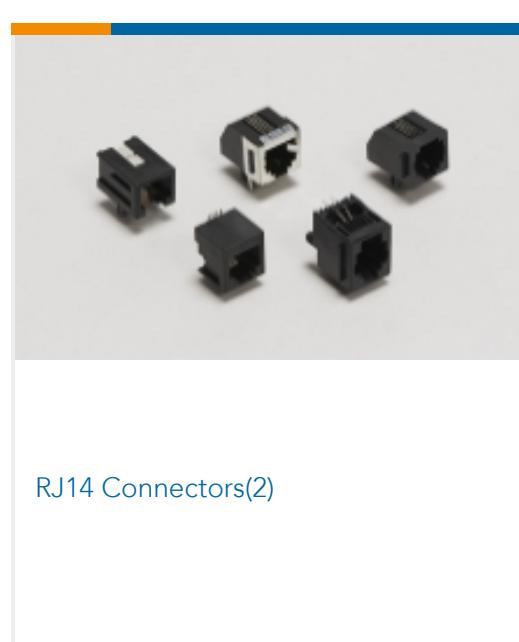


RJ14 Connectors(2)

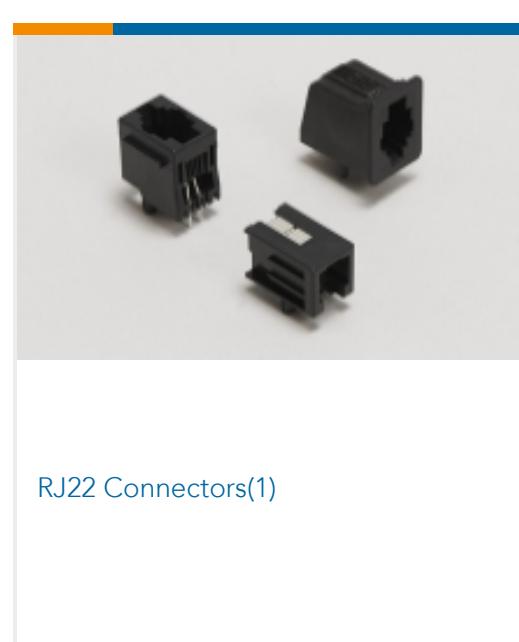

RJ22 Connectors(1)

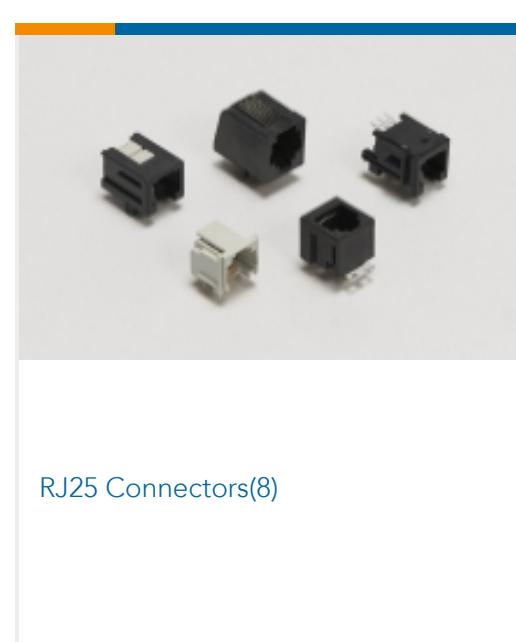

RJ25 Connectors(8)

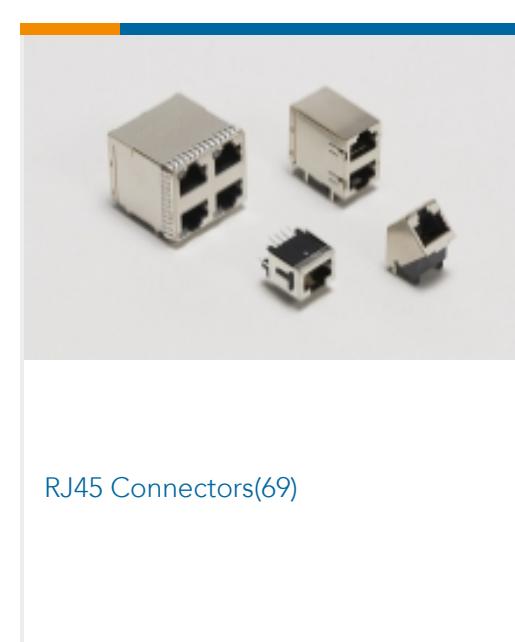

RJ45 Connectors(69)

## Customers Also Bought



## Documents

### CAD Files

[3D PDF](#)

[3D](#)

#### Customer View Model

[ENG\\_CVM\\_CVM\\_6116202-3\\_C\\_c-6116202-3-c.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_6116202-3\\_C\\_c-6116202-3-c.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_6116202-3\\_C\\_c-6116202-3-c.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

[Product Specification](#)

English