

CMS4612A

60V, 33mΩ typ., 5.5A N-Channel MOSFET and -60V, 67mΩ typ., -4A P-Channel MOSFET

General Description

The CMS4612 uses advanced trench technology MOSFETs to provide excellent RDS(ON) and low gate charge.

The complementary MOSFETs may be used in H-bridge, Inverters and other applications.

Features

- Low On-resistance
- Simple Drive Requirement
- Surface mount Package
- RoHS Compliant


Product Summary

	BVDSS	RDSON	ID
N-Channel	60V	40mΩ	5.5A
P-Channel	-60V	76mΩ	-4A

Applications

- DC/DC Converter
- Power Management

SOP-8 Pin Configuration

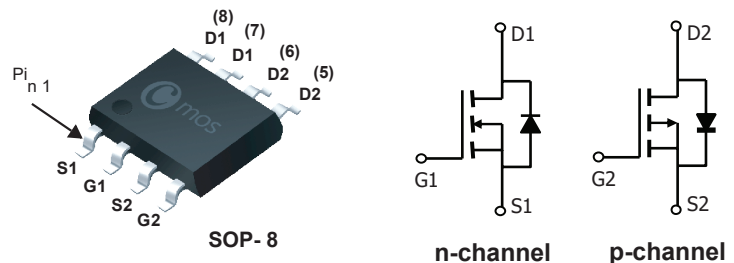

Type	Package	Marking
CMS4612A	SOP- 8	CMS4612A

Absolute Maximum Ratings

Symbol	Parameter	Max n-ch	Max p-ch	Units
V_{DS}	Drain-Source Voltage	60	-60	V
V_{GS}	Gate-Source Voltage	±20	±20	V
$I_D@T_A=25^{\circ}C$	Continuous Drain Current	5.5	-4	A
$I_D@T_A=100^{\circ}C$	Continuous Drain Current	3.8	-2.8	A
I_{DM}	Pulsed Drain Current	22	-20	A
EAS	Single Pulse Avalanche Energy ¹	30	42	mJ
$P_D@T_A=25^{\circ}C$	Total Power Dissipation	2	2	W
T_{STG}	Storage Temperature Range	-55 to 150	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	-55 to 150	°C

Thermal Characteristics: n-channel

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient	---	62.5	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-to-Case	---	33	°C/W

Thermal Characteristics: P-channel

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient	---	62.5	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-case	---	25	°C/W

N-channel Electrical Characteristics ($T_J=25^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	60	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10V$, $I_D=4.5A$	---	33	40	mΩ
		$V_{GS}=4.5V$, $I_D=3A$	---	40	48	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	1	---	3	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=60V$, $V_{GS}=0V$, $T_J=25^{\circ}\text{C}$	---	---	1	μA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	±100	nA
g_{fs}	Forward Transconductance	$V_{DS}=5V$, $I_D=4.5A$	---	11	---	S
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	1.5	---	Ω
Q_g	Total Gate Charge	$V_{DD}=48V$, $I_D=5.5A$ $V_{GS}=10V$	---	15	---	nC
Q_{gs}	Gate-Source Charge		---	2.2	---	
Q_{gd}	Gate-Drain Charge		---	4.3	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=48V$, $V_{GS}=10V$, $R_G=2.5\Omega$ $I_D=5.5A$	---	7	---	ns
T_r	Rise Time		---	13	---	
$T_{d(off)}$	Turn-Off Delay Time		---	18	---	
T_f	Fall Time		---	2.5	---	
C_{iss}	Input Capacitance	$V_{DS}=25V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	620	---	pF
C_{oss}	Output Capacitance		---	40	---	
C_{rss}	Reverse Transfer Capacitance		---	30	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Diode continuous forward current	$V_G=V_D=0V$, Force Current	---	---	5.5	A
$I_{S,pulse}$	Diode pulse current		---	---	22	A
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_F=1A$, $T_J=25^{\circ}\text{C}$	---	0.75	1.3	V

P-channel Electrical Characteristics ($T_J=25^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=-250\mu A$	-60	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=-10V$, $I_D=-3.2A$	---	67	76	mΩ
		$V_{GS}=-4.5V$, $I_D=-2.8A$	---	93	110	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=-250\mu A$	-1	---	-3	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=-48V$, $V_{GS}=0V$	---	---	-1	uA
		$V_{DS}=-48V$, $V_{GS}=0V$, $T_J=125^{\circ}\text{C}$	---	---	-10	
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=-5V$, $I_D=-3.2A$	---	8.5	---	S
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	12	---	Ω
Q_g	Total Gate Charge	$V_{DS}=-30V$, $V_{GS}=-10V$, $I_D=-3A$	---	19	---	nC
Q_{gs}	Gate-Source Charge		---	3.4	---	
Q_{gd}	Gate-Drain Charge		---	4.4	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-30V$, $V_{GS}=-10V$, $I_D=-3A$ $R_G=3\Omega$	---	5	---	ns
T_r	Rise Time		---	23	---	
$T_{d(off)}$	Turn-Off Delay Time		---	34	---	
T_f	Fall Time		---	42	---	
C_{iss}	Input Capacitance	$V_{DS}=-25V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	880	---	pF
C_{oss}	Output Capacitance		---	50	---	
C_{rss}	Reverse Transfer Capacitance		---	40	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	$V_G=V_D=0V$, Force Current	---	---	-4	A
I_{SM}	Pulsed Source Current		---	---	-20	A
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_F=-1A$, $T_J=25^{\circ}\text{C}$	---	-0.76	-1.2	V

Note:







1. The EAS data shows Max. rating . The N-Channel test condition is $V_{DD}=30V$, $V_{GS}=10V$, $L=0.5\text{mH}$, $I_{AS}=11A$.
The P-Channel test condition is $V_{DD}=-30V$, $V_{GS}=-10V$, $L=0.5\text{mH}$, $I_{AS}=-13A$.

This product has been designed and qualified for the consumer market.







Cmos assumes no liability for customers' product design or applications.

Cmos reserves the right to improve product design ,functions and reliability without notice.Please refer to the latest version of specification.

Typical Characteristics

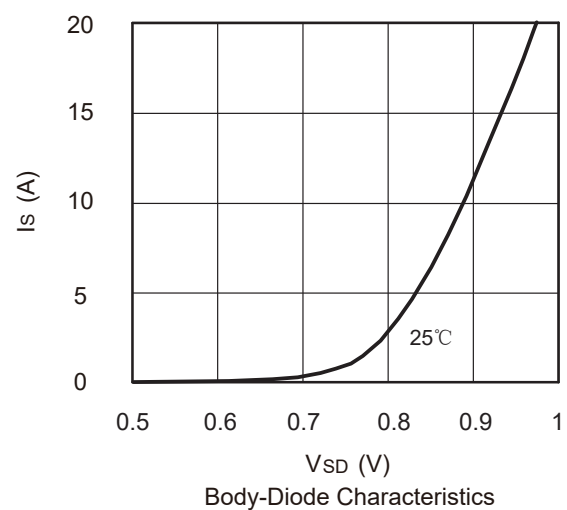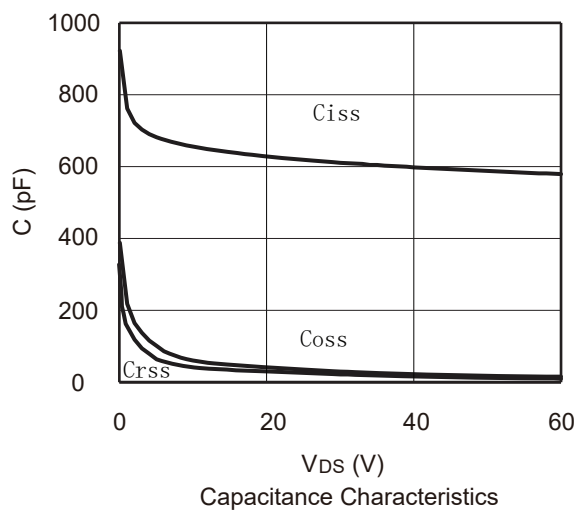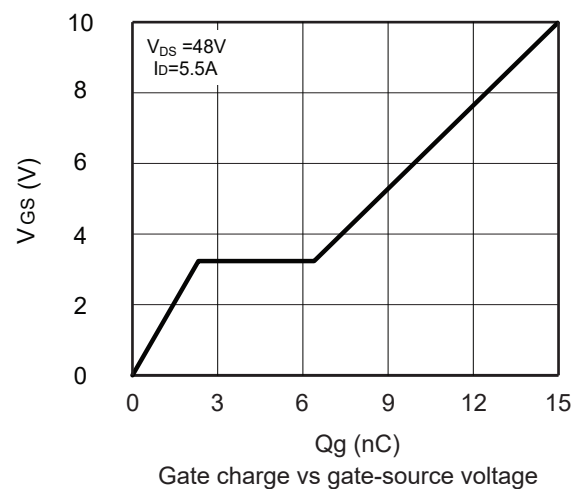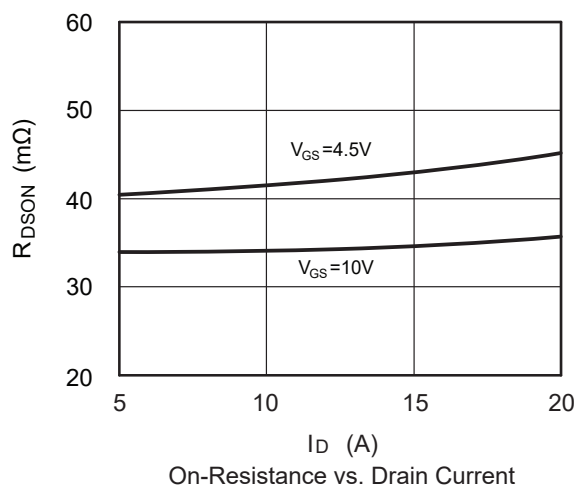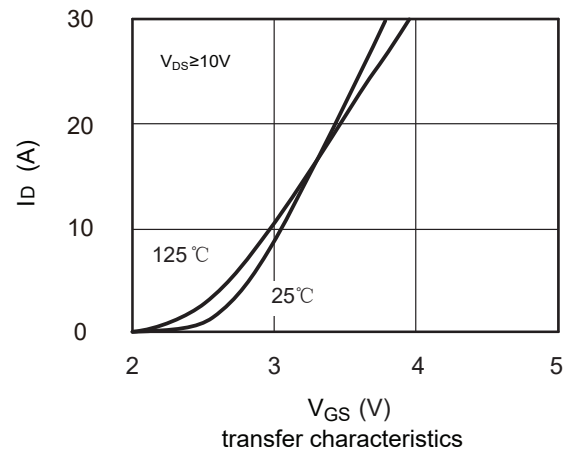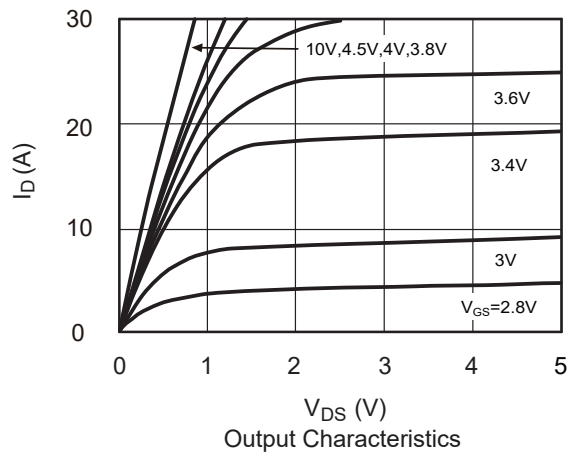

P-Channel: Typical Characteristics

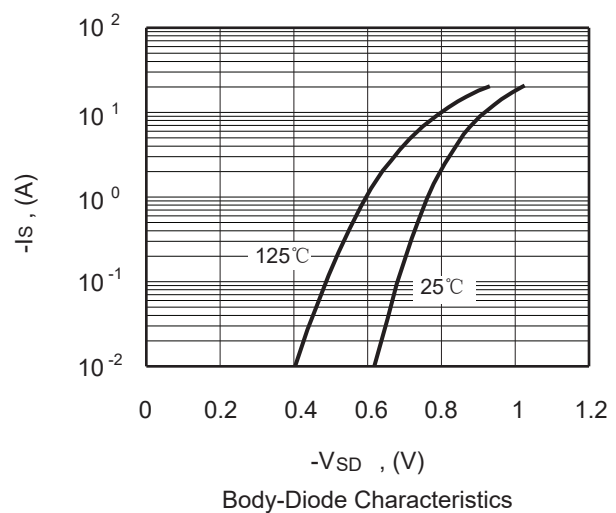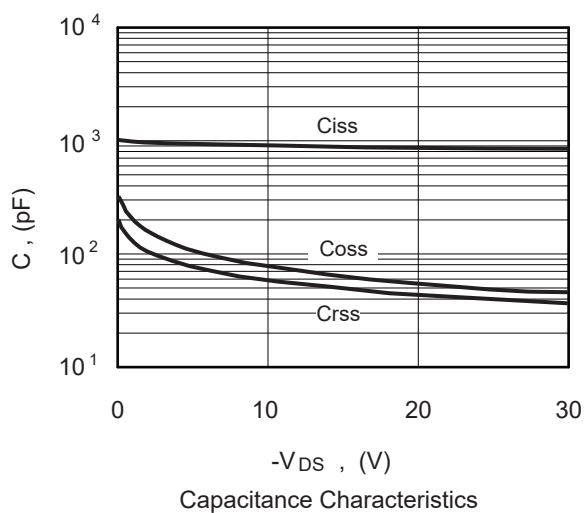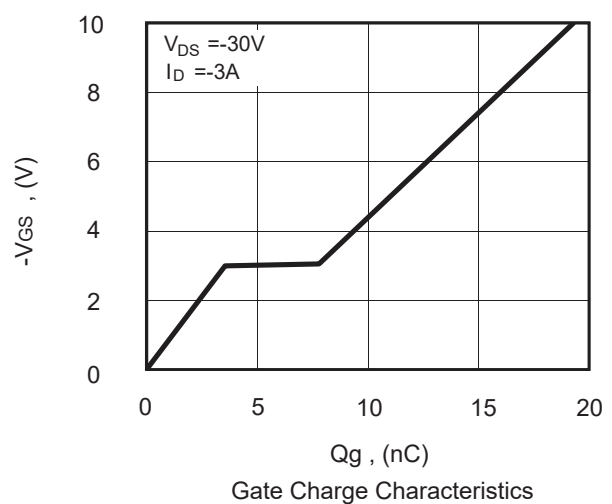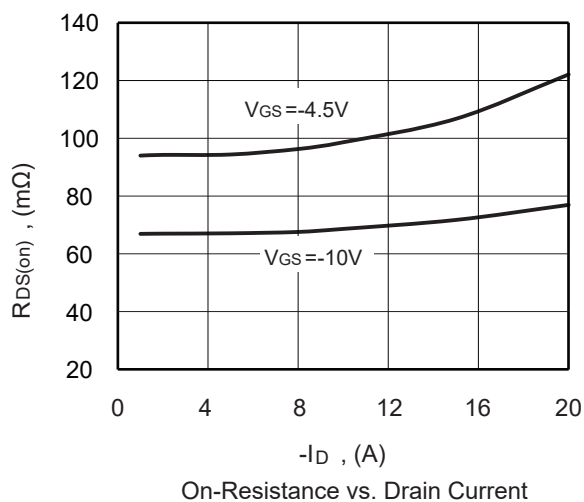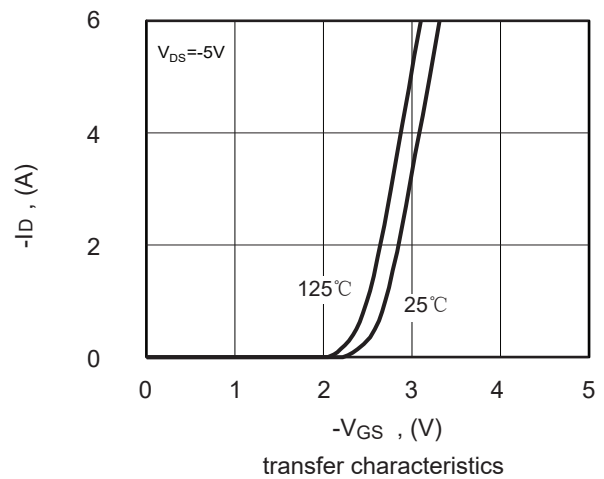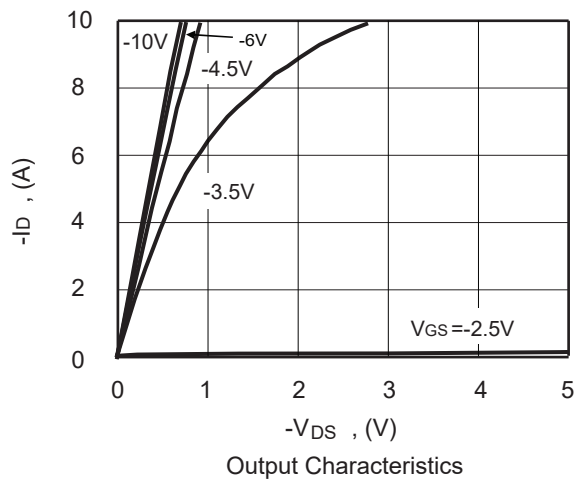


CMS4612A

60V, 33mΩ typ., 5.5A N-Channel MOSFET and -60V, 67mΩ typ., -4A P-Channel MOSFET

Package Dimension

SOP-8

Unit :mm

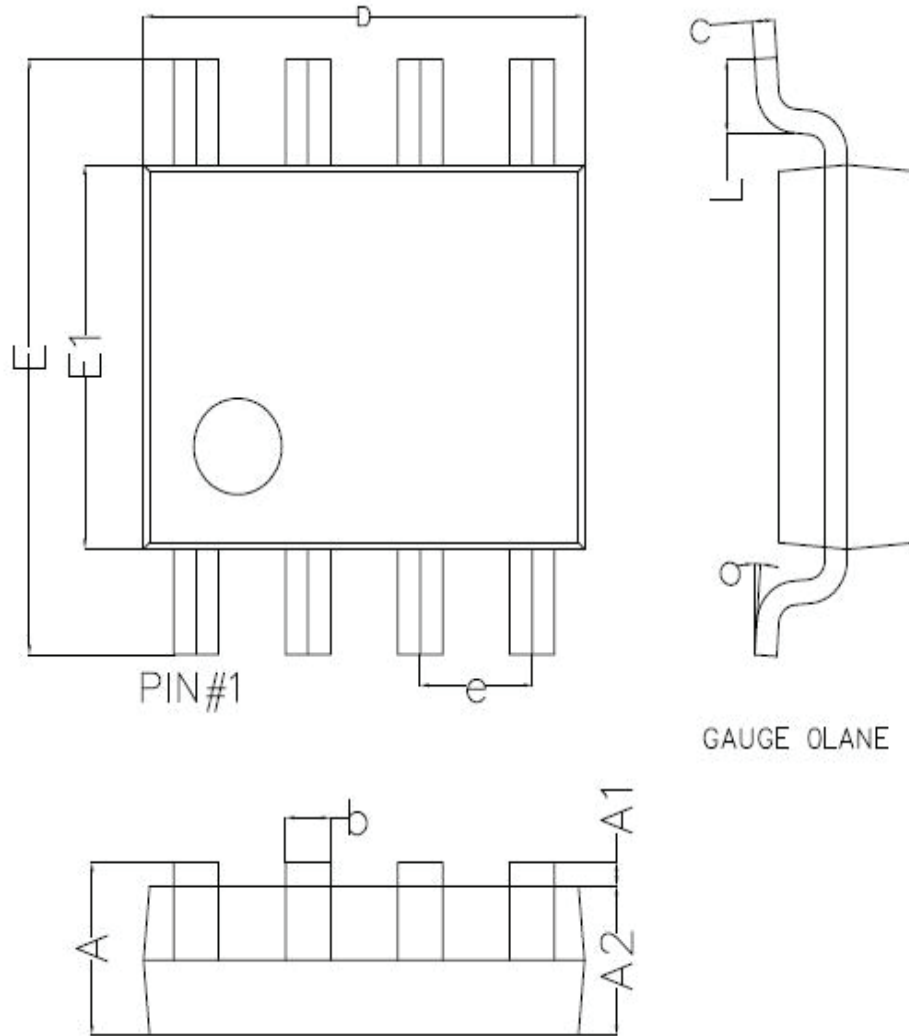

Symbol	Dim in mm		
	Min	Nor	Max
A	1.35	1.55	1.75
A1	0.02	0.065	0.10
A2	1.35	1.45	1.55
b	0.33	0.42	0.51
c	0.17	0.21	0.25
D	4.80	4.90	5.00
e	1.270 (BSC)		
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
L	0.4	0.835	1.27
θ	0°	4°	8°