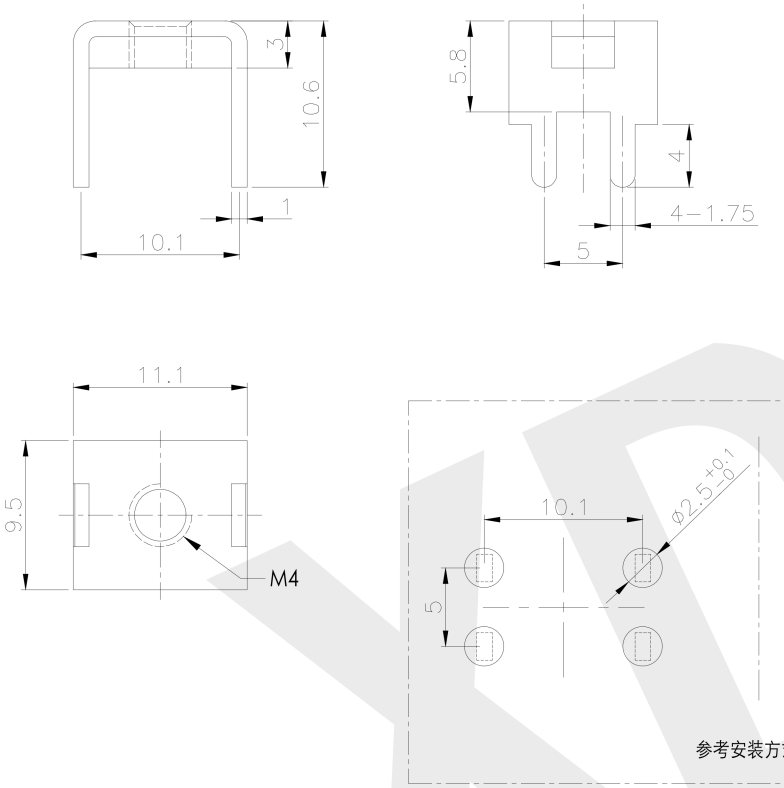

NOTES:
备注

1.Copper,nickel base,matte tin
黄铜H62，镍底，镀雾锡

2.Wire screw hole M4
压线螺孔M4

3.Current Rating: 60A
额定电流: 60A

4.Operating temperature: -40℃ ~ +125℃
工作温度：-40℃ ~ +125℃

5.There shall be no defects such as pin deformation and burrs.
不得有脚变形，毛刺等缺陷

6.Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

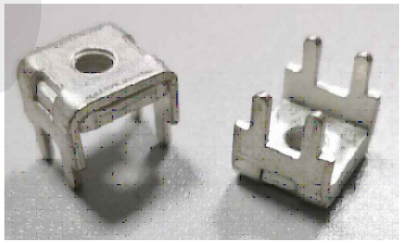

Ordering Information

XD - * * * * - **** - D *** * - 02

- Type: M=Pull Teeth (抽牙) / RN=Rivet Nut (铆螺母) / RG=Rivet Gasker (铆垫片)
- Screw Thread: 3=M3 (螺牙) / 4=M4 (螺牙) / 5=M5 (螺牙) / 6=M6 (螺牙) / 8=M8 (螺牙)
- Welding Feet (焊脚): 2=2个 / 4=4个 / 6=6个 / 8=8个 / .....
- T=Anti Twist (防止扭动)
- Series: 0808=8x8mm / 1014=10x14mm / .....
- D=DIP / S=SMT / FD=Flag Dip
- Product No. 产品序号
- Material: 默认=Copper (青铜) / RC=Red Copper (紫铜)

深圳讯答科技有限公司 4403030674221

			GENERL TOLERANCE	制 图 DRAWING	02	深圳讯答科技有限公司 ShenzhenXunDaTechnology Co.,Ltd			
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	PCB 焊接端子 (插板 铆垫片 M4 4焊脚 11.1x9.5x10.6mm)	版 本 REV.	A
			X.XX ±0.20	比 例 SCALE		产品料号 PART NO.	XD-RG44-1109-D060-02	单 位 UNITS	mm
1	初版发行		X.XXX ±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°						