






RoHs

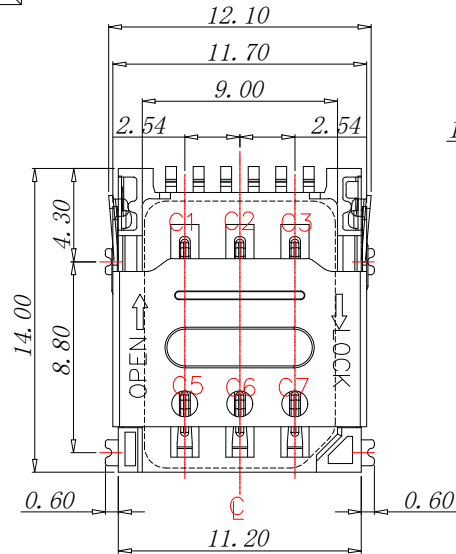




STEP 1 INSERT Micro-SIM CARD




STEP 2 PUSH THE SHELL



STEP 3 FINISH

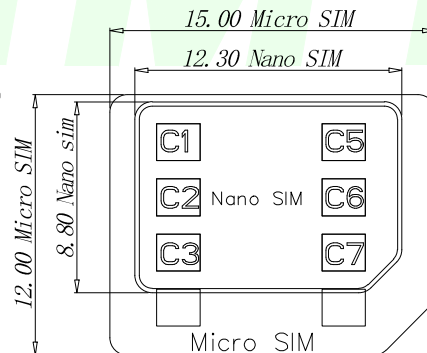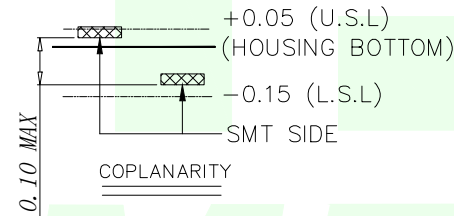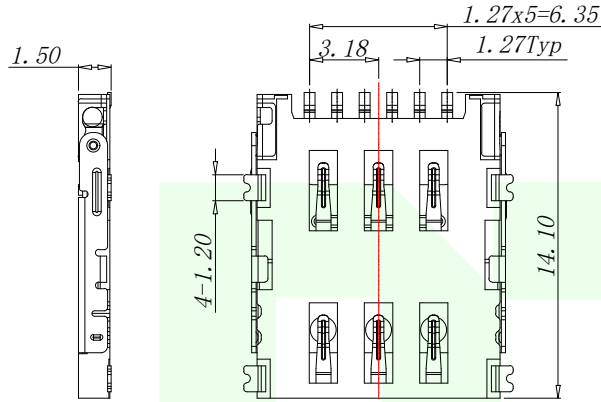

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

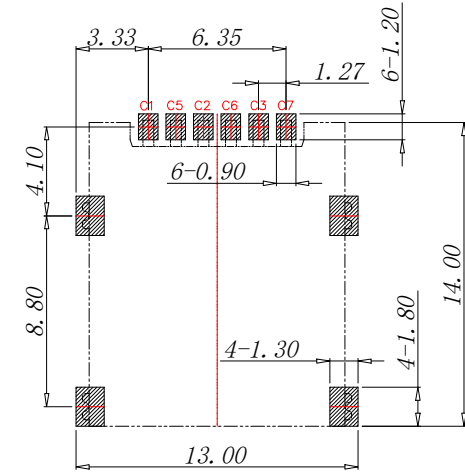


RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE: ± 0.05)

RECOMMENDED MATAL MASK T=0.12mm

- SMT SOLDER AREA
- NO PATTERN AND VIA HOLE IN HTIS AREA




PART INSTRUCTIONS:

PART NUMBER	DESCRIPTION
SIM30120-6P211-H15	6PIN
SIM30120-7P211-H15	6+1PIN

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 HMTconn Shenzhen Huamingtong Electronics Co., Ltd			
X.X ±0.30	X.° ±5°	PART NO. SIM30120-6P211-H15		TITLE: 1.5H 6PIN HINGE NANO SIM CARD CONNECTOR	
.XX ±0.20	X.X° ±1°				
.XXX ±0.10	X.XX°±0.5°	DESIGN: James	CUSTOMER	SIZE	UNITS
MANUFACTURE DWG		CHED: Talen		A4	MM
		APPD: Sophia		SCALE	SHEET
				N: A	1/2


RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

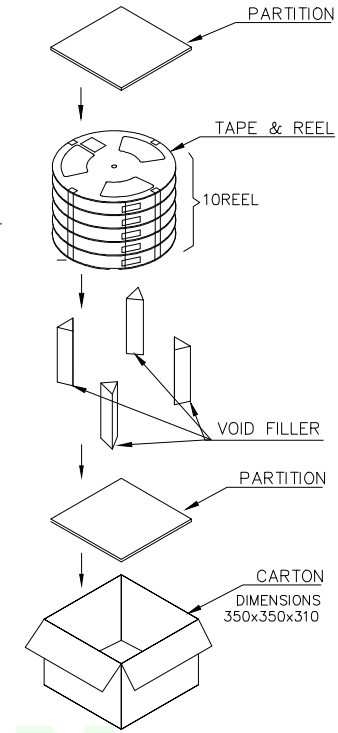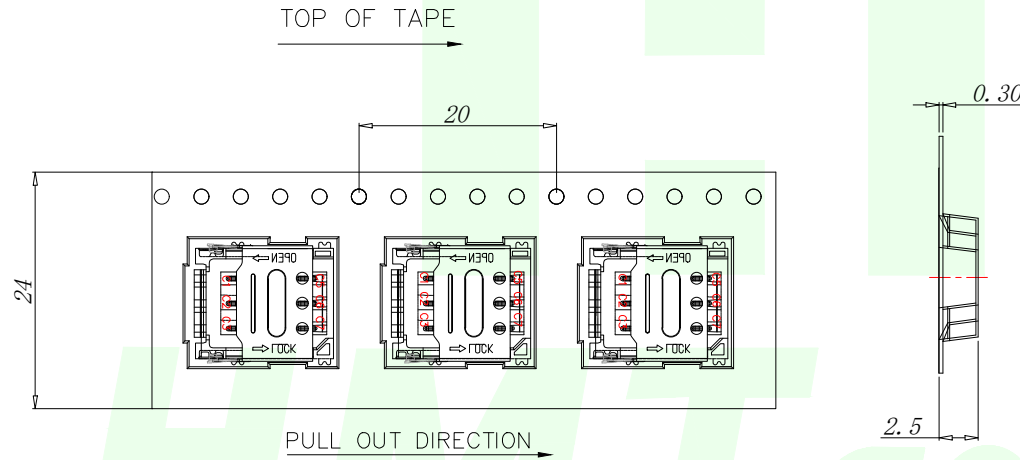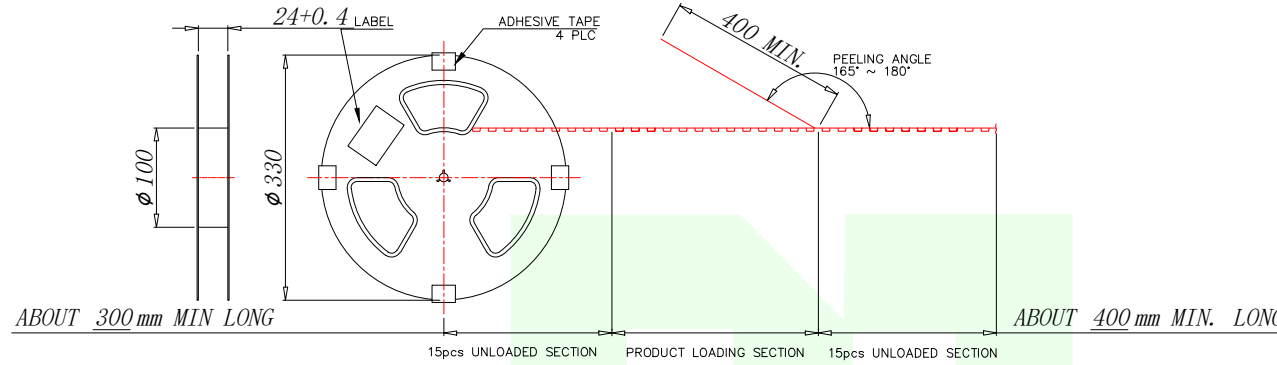

NOTES:

1. 15 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2 .
2. MATERIAL: CLARITY CONDUCTIVE POLYSTYRENE ALLOY 100% RECYCLABLE.
3. ALL DIMENSIONS MEET EIA-481-3 REQUIREMENTS.
4. THICKNESS: 0.30 ± 0.05 MM
5. COMPONENT LOAD PER 30.6M" REEL: 1500PCS.
6. 10REEL/CARTON: 15000pcs

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd			
X.X ±0.30	X.° ±5°	PART NO. SIM30120-6P211-H15		TITLE: 1.5H 6PIN HINGE NANO SIM CARD CONNECTOR	
.XX ±0.20	X.X° ±1°				
.XXX ±0.10	X.XX°±0.5°	DESIGN: James	CUSTOMER	SIZE	UNITS
MANUFACTURE DWG		CHED: Talen		A4	MM
		APPD: Sophia			SCALE N: A