


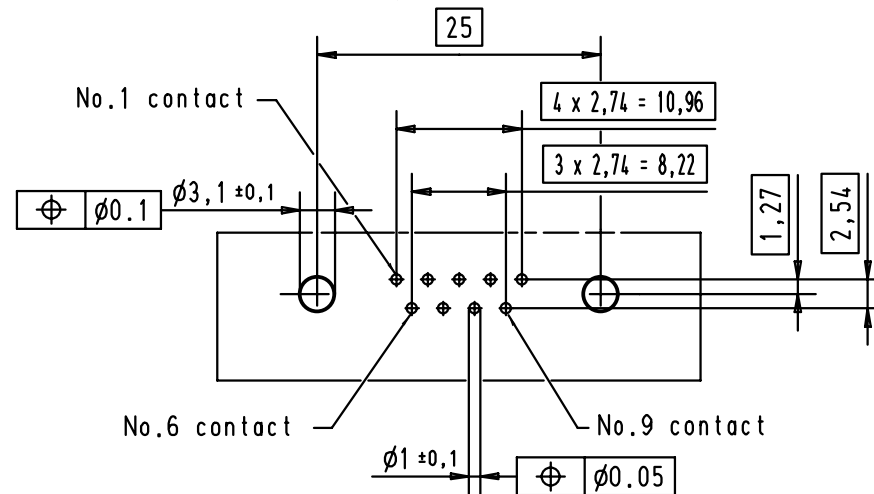

09 65 122 6801	M3	2					Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, standard angle, 09 poles, solder pin with nut, hole	Maßstab/ Scale 1.5:1
09 65 122 7801	M3	3				Detail.	11/dec/00	ALSPACE			
09 65 122 5801	M3	0.76 µm Au				Insp.					
09 65 122 6802	4-40 UNC	2	29773	18-APR-02	CV	Stand.					
09 65 122 7802	4-40 UNC	3	29689	02/07/01	AA	HARTING EURL F-95972 Paris				TB 0965122x80x	Blatt/ Page 2 /
09 65 122 5802	4-40 UNC	0.76 µm Au	27960	11/dec/00	ALSPACE						
Part number	Nut thread	Performance level	Mod.	Dat.	Name					Sub.	

09 65 122 6801
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 122 5802
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 122 5801
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats
2D files

Typenblatt

Typenblatt

09 65 122 6802
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 122 7801
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 122 7802
D-Sub - S PCB connector

Other applications

gender	male connector, right angled
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Row pitch	Row separation 2.54 mm
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF