

# GaN Amplifier 50 V, 500 W 2.7 - 3.1 GHz



**MACOM PURE CARBIDE™**

**CGHV31500F**

Rev. V1

## Features

- Saturated Power: 500 W
- Large Signal Gain: 12 dB
- Drain Efficiency: 65%
- Internally Matched: 50  $\Omega$
- High Temperature Operation
- RoHS\* Compliant

## Applications

- General Amplification
- S-Band RADAR

## Description

The CGHV31500F is a packaged amplifier fully matched to 50 ohms at both input and output ports. Utilizing the high performance, 0.4  $\mu$ m GaN on SiC production process, the CGHV31500F operates from 2.7 to 3.1 GHz and supports both defense and commercial related S-band radar applications.

Packaged in a thermally-enhanced, flange package, the CGHV31500F provides superior performance allowing customers to improve SWaP-C benchmarks in their next-generation systems

## Typical RF Performance:

Measured in Evaluation Test Fixture<sup>1</sup> at  $P_{IN} = 46$  dBm, 100  $\mu$ sec pulse width and 10% Duty Cycle.

- $V_{DS} = 50$  V,  $I_{DQ} = 500$  mA,  $T_C = 25^\circ$ C


Frequency (GHz)	Output Power <sup>1</sup> (dBm)	Power Gain <sup>1</sup> (dB)	$\eta_D$ <sup>1</sup> (%)
2.7	58.0	12.1	70
2.9	58.6	12.5	68
3.1	58.0	11.8	58

1. Performance values and curves in this data sheet were measured in this fixture.



440226

## Functional Schematic

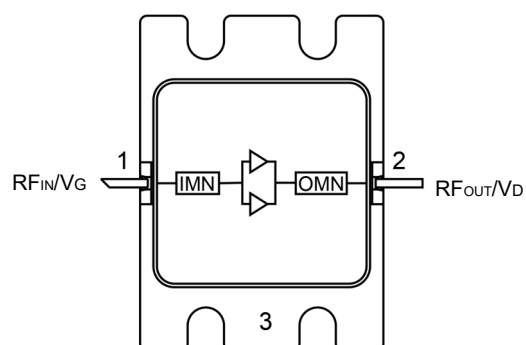

## Pin Configuration

Pin #	Pin Name	Function
1	RF <sub>IN</sub> / V <sub>G</sub>	RF Input / Gate
2	RF <sub>OUT</sub> / V <sub>D</sub>	RF Output / Drain
3	Flange <sup>2</sup>	Ground / Source

2. The flange on the package bottom must be connected to RF, DC and thermal ground.

## Ordering Information

Part Number	MOQ Increment
CGHV31500F	Bulk
CGHV31500F-AMP	Sample Board

\* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

# GaN Amplifier 50 V, 500 W 2.7 - 3.1 GHz



**MACOM PURE CARBIDE™**

**CGHV31500F**

Rev. V1

**RF Electrical Specifications:  $T_A = +25^\circ\text{C}$ ,  $V_{DS} = 50\text{ V}$ ,  $I_{DQ} = 500\text{ mA}$**

Parameter	Units	Min.	Typ.	Max.	Conditions
Output Power at $f = 2.7\text{ GHz}$	W	473	630	—	$V_{dd} = 50\text{ V}$ , $I_{dq} = 500\text{ mA}$ , $P_{in} = 46\text{ dBm}$ Pulse Width = 100 $\mu\text{s}$ , Duty Cycle = 10%
Output Power at $f = 2.9\text{ GHz}$	W	555	725	—	
Output Power at $f = 3.1\text{ GHz}$	W	473	630	—	
Power Gain at $f = 2.7\text{ GHz}$	dB	—	12.1	—	
Power Gain at $f = 2.9\text{ GHz}$	dB	—	12.5	—	
Power Gain at $f = 3.1\text{ GHz}$	dB	—	11.8	—	
Drain Efficiency at $f = 2.7\text{ GHz}$	%	57	68	—	
Drain Efficiency at $f = 2.9\text{ GHz}$	%	54	67	—	
Drain Efficiency at $f = 3.1\text{ GHz}$	%	50	62	—	
Small-Signal Gain (S21)	dB	11.25	14.5	—	$V_{dd} = 50\text{ V}$ , $I_{dq} = 500\text{ mA}$ , $P_{in} = -10\text{ dBm}$
Input Return Loss (S11)	dB	—	-15	-5.25	
Output Return Loss (S22)	dB	—	-5	-3	
Ruggedness: Output Mismatch	$\Psi$	—	—	5:1	No damage at all phase angles, $V_{dd} = 50\text{ V}$ , $I_{dq} = 500\text{ mA}$ , $P_{in} = 46\text{ dBm}$ Pulse width = 100 $\mu\text{s}$ , Duty Cycle = 10%

Note: Final testing and screening for all amplifier sales is performed using the CGHV31500F-AMP

## DC Electrical Characteristics $T_A = 25^\circ\text{C}$

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Units
Drain-Source Leakage Current	$V_{GS} = -8\text{ V}$ , $V_{DS} = 150\text{ V}$	$I_{DLK}$	-	-	33.4	mA
Gate-Source Leakage Current	$V_{GS} = -8\text{ V}$ , $V_{DS} = 10\text{ V}$	$I_{GLK}$	-11.6	-	-	mA
Gate Threshold Voltage	$V_{DS} = 10\text{ V}$ , $I_D = 83.6\text{ mA}$	$V_T$	-3.8	-3.0	-2.3	V
Gate Quiescent Voltage	$V_{DS} = 50\text{ V}$ , $I_D = 500\text{ mA}$	$V_{GSQ}$	-	-2.7	-	V

## Absolute Maximum Ratings<sup>1,2</sup>

Parameter	Absolute Maximum
Pulse Width	500 µsec
Duty Cycle	10 %
Drain-Source Voltage	150 V
Gate Voltage	-10, +2 V
DC Drain Current	8.4 A
Gate Current	80 mA
Input Power	48 dBm
Storage Temperature	-65°C to +150°C
Mounting Temperature <sup>3</sup>	+245°C
Junction Temperature <sup>4,5</sup>	+225°C
Operating Temperature	-40°C to +125°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. MACOM does not recommend sustained operation near these survivability limits.
3. Mounting temperature for 30 seconds.
4. Operating at nominal conditions with  $T_J \leq +225^\circ\text{C}$  will ensure  $\text{MTTF} > 1 \times 10^6$  hours.
5. Junction Temperature ( $T_J$ ) =  $T_C + \Theta_{jc} * (V * I)$   
Typical thermal resistance ( $\Theta_{jc}$ ) = 0.22 °C/W for CW.  
a) For  $T_C = +85^\circ\text{C}$ ,  
 $T_J = 168^\circ\text{C} @ P_{\text{diss}} = 376 \text{ W}$


## Handling Procedures

Please observe the following precautions to avoid damage:

## Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

## Evaluation Test Fixture and Recommended Tuning Solution, 2.7 - 3.1 GHz

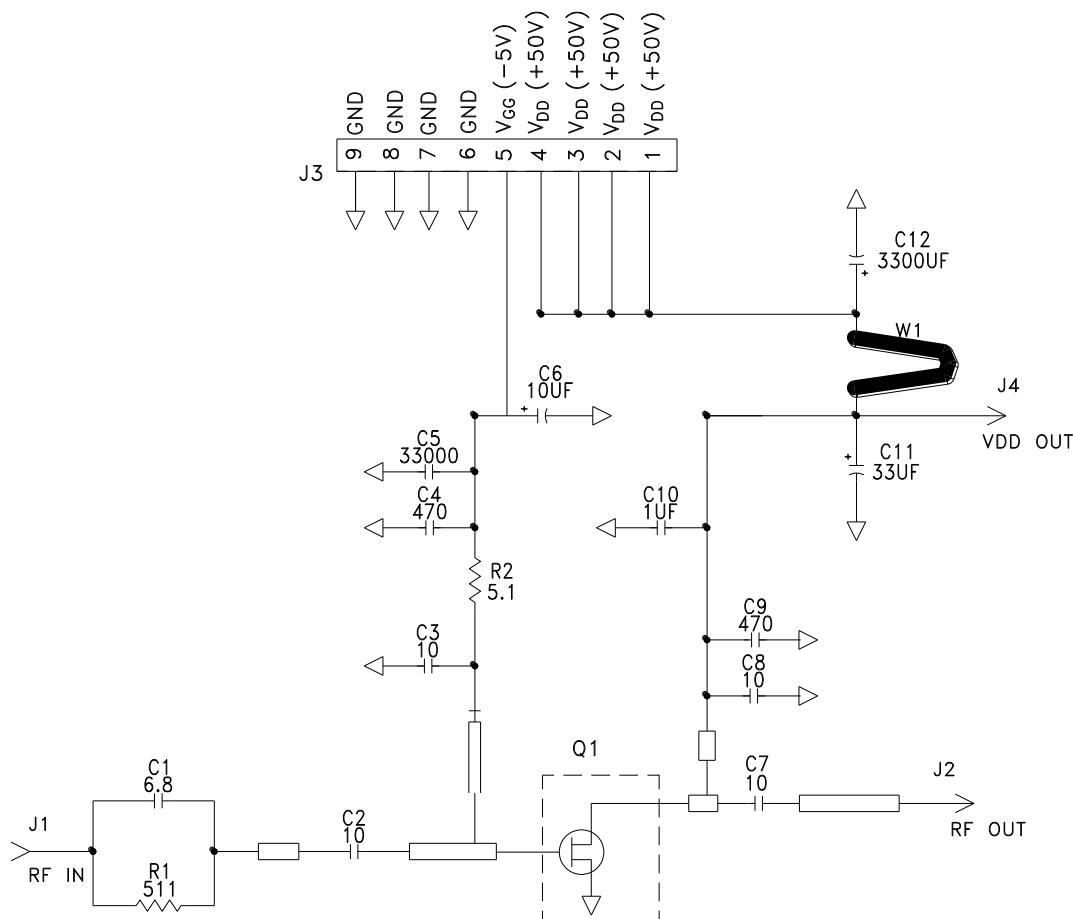

### Description

Parts measured on evaluation board (30-mil thick RF35). Matching is provided using a combination of lumped elements and transmission lines as shown in the simplified schematic above. Recommended tuning solution component placement, transmission lines, and details are shown on the next page.

### Biasing Sequence


#### Bias ON

1. Ensure RF is turned off
2. Apply pinch-off voltage of -5 V to the gate
3. Apply nominal drain voltage
4. Bias gate to desired quiescent drain current
5. Apply RF

#### Bias OFF

1. Turn RF off
2. Apply pinch-off voltage of -5 V to the gate
3. Turn-off drain voltage
4. Turn-off gate voltage

**Evaluation Test Fixture and Recommended Tuning Solution, 2.7—3.1 GHz**

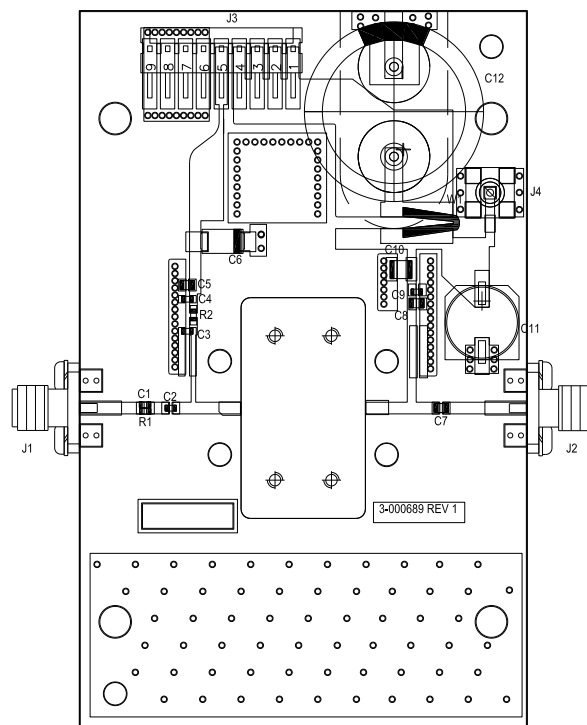

**Assembly Parts List**


Reference Designator	Description	Qty
R1	RES, 511, OHM, +/- 1%, 1/16W, 0603	1
R2	RES, 5.1, OHM, +/- 1%, 1/16W, 0603	1
C1	CAP, 6.8pF, +/-0.25%, 250V, 0603	1
C2, C7, C8	CAP, 10.0pF, +/-1%, 250V, 0805	3
C3	CAP, 10.0pF, +/-5%, 250V, 0603	1
C4, C9	CAP, 470pF, 5%, 100V, 0603, X	2
C5	CAP, 33000 pF, 0805, 100V, X7R	1
C6	CAP, 10uF 16V TANTALUM	1
C10	CAP, 1.0uF, 100V, 10%, X7R, 1210	1
C11	CAP, 33uF, 20%, G CASE	1
C12	CAP, 3300uF, +/-20%, 100V, ELECTROLYTIC	1
J1, J2	CONN, SMA, PANEL MOUNT JACK, FL	2
J3	HEADER, RT>PLZ, 0.1CEN LK 9POS	1
J4	CONNECTOR; SMB, Straight, JACK, SMD	1
W1	CABLE, 18 AWG, 4.2	1
—	PCB, RF35, 2.5 X 4.0 X 0.030	1
Q1	CGHV31500F	1

#### Typical Performance Curves as Measured in the 2.7– 3.1 GHz Evaluation Test Fixture


Pulse width = 100  $\mu$ s, Duty Cycle = 10%,  $P_{IN}$  = 46 dBm,  $V_{DS}$  = 50V,  $I_{DQ}$  = 500 mA (Unless otherwise noted)

For Engineering Evaluation Only – This data does not Modify MACOM's Datasheet Limits.


**S11, S21, & S22 vs. Frequency**

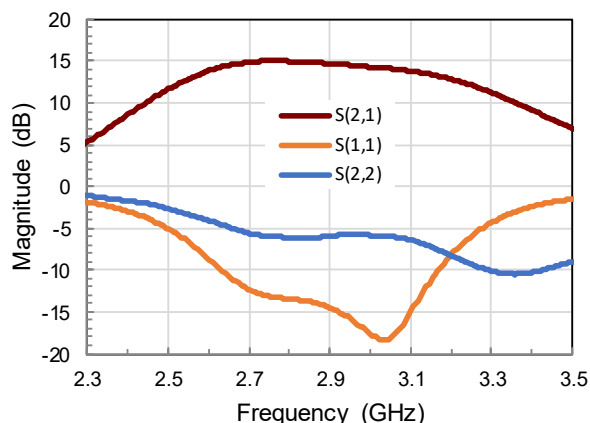


**Output Power, Gain, Drain Efficiency vs. Frequency**

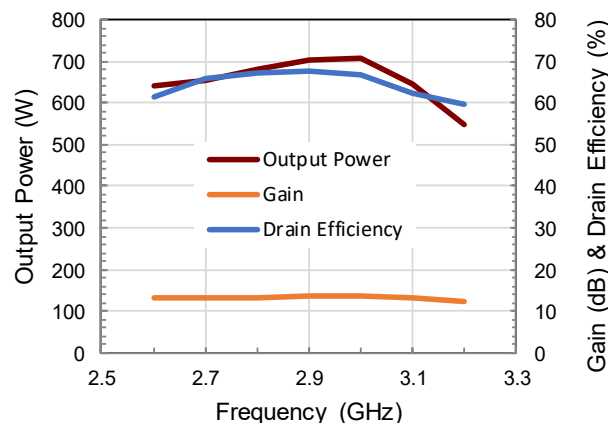


**Output Power vs. Input Power and Frequency**

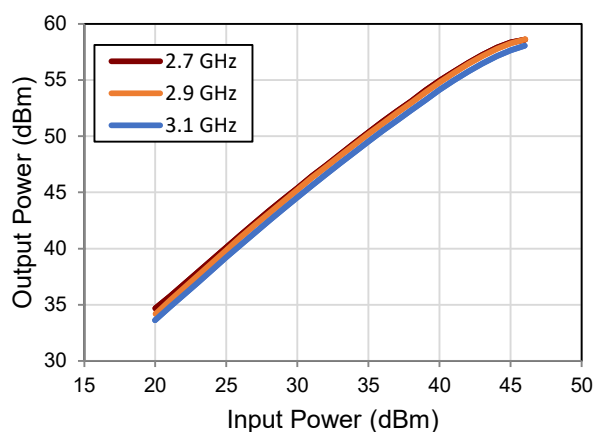

**Drain Efficiency vs. Input Power and Frequency**

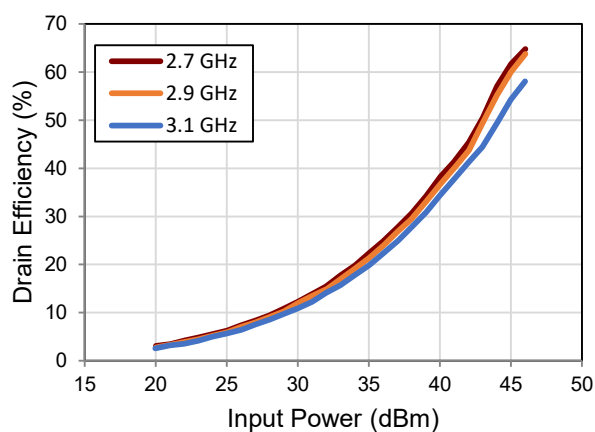

**Power Gain vs. Input Power and Frequency**

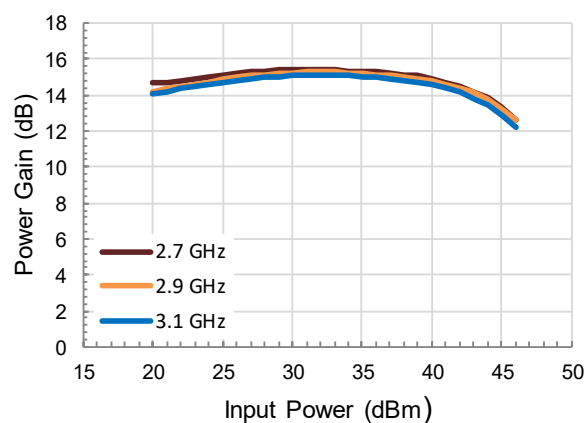

# GaN Amplifier 50 V, 500 W 2.7 - 3.1 GHz



**MACOM PURE CARBIDE™**


**CGHV31500F**

Rev. V1

## Lead-free 440226 Package Dimensions

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. INTERPRET DRAWING IN ACCORDANCE WITH ANSI Y14.5M-2009
2. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF .020 BEYOND EDGE OF LID
3. LID MAY BE MISALIGNED TO THE BODY OF PACKAGE BY A MAXIMUM OF .008 IN ANY DIRECTION
4. ALL PLATED SURFACES ARE GOLD OVER NICKEL

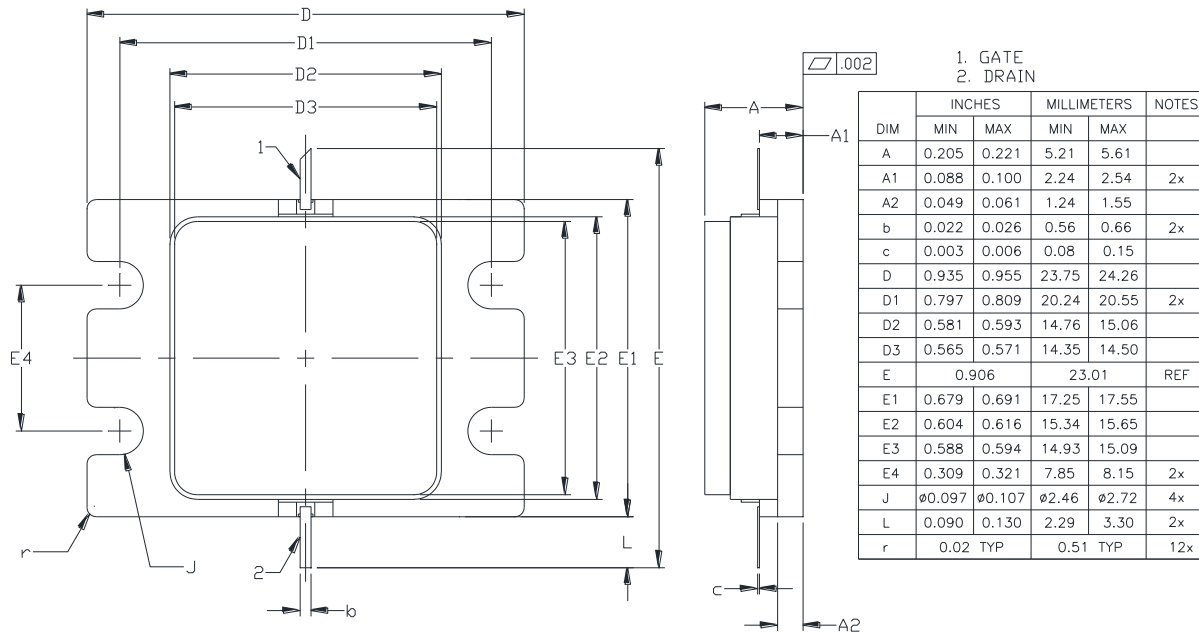

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.