
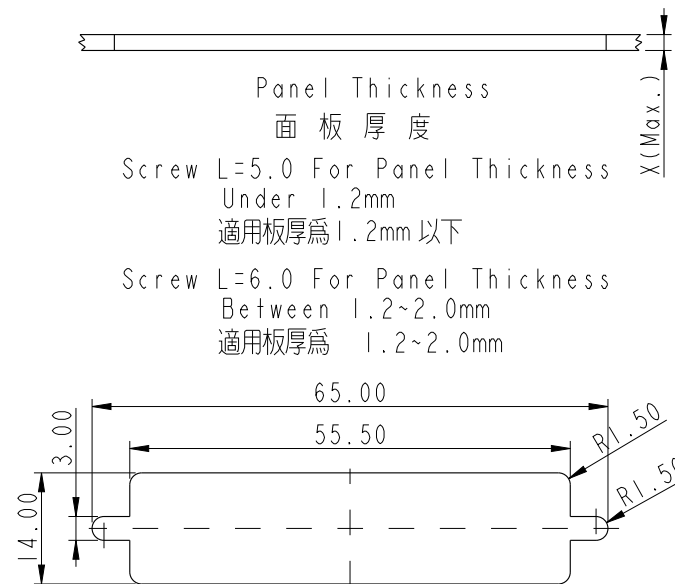


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-710143	2006/12/15	Gao Ling	Move O-ring to ZSE00100824
C	LEN1350290	2013/05/31	Yulong	Update the Dimension

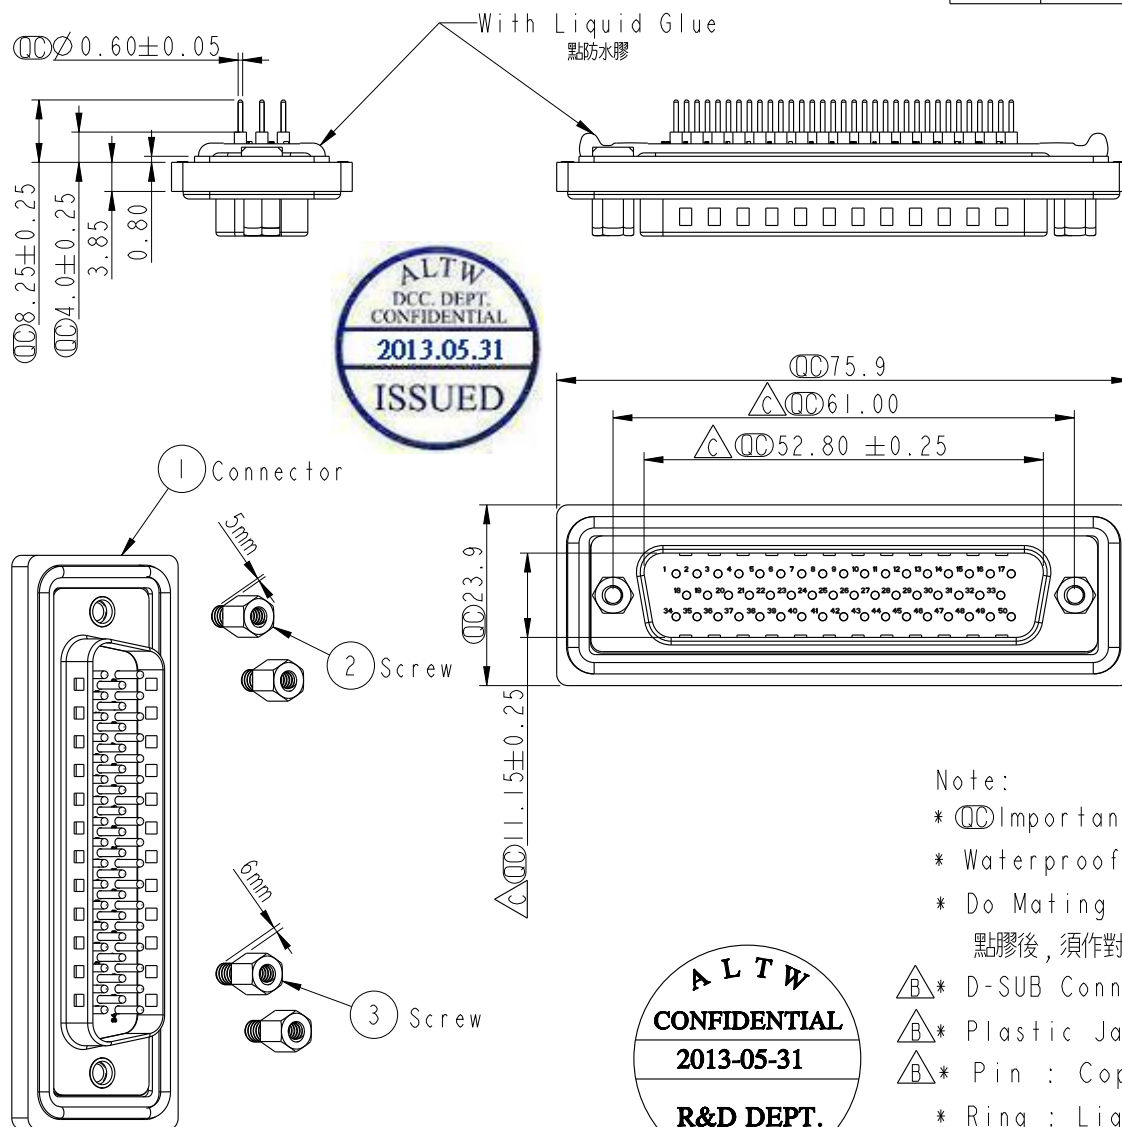

Recommended Panel Cut-Out

建議挖孔尺寸

Note:

* $\varnothing$ Important Dimension.

* Waterproof Rate : IP67

* Do Mating Test After Glued

點膠後, 須作對插測試



$\triangle$ * D-SUB Conn. : Black Core, PBT

$\triangle$ * Plastic Jacket : Black, Nylon+GF

$\triangle$ * Pin : Copper Alloy, Gold Plated

* Ring : Light Blue, Silicone

$\triangle$ * Screw : Copper Alloy, Nickel Plated, #4-40 UNC

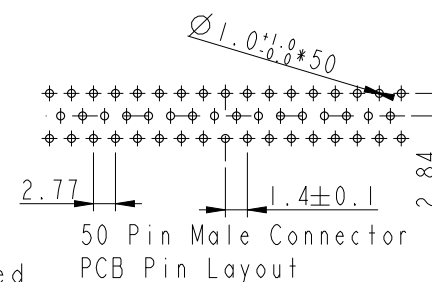

UNIT: mm		TOLERANCE		TITLE		ITEM NO.		DRAWN BY		DATE	
				D-SUB Conn. $\triangle$		SDB-50PMMP-SL7001		Yulong_wang		2013-05-31	
				Panel Screw DB50P M Conn M Pin		DWG NO.		CHECKED BY		DATE	
						SDB-50PMMP-SL7001		Victor		2013-05-31	
						CUSTOMER		APPROVED BY		DATE	
						ALTW		Maslow		2013-05-31	

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.