

5

4

3


2

1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

No. 1 contact

12,5 max.

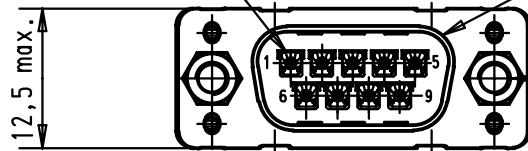

screw lock thread



Printed board layout
component side

4 x 2,74 = 10,96

3 x 2,74 = 8,22


2,74

No.1 contact

ø3,1 ±0,1
ø0,1

max. 3,2
6,2

0,6

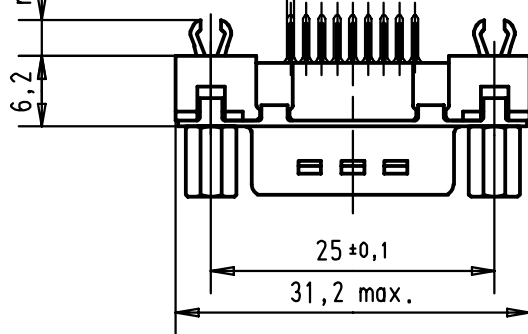

25 ±0,1
31,2 max.

No.6 contact

No.9 contact

ø1 ±0,1
ø0,05

Connector retention and insertion forces on the PCB = 25 / 80 newtons

09 65 161 6733	M3	2					Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, 9 poles, male, straight with solder pins 3.7, screw lock and grounding board lock.	Maßstab/ Scale 1,5:1
09 65 161 7733	M3	3				Detail.	07-FEB-02	JB			
09 65 161 5733	M3	0.76 µm Au				Insp.					
09 65 161 6713	4-40 UNC	2				Stand.					
09 65 161 7713	4-40 UNC	3	29723	05-MAR-02	CV	HARTING EURL F-95972 Paris				TB 09 65 161 X7X3	Blatt/ Page 1
09 65 161 5713	4-40 UNC	0.76 µm Au	29746	07-FEB-02	JB						
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name				Sub.		

09 65 161 7713
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	with grounding board locks
flange	with screw lock UNC 4-40
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 161 6713
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	with grounding board locks
flange	with screw lock UNC 4-40
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 161 5713
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	with grounding board locks
flange	with screw lock UNC 4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats
2D files

Typenblatt

Typenblatt