


Main product characteristics

$I_{F(AV)}$	20A (2 x 10A)
V_{RRM}	40V to 200V
$T_{j(MAX)}$	175°C

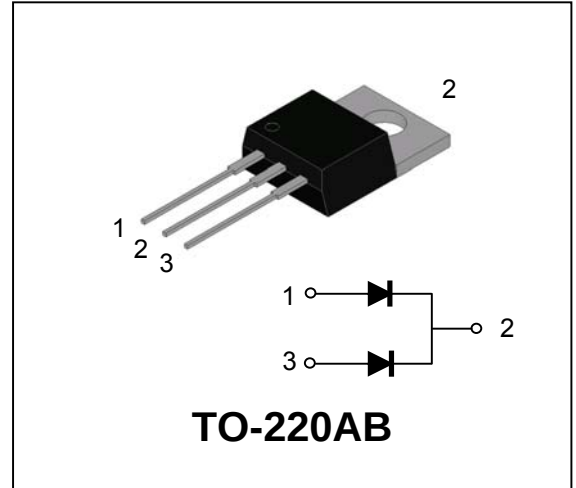

Features and benefits

- Plastic package with UL 94V-0 flammability classification
- Flame retardant epoxy molding component
- Guardring for overvoltage protection
- Low power loss, high efficiency
- RoHS compliant (2002/95/EC)

Description and applications

Double Schottky configuration for use in low voltage, high frequency inverters, free wheeling and polarity protection applications. The Metal silicon junction means the devices are majority carrier conduction leading to low power loss and high efficiency.

Electrical characteristics⁽¹⁾

Symbol	Parameter	MBR2040CT	MBR2045CT	MBR2050CT	MBR2060CT	MBR2080CT	MBR2090CT	MBR20100CT	MBR20150CT	MBR20200CT	Unit
V _{RRM}	Max Peak Repetitive Reverse Voltage	40	45	50	60	80	90	100	150	200	V
V _{R(RMS)}	Max RMS Reverse Voltage	28	31.5	35	42	56	63	70	105	140	V
V _R	Max DC Blocking Voltage	40	45	50	60	80	90	100	150	200	V
I _{F(AV)}	Max average forward current (see fig.1)	20									A
I _{FSM}	Non repetitive peak forward surge current (8.3ms single half sine wave)	200									A
V _F	Max forward voltage @ 10A (per leg)	0.70		0.75		0.80			0.90		V
I _R ⁽²⁾	Maximum instantaneous reverse current at rated V _R T _J = 25°C	0.05									mA
	T _J = 125°C	20									
T _{STG} , T _J	Storage and Junction temperature	-55 to +150		-65 to +175							°C

⁽¹⁾ All ratings at 25°C unless specified otherwise

⁽²⁾ Measured with a test pulse of 380µs to minimize self-heating effect

Schottky Barrier Rectifiers

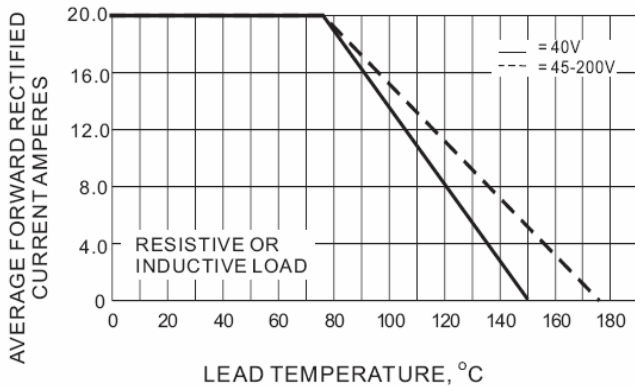


Fig.1 Forward current derating curve. For capacitive load derate by 20%

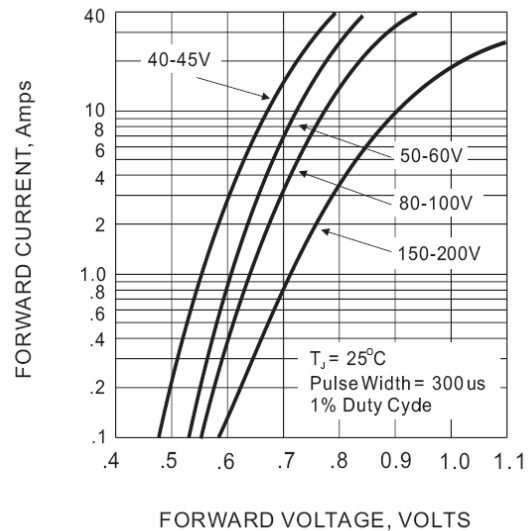


Fig.2 Typical instantaneous forward characteristics

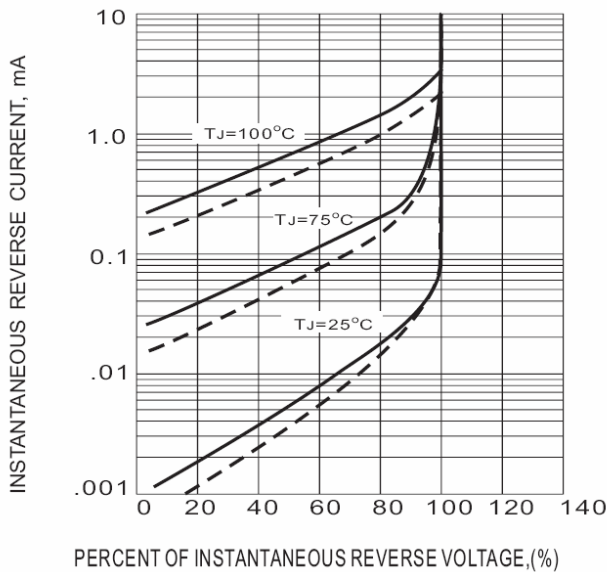


Fig.3 Typical reverse characteristics

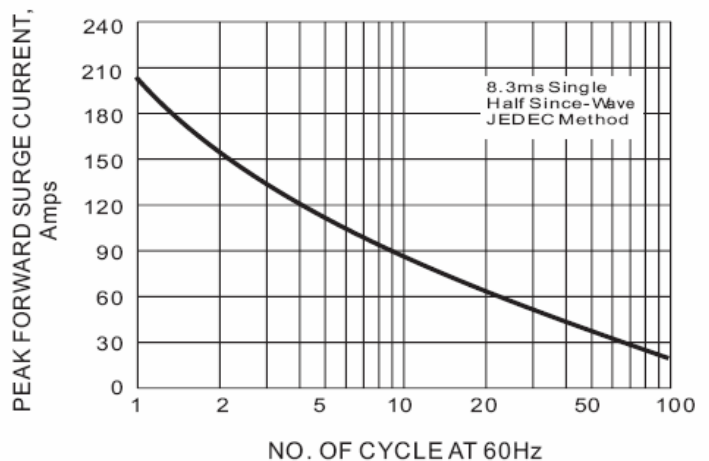



Fig.4 Maximum non repetitive surge current

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Junction to case	2.0	$^\circ\text{C}/\text{W}$

Mechanical Characteristics

Physical dimensions

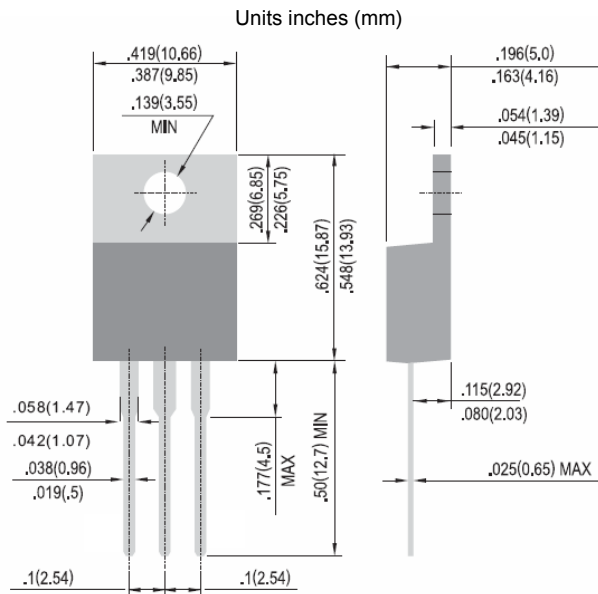

Ordering information

Product order code	Marking	Package	Weight	Base qty	Delivery mode
MBR20xxxCTe3/TU	MSC yyww MBR20xxxCT → ←	TO-220AB	1.895 g	2000	Tube

Commercial Business Unit
Microsemi Corporation

Microsemi Commercial Offshore de Macau Limitada
Avenida Doutor Mario Soares
Bank of China Building, 18/F, Unit D
Macau SAR

Please refer to www.microsemi.com for the terms and conditions of purchase