
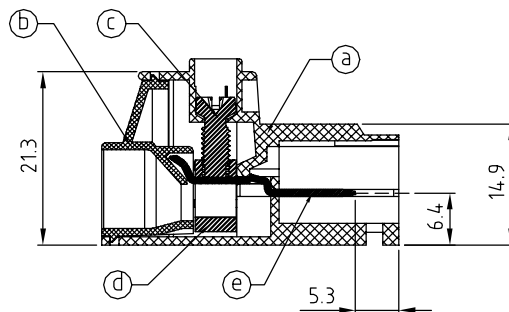
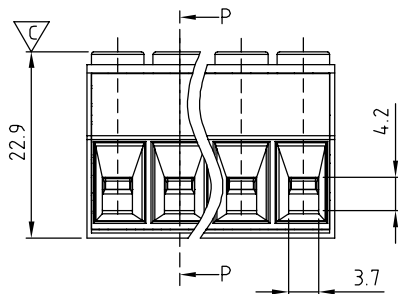
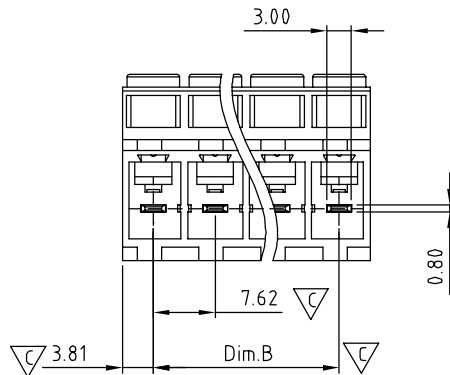


SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!!			

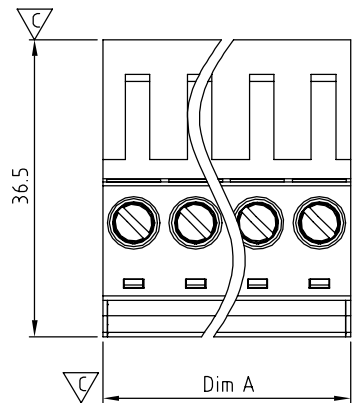

SECTION P-P

Material

- Item ㉓ Terminal(housing) : PA66 (UL94V-0)
- Item ㉔ Terminal(cover) : PA66 (UL94V-0) (ET 7.62)
- Item ㉕ Terminal screw : Steel Zinc plating " - " slot type (ET 7.62)
- Item ㉖ Clamp : Brass, Ni plated (ET 7.62)
- Item ㉗ Female contact : Copper. Tin plated

Electrical

- Voltage rating: 600VAC
- Current rating: 41A
- Solid wire (AWG): 8-24
- Stranded wire(AWG): 8-24
- Torque: 9.0 Lb-In
- Screw: M3.5
- Wire strip length: 10-11mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: 
- Critical dimension: 

KTxx01x0xxxxG

No. OF POLES
02: 2 POLES
:
16: 16 POLES

G: Pb<40000ppm

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request. please contact sales department.

COLOR
0 Black (RAL9005)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
C Green(RAL6018/U)

N = Number of poles

Dim.A	$N \times 7.62$
Dim.B	$(N-1) \times 7.62$

Dimension

Poles	Tolerance
2P-5P	± 0.20
6P-10P	± 0.30
11P-16P	± 0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KT 7.62 Series 2P-16P " - " Screw (Without Flange)					
PART NO.	KTxx01x0xxxxG			DWG NO.	8KT0001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Aaron 2011.10.18	Aaron 2011.10.18		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					REV.: B	X.XX ±0.10
SHEET: 01/01						X° ±1°