

5





4

3

2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

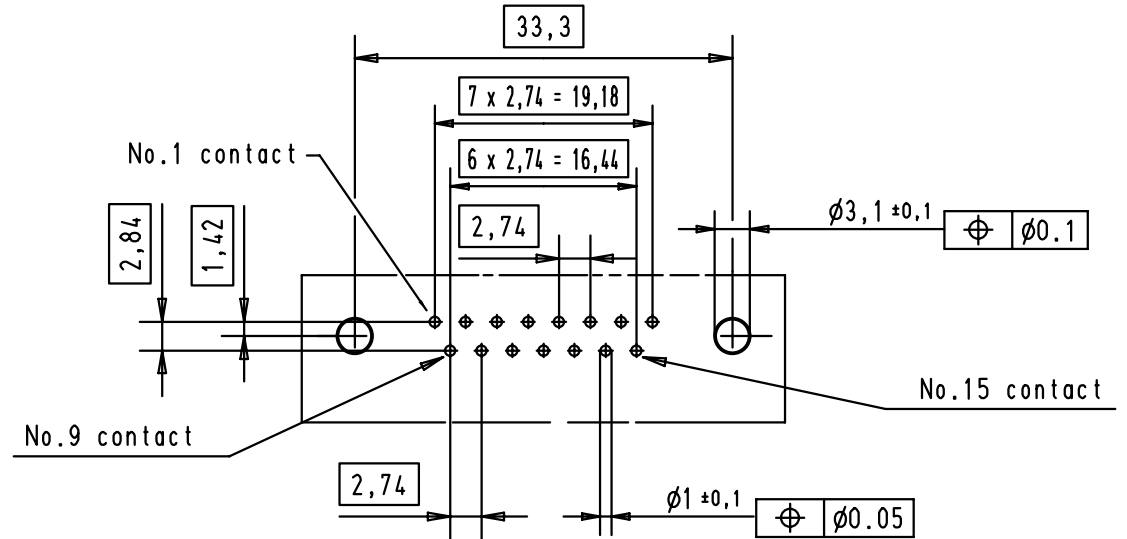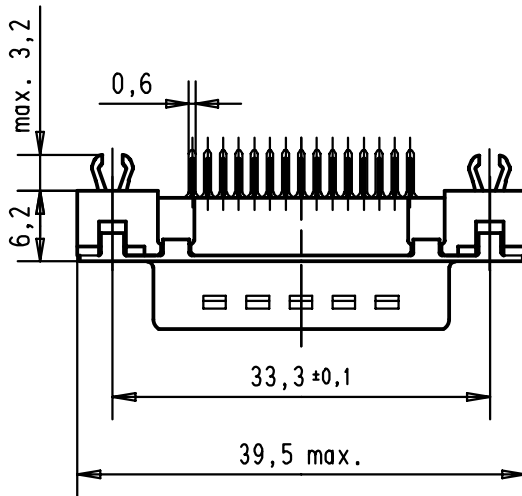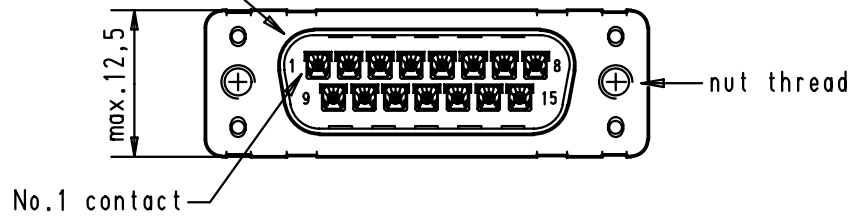

Connector retention and insertion forces on the PCB = 25 / 80 Newtons.

09 65 261 6711

M3

2

09 65 261 7711

M3

3

09 65 261 5711

M3

0.76 µm Au

09 65 261 6712

4-40 UNC

2

09 65 261 7712

4-40 UNC

3

09 65 261 5712

4-40 UNC

0.76 µm Au

29723

05/03/02

CV

Part number

Nut thread

Performance level

Mod.

Dat.

Name

Dat.

Name


Detail.

05/03/02

CV

Insp.

Stand.



All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris



D-Sub, 15 poles,
male, straight,
with solder pins 3.7,
nuts and grounding board lock

TB 09 65 261 X71X

Sub.

Maßstab/
Scale

1,5:1

Blatt/ Page

1

09 65 261 6711
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	15 way
Board fixing	with grounding board locks
flange	M 3
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 261 5711
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	15 way
Board fixing	with grounding board locks
flange	M 3
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 261 5712
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	15 way
Board fixing	with grounding board locks
flange	UNC4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats
2D files

Typenblatt

Typenblatt

09 65 261 6712
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	15 way
Board fixing	with grounding board locks
flange	UNC4-40
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 261 7711
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	15 way
Board fixing	with grounding board locks
flange	M 3
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 261 7712
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	15 way
Board fixing	with grounding board locks
flange	UNC4-40
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF