

5

4

3


2

1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

No. 1 contact


12,5 max.

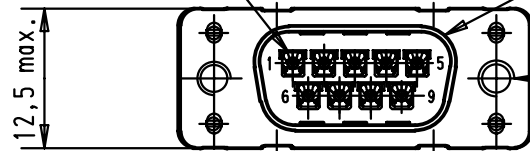

nut thread



Printed board layout
component side

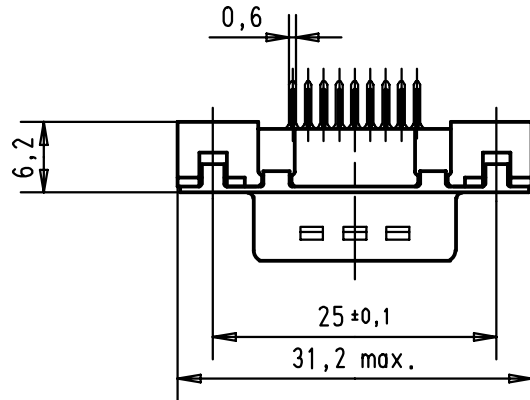

$$4 \times 2,74 = 10,96$$

$$3 \times 2,74 = 8,22$$

$$2,74$$

No.1 contact

$$\phi 3,1 \pm 0,1$$

$$\phi 0,1$$

$$2,84$$

$$1,42$$

$$2,74$$

$$\phi 1 \pm 0,1$$

$$\phi 0,05$$

No.6 contact

$$25$$

No.9 contact

09 65 121 6701

M3

2

09 65 121 7701

M3

3

09 65 121 5701

M3

0.76 μ m Au

09 65 121 6702

4-40 UNC

2

09 65 121 7702

4-40 UNC

3

09 65 121 5702

4-40 UNC


0.76 μ m Au

29723

05/03/02

CV

HARTING EURL
F-95972 Paris



All Dim. in mm
Orig. Size DIN A 4

D-Sub, 9 poles,
male, straight,
with solder pins 3.7,
and nuts.

Maßstab/
Scale

1,5:1

TB 09 65 121 X70X

Blatt/ Page

2

Part number

Nut thread

Performance level

Mod.

Dat.

Name

Sub.

09 65 121 6702
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 121 5702
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 121 6701
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 121 5701
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats
2D files

Typenblatt

Typenblatt

09 65 121 7701
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 65 121 7702
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Stamped solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF