

Series 805 Mighty Mouse

Triple-Start ACME Thread Plug

805-001 and 805-002 Ordering Information



Two Shell Styles: Integral platform for direct shield attachment using Band-Master™ ATS termination system, or accessory thread for attaching a strain relief.


EMI Ground Spring Achieves low shell-to-shell resistance. This nickel-plated beryllium copper spring enables the Series 805 to meet greater than 60 dB shielding effectiveness from 100 MHz to 15 GHz.

Ratchet Design for Secure Coupling


Series 805 connectors feature a spring mechanism in the coupling nut that locks into radial teeth on the plug barrel. This feature allows the Series 805 to stay mated even when under high vibration, without the need for safety wire or torque tools.

How To Order							
Sample Part Number	805-001	-16	M	8-4	P	A	
Series (See Table I)	805-001 = Plug with Banding Platform 805-002 = Plug with Accessory Thread						
Shell Style	-16 = Plug Connector with Ratcheting Anti-Decoupling Mechanism						
Shell Material and Finish	C = Aluminum / Black Anodize (Non-Conductive); RoHS Compliant M = Aluminum / Electroless Nickel; RoHS Compliant MT = Aluminum / Nickel-PTFE RoHS Compliant NF = Aluminum / Cadmium with Olive Drab Chromate ZN = Aluminum / Zinc-Nickel with Olive Drab Chromate ZNU = Aluminum / Zinc-Nickel with Black Chromate Z1 = Stainless Steel / Passivated; RoHS Compliant						
Shell Size - Insert Arrangement	See Contact Arrangements Page H-2						
Contact Type	Connector supplied with contacts P = Pin S = Socket	Connector supplied without contacts A = Pin Connector, less contacts B = Socket Connector, less contacts					
	Connector with contacts are supplied with signal and/or power crimp contacts. These contacts are not installed. Coaxial contacts and non-standard signal contacts are ordered separately.						
Shell Key Positions (See Table II)	A = Normal B = Pos. B C = Pos. C D = Pos. D E = Pos. E F = Pos. F						

Table I: Series




805-001
Plug with Banding Platform



805-002
Plug with Accessory Thread

Table II: Key Positions

Key Position	Key Rotation	
	A	B
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

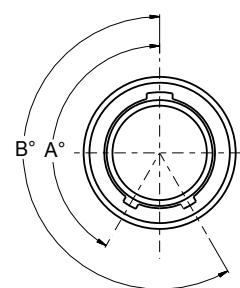

Dimensions in Inches (millimeters) are subject to change without notice.


Series 805 Mighty Mouse Triple-Start Threaded Coupling Contact Arrangements

Contact Arrangements		No. of Contacts					
Contact Arr.		#23	#20	#20HD	#16	#12*	#8
8-1					1		
8-23				3			
8-4	4						
8-6	6						
8-7	7						
9-1						1	
9-25				5			
9-10	10						
10-2					2		
10-28			8				
10-13	13						
10-200	4	2					
11-4				4			
11-210			10				
11-19	19						
11-200	4			2			
11-201	8	2					
12-2					2		
12-5				5			
12-26	26						
12-200	12				1		
12-201	4				2		
12-202	8			2			
13-31	31						
15-2				2			
15-3				3			
15-7				7			
15-220			20				

*All arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688

Contact Legend

#23° #20HD● #20● #16◐ #12⊕

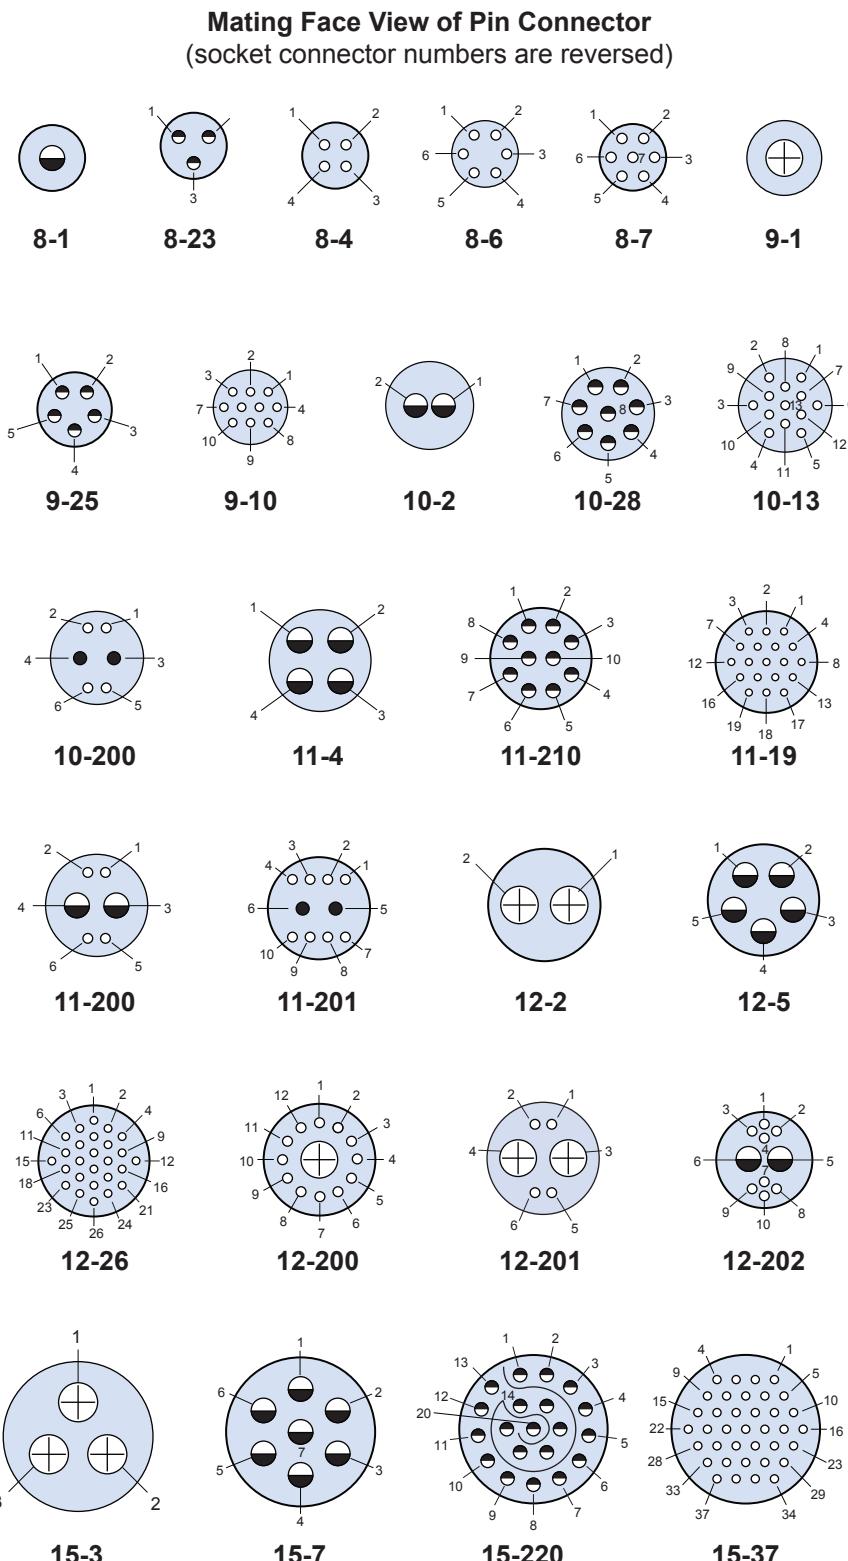

Dimensions in Inches (millimeters) are subject to change without notice.

**Series 805 Mighty Mouse
Triple-Start Threaded Coupling
Contact Arrangements**




Series 805

Contact Arr.	No. of Contacts					
	#23	#20	#20HD	#16	#12*	#8
15-37	37					
15-200	6				2	
15-201	10				2	
15-202	20			2		
15-203	12			4		
15-204	12				2	
15-205	4				4	
18-5					5	
18-12				12		
18-235			35			
18-55	55					
18-204	40				2	
18-205	32				4	
18-206	34				2	
18-207	20			4		
18-208	32					1
19-7						7
19-14				14		
19-241			41			

*All arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688

**Mating Face View of Pin Connector
(socket connector numbers are reversed)**

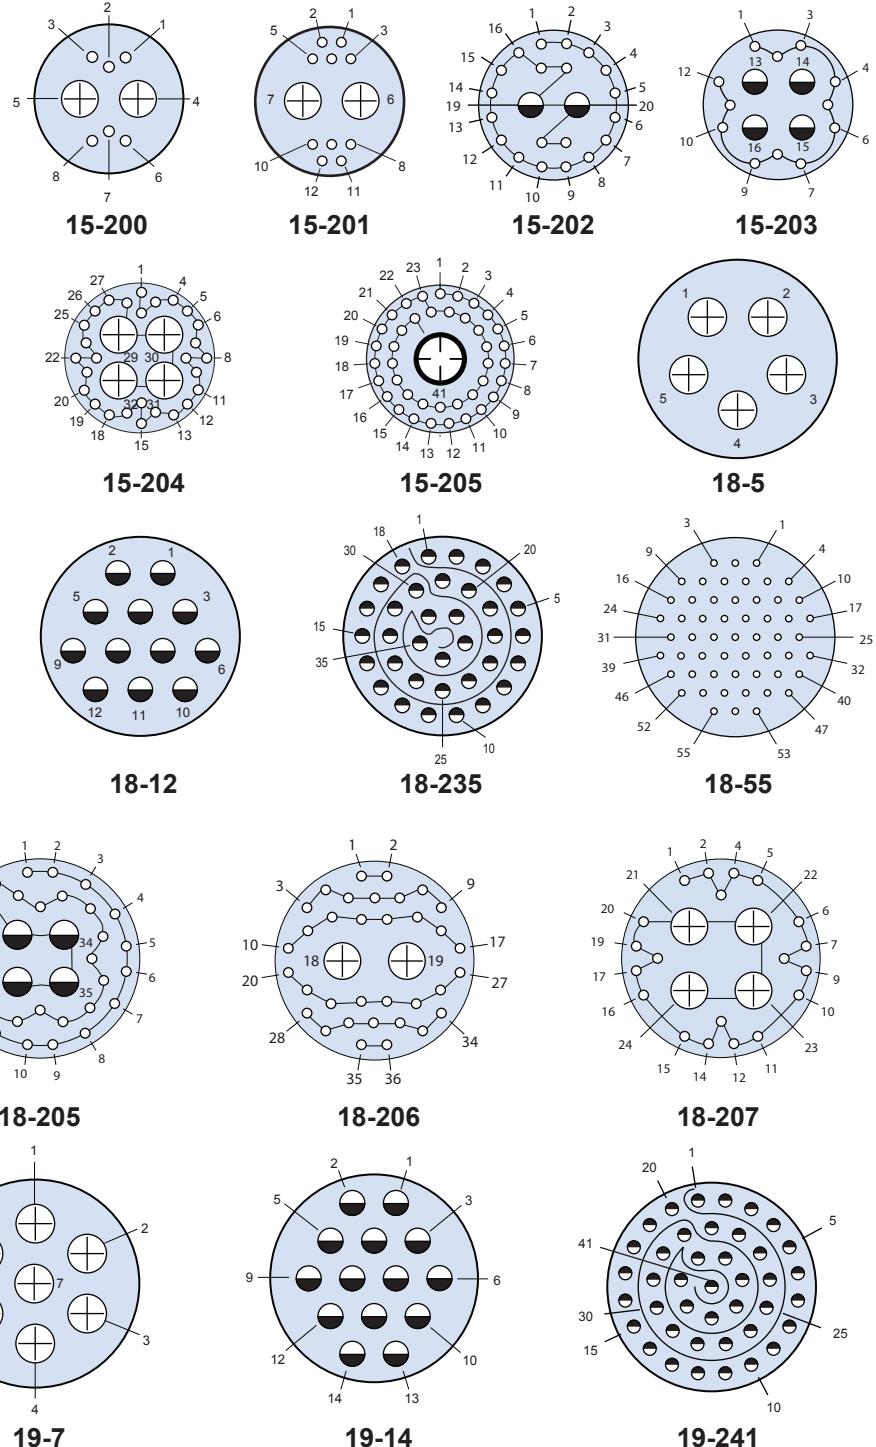

Dimensions in Inches (millimeters) are subject to change without notice.

Series 805 Mighty Mouse Triple-Start Threaded Coupling Contact Arrangements


Contact Arr.	Contact Arrangements					
	#23	#20	#20HD	#16	#12*	#8
19-85	85					
19-203	40			4		
19-204	28				4	
19-205						
21-19				19		
21-255			55			
21-100	100					
21-201	44					2
21-202	12					4
23-12					12	
23-22				22		
23-269			69			
23-130	130					
23-200	28					4

*All arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688

Contact Legend

#23○ #20HD○ #20● #16● #12⊕

Mating Face View of Pin Connector (socket connector numbers are reversed)

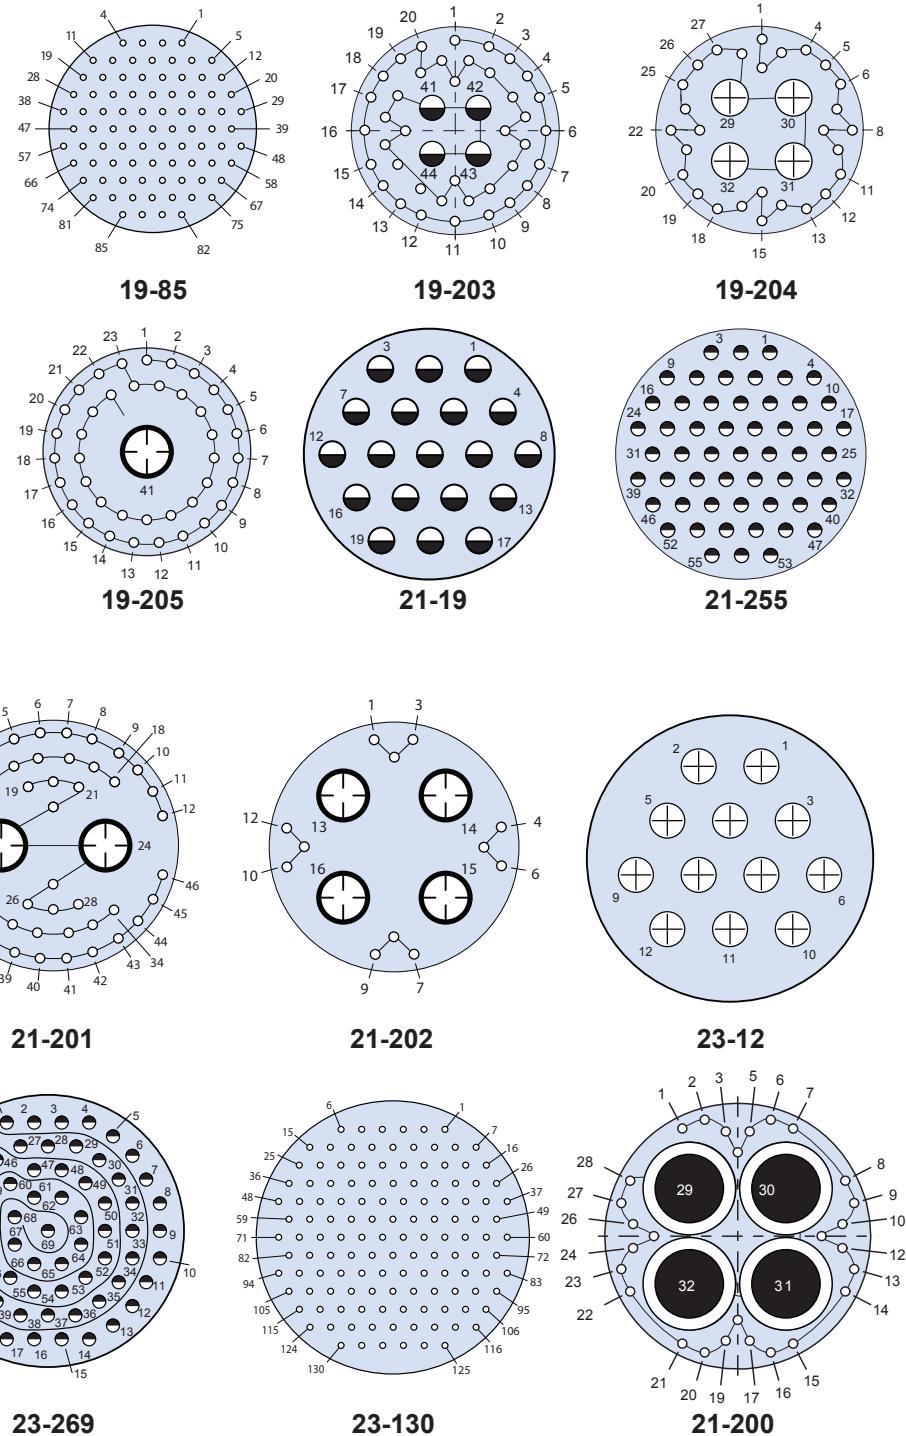


Dimensions in Inches (millimeters) are subject to change without notice.

**Series 805 Mighty Mouse
Triple-Start Threaded Coupling
General Information**



Series 805

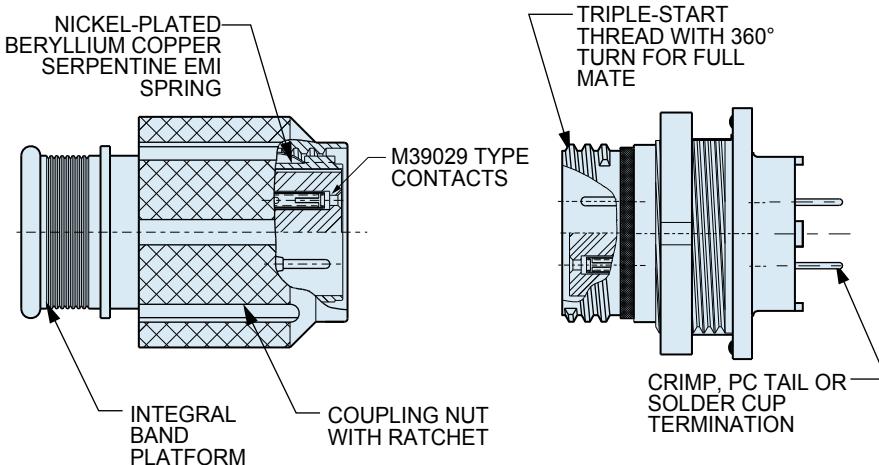

Outstanding EMI Shielding

Nickel-plated beryllium copper ground spring and metal-to-metal bottoming for excellent EMI performance.

Triple-Start Coupling

Rugged ACME threads resist cross-threading and allow fast mating.

Environmentally Sealed

Meets MIL-STD-810 Method 512 immersion.

Ratchet Mechanism

Ratcheting anti-decoupling mechanism prevents coupling nut backoff when subjected to vibration.

Glenair's Series 805 Connector Offers Outstanding EMI Protection and Vibration Resistance in a Miniaturized Package

The Series 805 connector was developed to provide several performance enhancements compared to other "Mighty Mouse" versions. A ratchet mechanism in the coupling nut prevents de-mating under severe vibration. EMI performance is improved with a serpentine ground spring on the plug barrel. This nickel plated beryllium copper spring assures low shell-to-shell resistance. The Series 805, although larger than other Series 80 versions, saves size and weight compared to MIL-DTL-38999 connectors with no compromise in performance.



Specifications	
Current Rating	#23-5 A, #20HD-7.5 A, #16-13 A, #12-23 A
Dielectric Withstanding Voltage	#23-750 VAC, #20HD-1000 VAC #12 and #16-1800 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness	55 dB minimum low frequency from 100MHz to 1000MHz. and 65 dB minimum high frequency from 1 GHz to 10GHz.
Magnetic Permeability	2.0 μ maximum
Durability	2000 mating cycles

Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 μ inch gold plated
Insulators	Liquid crystal polymer (LCP)
Contact Retention Clip	Beryllium copper alloy
Seal, O-rings, Grommet	Fluorosilicone rubber
Spring	Nickel-plated beryllium copper
See Series 80 General Information for complete material and finish specs.	

H

Dimensions in Inches (millimeters) are subject to change without notice.