
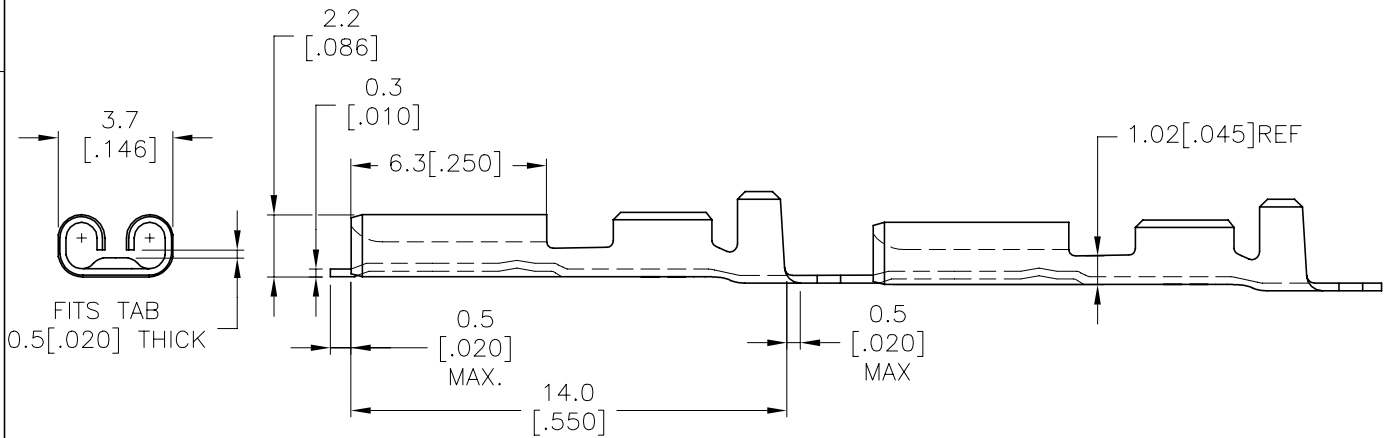


REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN APVD
	G	REVISED PER ECR-21-100133	10FEB2021	BDA DH

- 1 SPLICE FREE, FOR AMP_O_MATOR.
- 2 REELED WITH PAPER LAYER.
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

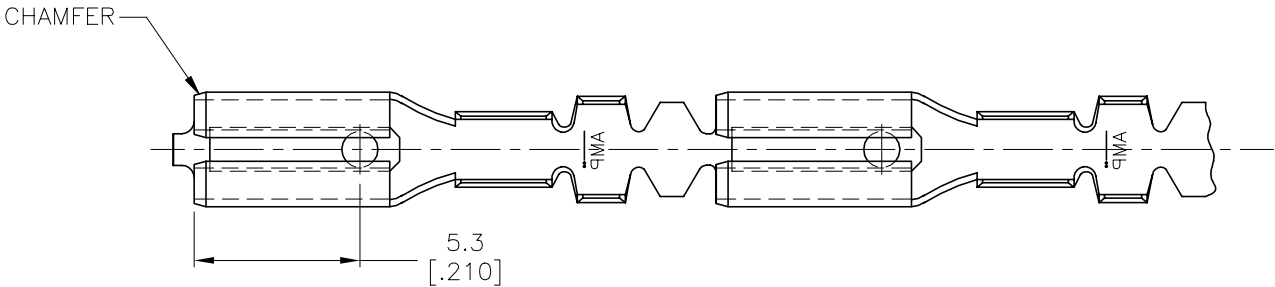

TIN	BRASS	2	6-160316-4
TIN-LEAD	PHOSPHORBRONZE		6-160316-3
TIN-LEAD	BRASS		6-160316-2
PRE-TIN HOT DIP	PHOSPHORBRONZE		6-160316-0
TIN	BRASS	1	5-160316-9
NONE	BRASS	1	5-160316-8
GOLD	PHOSPHORBRONZE		5-160316-7
TIN	PHOSPHORBRONZE		5-160316-6
NONE	PHOSPHORBRONZE		5-160316-5
GOLD	BRASS		5-160316-4
SILVER	BRASS		5-160316-3
TIN	BRASS		5-160316-2
NONE	BRASS		5-160316-1
FINISH	MATERIAL		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.KESSLER 11-04-94	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK P.BEIJNON		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L.V. SOEST	NAME .110 SRS FASTON RECEPTACLE	
0 PLC ± 1.0 1 PLC ± 0.5 2 PLC ± 0.2 3 PLC ± - 4 PLC ± - ANGLES ± 1°		PRODUCT SPEC -	SIZE A3	
MATERIAL -		APPLICATION SPEC -	CAGE CODE 00779	
WIRE RANGE : 0.3-0.56mm ² (22-20 AWG)		WEIGHT -	DRAWING NO C=160316	
INSUL-RANGE : ø 1.0-2.0 (ø .050-.080)		CUSTOMER DRAWING		RESTRICTED TO -
		SCALE 6:1		SHEET 1 OF 1
				REV G