
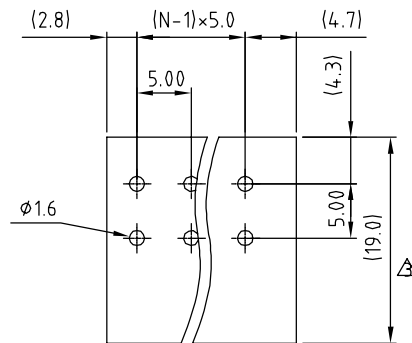
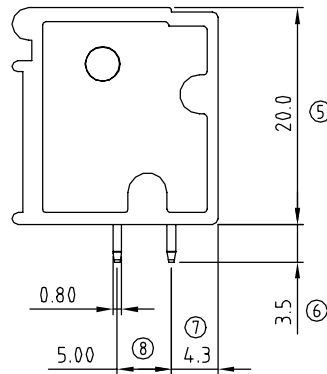
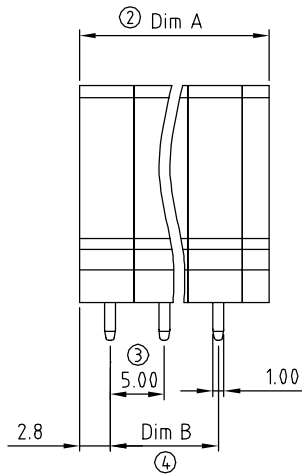


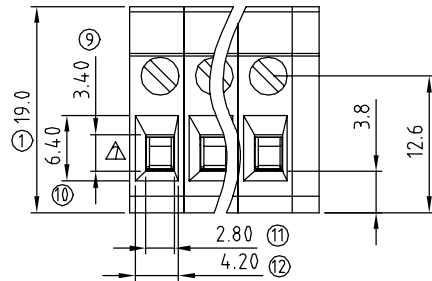

P.C.B LAYOUT

N = Number of poles
Dim A=Nx5.0+2.5
Dim B=(N-1)x5.0

	Dim A	Dim B
2-6p	±0.20	±0.20
7-12p	±0.25	±0.25
13-18p	±0.35	±0.35
19-24p	±0.40	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△	11/01'05	Standard spec is changed.	Marivn
△	02/01'07	Soldering temperature is changed from 245°C to 250°C	Marivn
△	08/25'10	Dim 15.2 TO 19.0	Tason
△	08/25'10	Add the tolerance table	Tason
△	08/25'10	Operating tem. changed from -30°~+105° to -40°~+115°	Tason
△	08/25'10	Add the Measuring Symbol	Tason
△	03/29'10	The wire inlet is changed.	Tason

Material

- Terminal body (metal housing): steel stamped
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): NL66 (UL94V-0)

△ Electrical cULus

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque(Lb-In): 2.4
- Screw: M2.5
- Wire strip length: 10-11mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:



TR xx 05 x 0 xxxx G

	COLOR		
02 2Poles	0 Black (RAL9005)	0000: "A" Logo	RoHS
03 3Poles	2 Red (RAL3001/D)	000A: "ANYTEK" Logo	Pb<40,000ppm
... ..	3 Orange(RAL2011/P)		
24 24Poles	4 Yellow(RAL1018/A)	Any special item by customer request.	
	5 Green(RAL6018/T)	please contact sales department.	
	6 Blue (RAL5015/A)		
	8 Grey(RAL7035/D)		
	C Green(RAL 6018/U)		

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TR 5.0 Series Vertical (90D wire inlet)						
PART NO.		TRxx05x0xxxxG			DWG NO.		8TR0002	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
			Tason 2011.03.29	Marvin 2007.02.05			UNIT: mm	X. ±0.50
					SHEET: 01/01		SCALE: NONE	X.X ±0.30
							REV: F	X.XX ±0.10
								X° ±1°