

Actuator

92-
458.200



<https://eao.com/p/92-458.200>

Your product:



92-458.200 Actuator

FRONT

Front bezel colour:	Black
Front form:	square
Front bezel material:	Plastic
Front dimension:	18,4 mm x 18,4 mm

MOUNTING

Design:	PCB
---------	-----

OPERATING-/INDICATION PART

Lens colour:	Red
Lens shape:	flush
Lens illumination:	illuminative
Lens material:	Plastic
Illumination colour:	Red
Lens optics:	transparent

ELECTRICAL CHARACTERISTICS

Electric strength:	500 VAC, 50 Hz, 1 minute according to IEC 60512-5-9c
Electrostatic discharge (ESD):	15 kV
Electrical lifetime:	500 000 cycles of operation at 42VDC, 50mA, according to IEC 6512-5-9c
Switching voltage and switching current:	

Switching voltage	min. 50 m VAC/DC max. 42 VAC/DC
Switching current	min. 10 μ A AC/DC max. 100 mA AC/DC
Power rating	max. 2 W

MECHANICAL CHARACTERISTIC

Switching system:	Short-travel switching system with 2 independent contact points Guarantees reliable switching even of very light loads. Fitted with 1 normally open contact.
Mechanical lifetime:	≥ 1 Mio. cycles of operation
Weight:	0.003 kg
Operating Travel:	ca. 0.4 mm switching element
Tightening torque:	Fixing nut max. 0.5 Nm, Fixing screw mounting flange 0.4 Nm
Switching system:	Short-travel element
Switching action:	Momentary
Operating force:	2.7 N $\pm$ 1 N switching element, 5 N lens

AMBIENT CONDITION

Vibration resistance:	Max. 100 m / s ² from 10 Hz ... 500 Hz, 10 cycles, 3-axis (sinusoidal EN IEC 60068-2-6)
Operating temperature:	- 25 °C ... + 70 °C
Storage temperature:	- 40 °C ... + 80 °C
Shock resistance:	Max. 500 m/s ² , pulse width, 3-axis (sinusoidal EN IEC 60068-2-27)
IP Protection:	IP40 front side


CERTIFICATE

Conformities:	CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)
Approbations:	CQC


OTHER

Housing colour:	White
Dimension:	18.4 mm x 18.4 mm
Short Description:	Actuator, 18,4 mm x 18,4 mm, flush, illuminative, Red, Plastic, transparent, square, Black, Plastic, Momentary, Red
Housing material:	Plastic

Wiring diagrams:

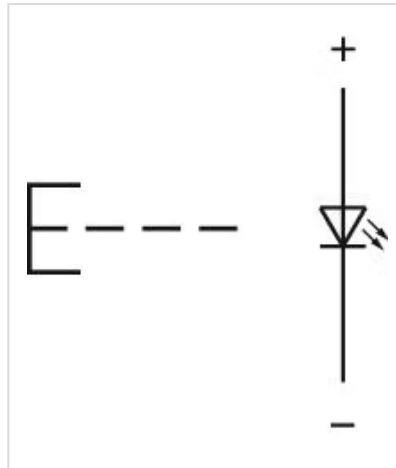

Mounting cut-outs:

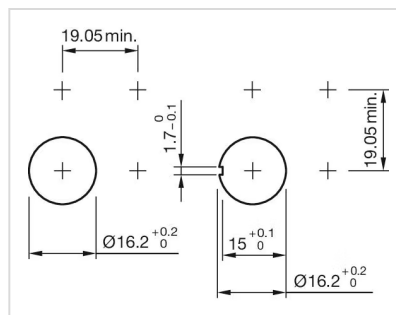

Dimension drawings:

