

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ACTUATOR

CATALOG LISTING

JM-25

5

JM-25

M

DRAWING
NUMBER

6

14SEP05

RJ

CHECK

77

27 JUN 77

KG

CHECK

77

27 JUN 77

KG

CHECK

77

KG

CHECK

77

KG

CHECK

77

KG

CHECK

77

KG

CHECK

77

KG

CHECK

77

KG

CHECK

77

KG

CHECK



77

KG

CHECK

77

KG

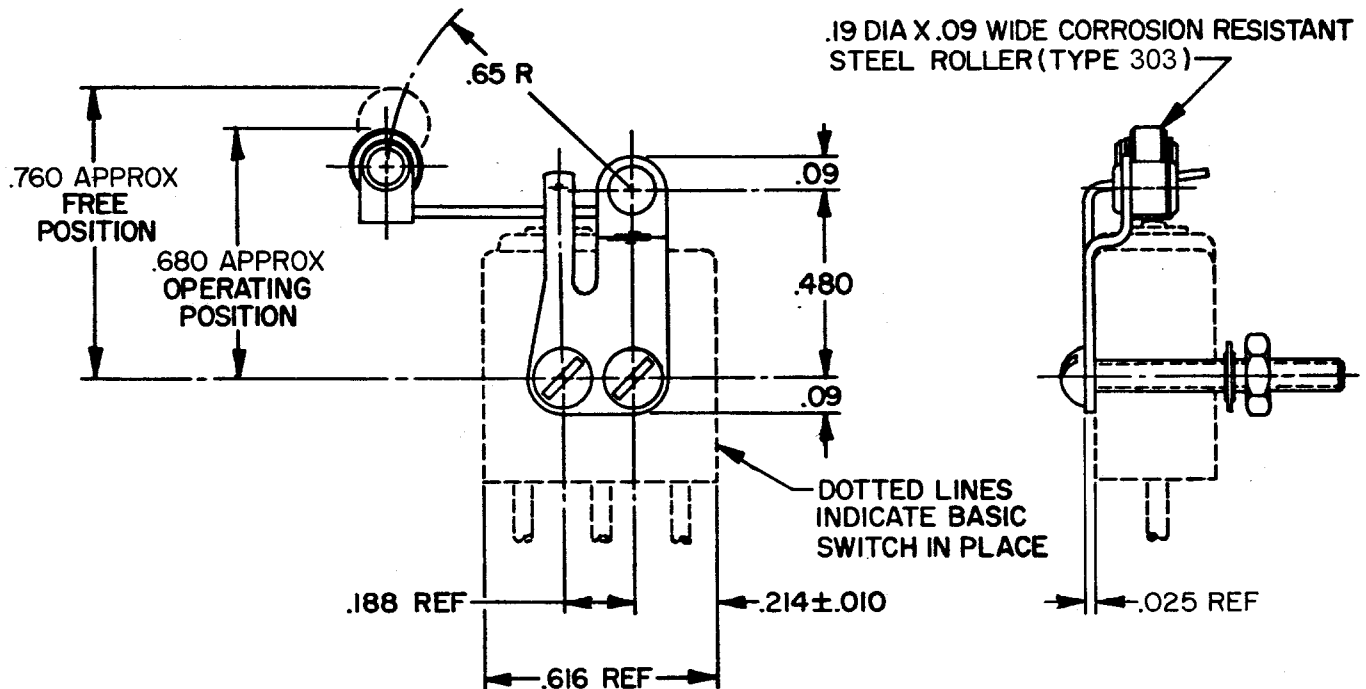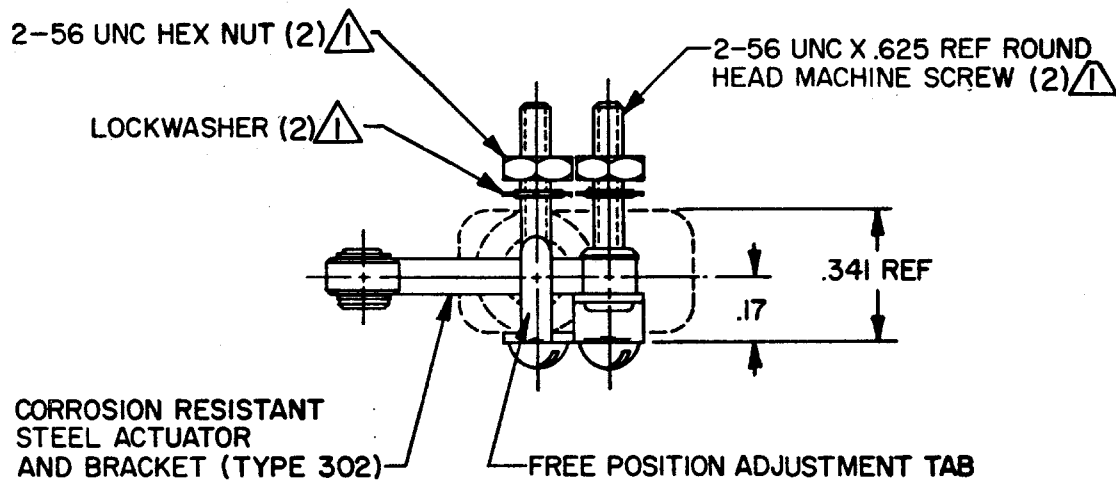

NOTE -

①


FURNISHED UNASSEMBLED

②

CHARACTERISTICS TAKEN WITH IXE40I-6 BASIC SWITCH INSTALLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

②

OPERATING FORCE ——— 5.5 OZ MAX

RELEASE FORCE ——— 4 GRAMS MIN

DIFFERENTIAL TRAVEL ——— .030 MAX

OVERTRAVEL ——— .020 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

SCALE

2 TO 1

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/.04	
ONE PLACE	X,X	0.4/.016	X,X
TWO PLACES	X,X,X	0.15/.006	X,X,X
THREE PLACES	X,X,X,X	0.08/.003	X,X,X,X
ANGLES			

DESIGN UNITS

SI METRIC

US CUSTOMARY

WEIGHT

FO-52848-A

DRAWN

K P

K 24

JUN 77

CHECK

77

KG