
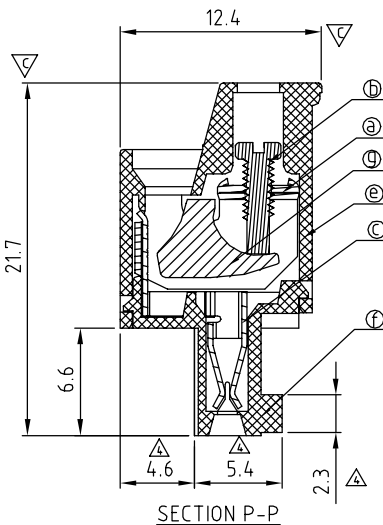
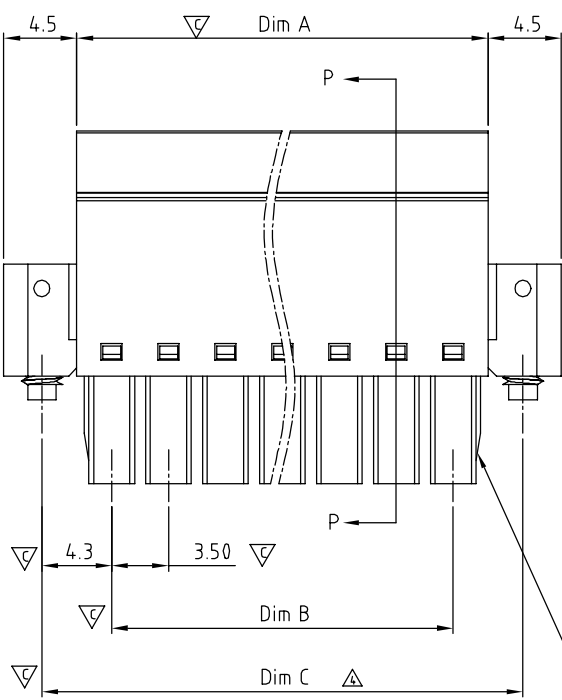


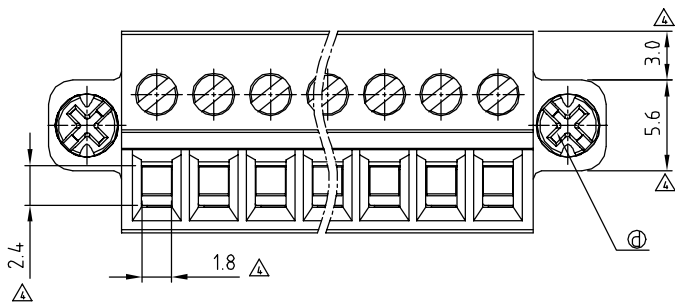

SIGN	DATE	DESCRIPTION	APPROVER
△	2008.12.02	Flange screw changed from "-" to "+/-"	Tony
△	2010.04.17	The Grey code changed from RAL7004/P to RAL7035/D	Jacke
△	2010.04.17	Add cULus standard	Jacke
△	2011.08.29	The dimension are added	Aaron
△	2011.08.29	Material is changed from Brass to Steel	Aaron
△	2011.08.29	Poles is changed from 7p-24p to 2p-24p	Aaron
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- Material**
- Item a Clamp: Steel zine plated.
 - Item b Terminal screw: Steel Zinc plating "-" slot type
 - Item c Female contact: PhBz Tin plated
 - Item d With flange screw: Steel zine plated M2.5"/+/-"slot type
 - Item e Terminal (Up body): Thermoplastic (UL94V-0)
 - Item f Terminal (Down body): Thermoplastic (UL94V-0)
 - Item g Clampage: Steel Zinc plated

- Electrical cULus**
- Voltage rating: 300VAC
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 16-28
 - Stranded wire(AWG): 16-28
 - Torque: 1.7Lb-In
 - Screw: M2
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Safety approval: cULus
 - Critical dimension: ▽

VM xx 1 5 x 2 xxxx G

No. OF POLES ———— G: Pb<40000ppm
 02: 2 POLES ———— 0000: "@"logo
 : ———— 000A: "ANYTEK"logo
 24: 24 POLES ———— Any special item by customer request.
 0 Black (RAL9005) please contact sales department.
 △ 5 Green(RAL6018/T)
 6 Blue (RAL5015/A)
 8 Grey(RAL7035/D)
 C Green(RAL6018/U)

Dimension

N = Number of poles

Dim A	Nx3.5+0.80
Dim B	(N-1)x3.5
Dim C	(N-1)x3.5+8.6

Poles	Tolerance
2p-6p	±0.10
7p-12p	±0.20
13p-18p	±0.30
19p-24p	±0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VM 3.5mm W/Flange Series (2P-24P) 						
PART NO.	VMxx15x2xxxxG			DWG NO.	8VM0601		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Aaron 2011.08.29	Aaron 2011.08.29	UNIT: mm/in			X. ±0.50
				SCALE: NONE			X.X ±0.30
				SHEET: 01/01	REV: E	X.XX ±0.10	
						X° ±1°	