


440-071 EMI/RFI Dual Banding Adapter Direct Coupling - Standard Profile


CONNECTOR DESIGNATORS A-B*-C-D-E-F G-H-J-K-L-S

* Conn. Desig. B See Note 4



DIRECT COUPLING

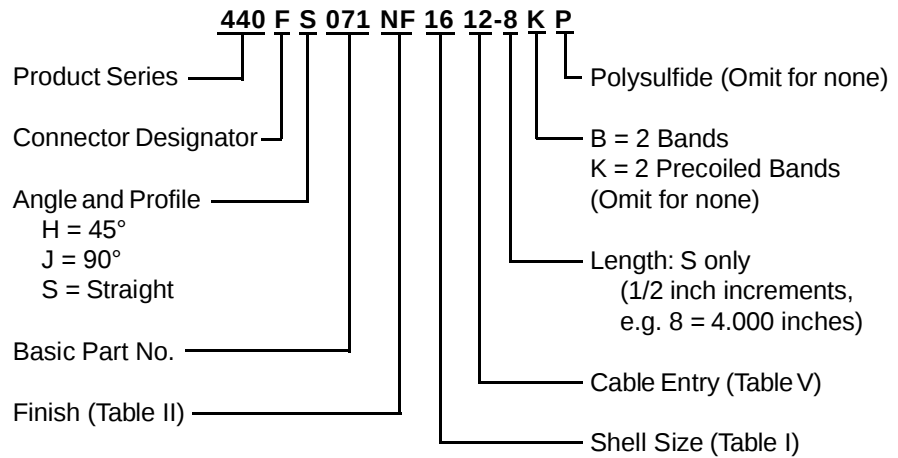

Length ± .060 (1.52)
Min. Order Length 2.0 Inch
(See Note 3)





**STYLE 2
(STRAIGHT
See Note 1)**

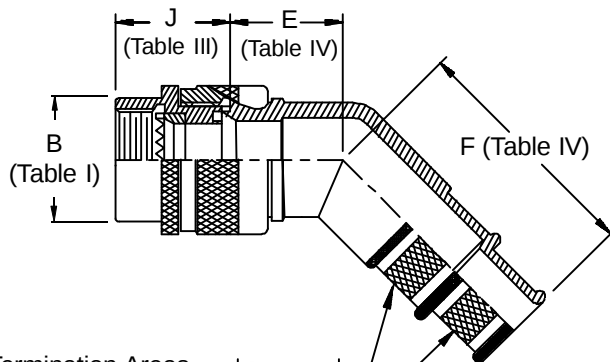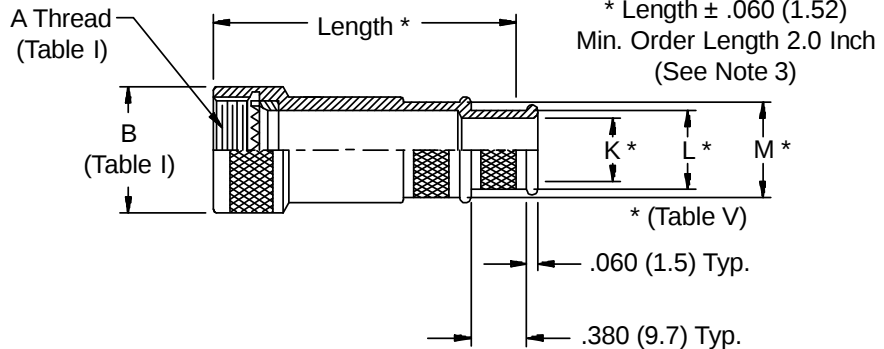

Termination Areas
Nickel Plated.
Knurl or Ridges
Mfr's Option

Polysulfide Stripes
P Option

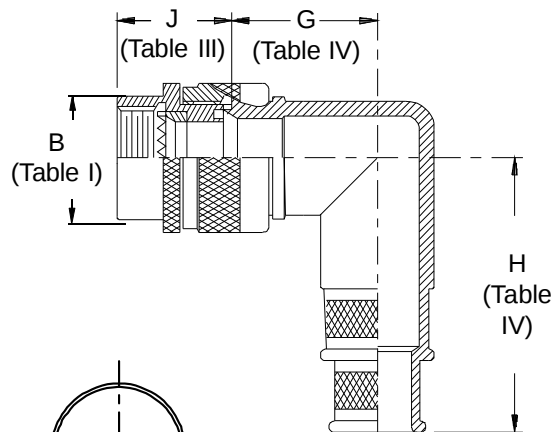

Band Option
(K Option Shown -
See Note 5)

440-071
EMI/RFI Dual Banding Adapter
Direct Coupling - Standard Profile



440

See inside back cover
fold-out or pages 13 and
14 for Tables I and II.

TABLE III: FRONT ADAPTER			
Shell Size	J Max - Conn. Designator		
	A-E-F		
	J-H-L-S	D-B-G-K	C
08/09	1.180 (30.0)	1.250 (31.8)	
10/11	1.180 (30.0)	1.250 (31.8)	
12/13	1.180 (30.0)	1.250 (31.8)	1.735 (44.1)
14/15	1.180 (30.0)	1.250 (31.8)	1.915 (48.6)
16/17	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
18/19	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
20/21	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
22/23	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
24/25	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
28/29	1.610 (40.9)	1.560 (39.6)	1.915 (48.6)
32/33	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
36	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
40	1.610 (40.9)	2.190 (55.6)	1.915 (48.6)

TABLE IV: ELBOW DIMENSIONS				
Elbow Size	E Max	F Max	G Max	H Max
02	.639 (16.2)	1.328 (33.7)	.750 (19.1)	1.438 (36.5)
03	.639 (16.2)	1.328 (33.7)	.750 (19.1)	1.438 (36.5)
04	.639 (16.2)	1.328 (33.7)	.750 (19.1)	1.438 (36.5)
05	.664 (16.9)	1.358 (34.5)	.810 (20.6)	1.498 (38.0)
06	.664 (16.9)	1.358 (34.5)	.810 (20.6)	1.498 (38.0)
07	.688 (17.5)	1.378 (35.0)	.870 (22.1)	1.558 (39.6)
08	.688 (17.5)	1.378 (35.0)	.870 (22.1)	1.558 (39.6)
09	.705 (17.9)	1.408 (35.8)	.920 (23.4)	1.628 (41.4)
10	.732 (18.6)	1.428 (36.3)	.980 (24.9)	1.688 (42.9)
11	.732 (18.6)	1.428 (36.3)	.980 (24.9)	1.688 (42.9)
12	.748 (19.0)	1.438 (36.5)	1.020 (25.9)	1.708 (43.4)
13	.773 (19.6)	1.458 (37.0)	1.080 (27.4)	1.768 (44.9)
14	.773 (19.6)	1.458 (37.0)	1.080 (27.4)	1.768 (44.9)
15	.800 (20.3)	1.498 (38.0)	1.140 (29.0)	1.848 (46.9)
16	.800 (20.3)	1.498 (38.0)	1.140 (29.0)	1.848 (46.9)

TABLE V: CABLE ENTRY				
Dash No.	K Dia	L Dia	M Dia	
02	.125 (3.2)	.250 (6.4)	.312 (7.9)	
03	.188 (4.8)	.312 (7.9)	.375 (9.5)	
04	.250 (6.4)	.375 (9.5)	.438 (11.1)	
05	.312 (7.9)	.438 (11.1)	.500 (12.7)	
06	.375 (9.5)	.500 (12.7)	.562 (14.3)	
07	.438 (11.1)	.562 (14.3)	.625 (15.9)	
08	.500 (12.7)	.625 (15.9)	.688 (17.5)	
09	.562 (14.3)	.688 (17.5)	.750 (19.1)	
10	.625 (15.9)	.750 (19.1)	.812 (20.6)	
11	.688 (17.5)	.812 (20.6)	.875 (22.2)	
12	.750 (19.1)	.875 (22.2)	.938 (23.8)	
13	.812 (20.6)	.938 (23.8)	1.000 (25.4)	
14	.875 (22.2)	1.000 (25.4)	1.062 (27.0)	
15	.938 (23.8)	1.062 (27.0)	1.125 (28.6)	
16	1.000 (25.4)	1.125 (28.6)	1.188 (30.2)	
17	1.062 (27.0)	1.188 (30.2)	1.250 (31.8)	
18	1.125 (28.6)	1.250 (31.8)	1.312 (33.3)	
20	1.250 (31.8)	1.375 (34.9)	1.438 (36.5)	
22	1.375 (34.9)	1.500 (38.1)	1.562 (39.7)	
24	1.500 (38.1)	1.625 (41.3)	1.688 (42.9)	

1. When maximum cable entry (page 22) is exceeded, Style 2 will be supplied. (Function S only).
2. Metric dimensions (mm) are indicated in parentheses.
3. Consult factory for shorter lengths on straight backshells.
4. When using Connector Designator B refer to pages 18 and 19 for part number development.
5. Backshells supplied with 600-052-* band, see Glenair Series 600 Tool Catalog for installation.