

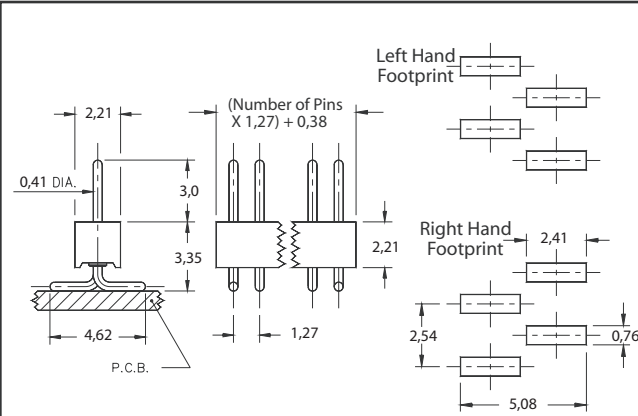


Fig. 1

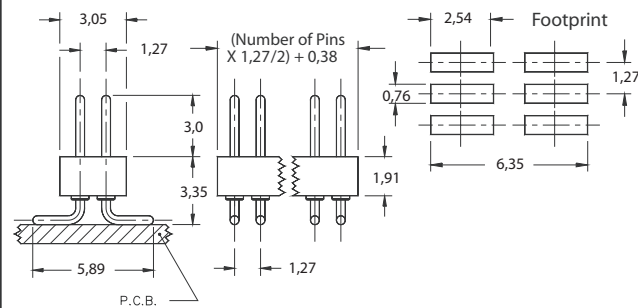


Fig. 2

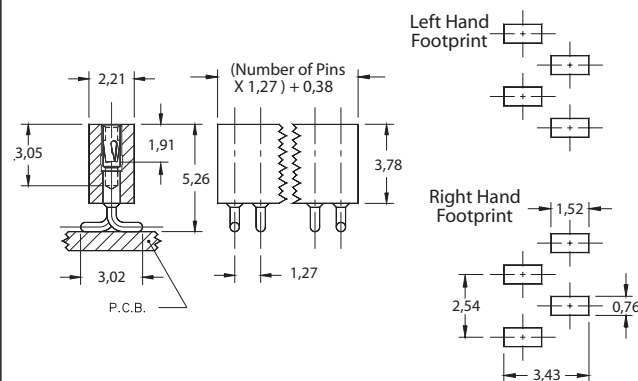


Fig. 3

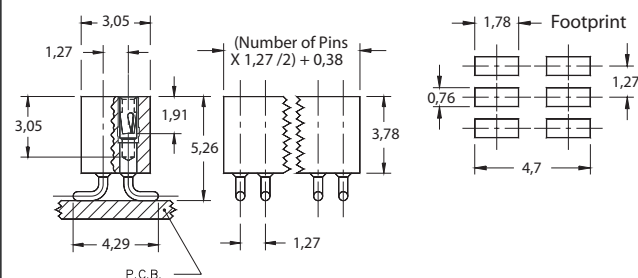


Fig. 4

- Series 850 and 851 interconnects are available in single and double row form.
- Single row interconnects having an even number of pins are now available with a left or right hand footprint.
- Headers (850 & 852) use MM# 4006 pins. (See page 166 for details)
- Sockets (851 & 853) use MM# 4890-0 receptacles and accept pin diameters from 0,38-0,53 (See page 129 for details)
- Insulators are high temp. thermoplastic.



Ordering Information

Fig. 1L	Single Row Header, Left Hand Footprint Odd or Even # of pins					
	850-XX-0_ _ -30-001000 Specify # of pins → 01-50					
Fig. 1R	Single Row Header, Right Hand Footprint Even # of pins					
	850-XX-0_ _ -30-002000 Specify even # of pins → 02-50					
Fig. 2	Double Row Header, Even # of pins					
	852-XX- _ _ -30-001000 Specify even # of pins → 002-100					
SPECIFY PLATING CODE XX=		10◇	90	40◇		
Pin Plating		0,25µm Au	5,08µm Sn/Pb	5,08µm Sn		
Fig. 3L	Single Row Socket, Left Hand Footprint Odd or Even # of pins					
	851-XX-0_ _ -30-001000 Specify # of pins → 01-50					
Fig. 3R	Single Row Socket, Right Hand Footprint Even # of pins					
	851-XX-0_ _ -30-002000 Specify even # of pins → 02-50					
Fig. 4	Double Row Socket, Even # of pins					
	853-XX- _ _ -30-001000 Specify even # of pins → 002-100					
SPECIFY PLATING CODE XX=		13◇	93	99	43◇	44◇
Sleeve (Pin)		0,25µm Au	5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn	5,08µm Sn
Contact (Clip)		0,76µm Au	0,76µm Au	5,08µm Sn/Pb	0,76µm Au	5,08µm Sn