

74-963
DRAWN
R. G. C. 9, MAR. '56
CHECK
G. G. H. 15 MAR. 56
6
WJM MAY 62
E CO 50566-B
I AUG 63
D WV 2 APR 59
C CO13507
B CO10771
A CO9600
REVISIONS
ISSUE 3
DRAWING NUMBER 7
M
22AT2-T
REPLACES (M)22AT2-T
ISSUE 2

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS


FED. MFR. CODE 91929

ASSEMBLY— TOGGLE SWITCH

CATALOG LISTING

22AT2-T



CONTRACT AF33(600)42664

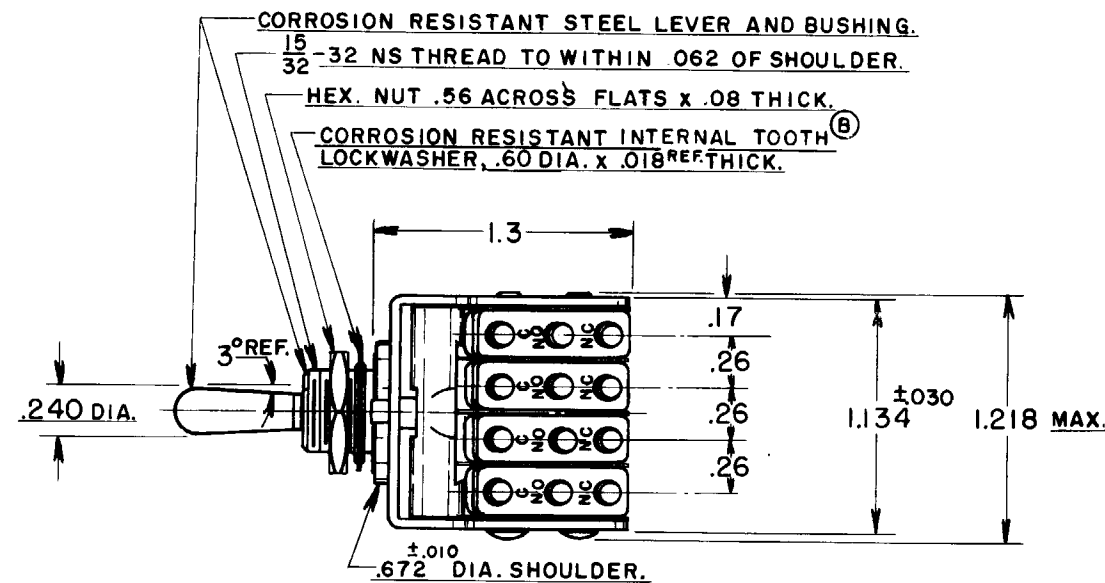

MTG. DETAIL

.125 DIA. HOLE .060 MIN. DEPTH, RECOMMENDED FOR SWITCH POSITIONING

PANEL DETAIL

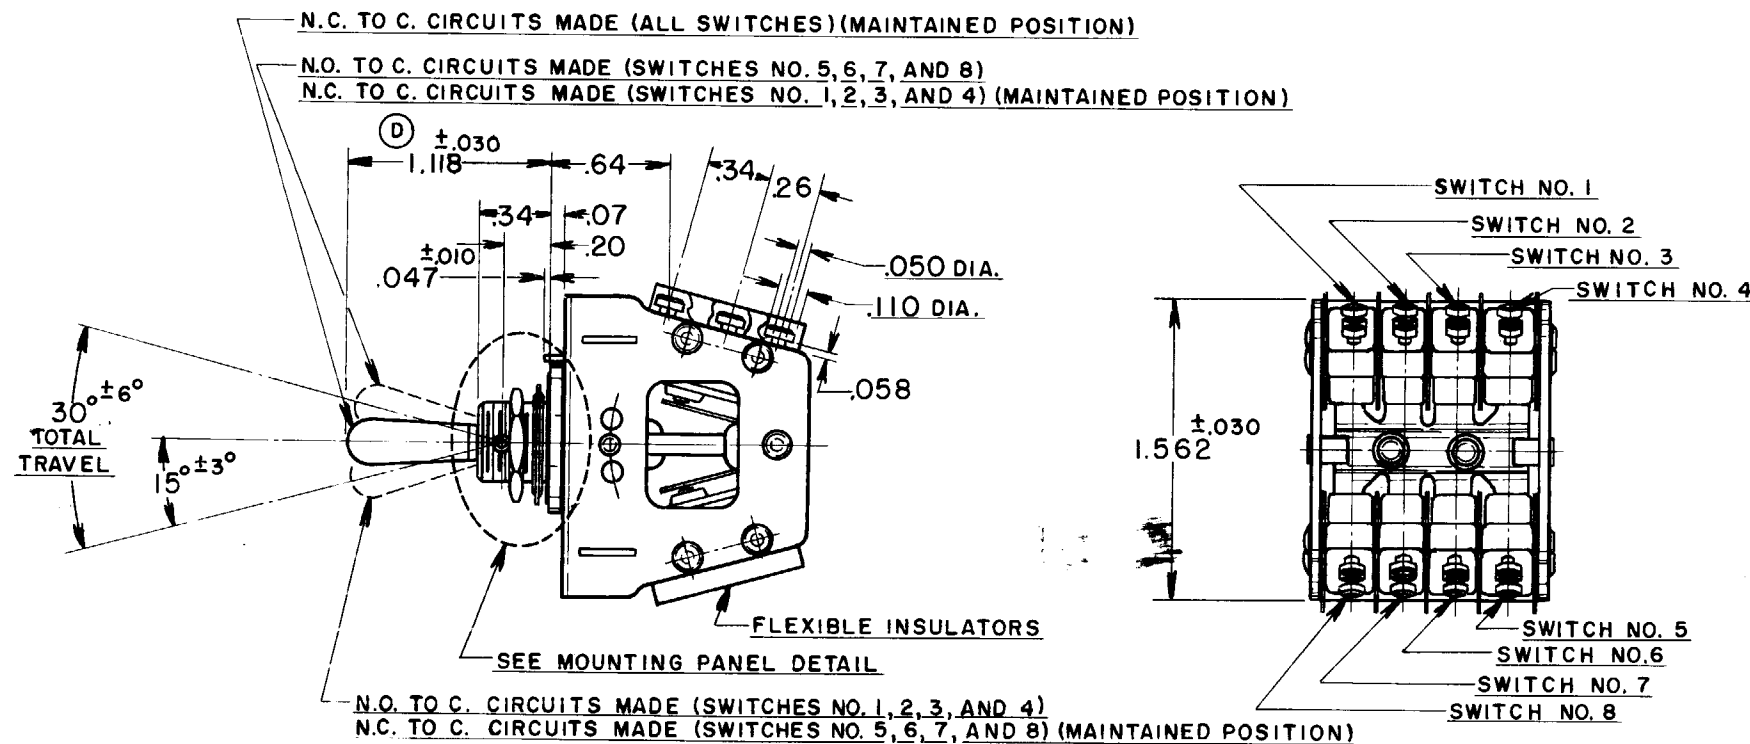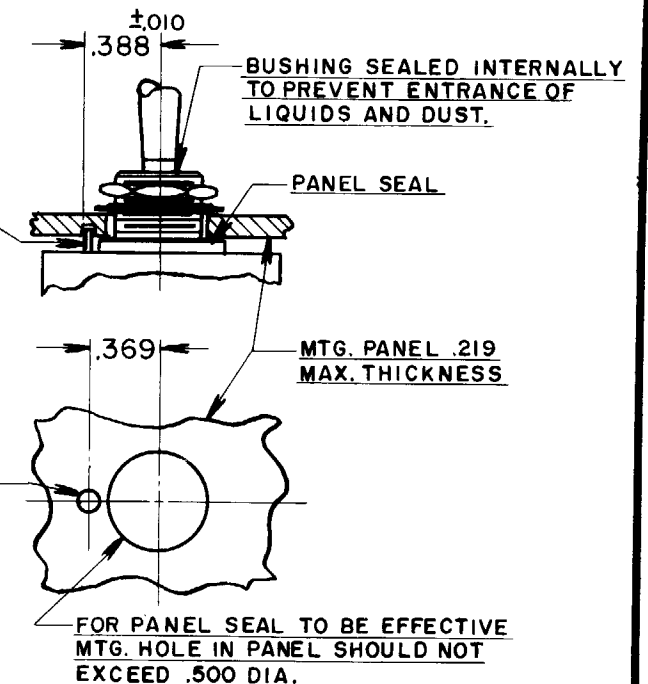

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT
(8) S. P. D. T.

250 VAC
30 VOLTS DC RATING

INDUCTIVE — SEA LEVEL — 3 AMP
50,000 FT. — 2.5 AMP

RESISTIVE — SEA LEVEL — 5 AMP
50,000 FT. — 5 AMP

MAXIMUM INRUSH — 24 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ± 1°

WEIGHT

NOTE —

- 1- SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY.
- 2- UNIT INCLUDES (8) CAT. LIST. 11SM1-T BASIC SWITCHES.
- 3- TERMINALS ARE PLATED FOR SOLDERING.