
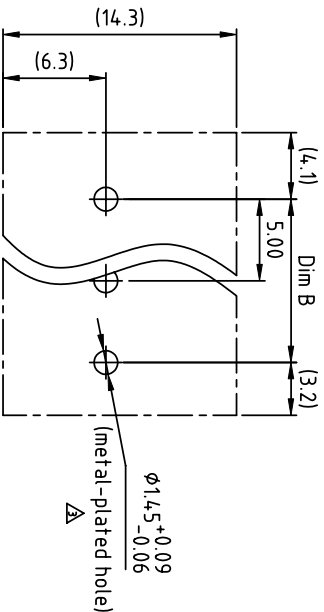
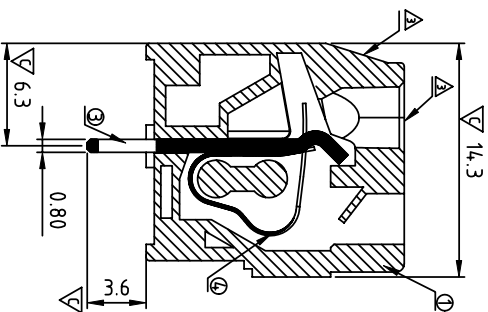
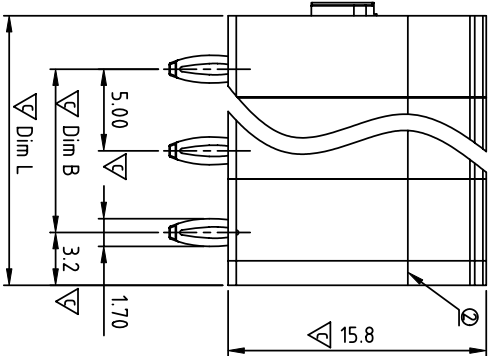


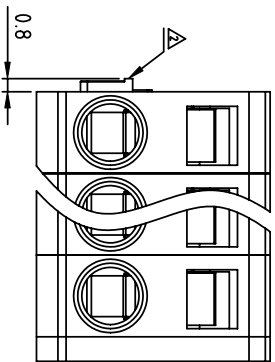

△ N = Number of poles

Dim L = N x 5.00 + 1.5
Dim B = (N - 1) x 5.00

POLES	Dim L	Dim B
1p	±0.1	±0.15
2p-6p	±0.2	±0.15
7p-12p	±0.3	±0.25
13p-18p	±0.4	±0.35
19p-24p	±0.45	±0.4

SIGN	DATE	DESCRIPTION	APPROVER
△	1/31/07	The soldering temperature from 245° to 250°	Aaron
△	05/28/13	change the structure	Da cheng
△	05/28/13	update the drawing	Da cheng
△			
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Insulator body: Thermoplastic (UL94V-0)
- Item ② Insulating cover: Thermoplastic (UL94V-0)
- Item ③ Contact pin: Brass, Tin plated
- Item ④ Wire guard: Stainless steel

Electrical:

- Voltage rating: 250V
- Current rating: 8A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 15KV
- Operating temperature: -40°C to +115°C
- Safety Approval:
- Critical dimension:

HM XX 70 x 1 XXXX G

No. OF POLES

01: 1 POLES

02: 2 POLES

24: 24 POLES

△ COLOR

0 Black (RAL9005)

2 Red (RAL3001/D)

3 Orange(RAL2011/P)

4 Yellow(RAL1018/A)

5 Green(RAL6018/T)

6 Blue (RAL5015/A)

8 Grey(RAL7004/P)

9 White(RAL1102)

C Multiple colors

0000 Standard @ Logo

000A Standard ANY Logo

Any special item by customer request, please contact sales department.

△ RoHS compliant (lead<4%) In copper Alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	HM 5.0mm Series Press fit Type	DWG NO.	8HM0002	Tolerance	X: ±0.50 X.X: ±0.30 X.XX: ±0.10 X*: ±1°
PART NO.	HMxx70x1xxxxG	CUST NO.		UNIT:	mm
APPROVED	CHECKED	DESIGNED	DRAWN	SCALE:	NONE
	Da cheng 2013.05.28	Da cheng 2013.05.28		REV:	F
				SHEET:	01/01