

SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- Material:
- Item 1 Terminal housing:Thermoplastic (UL 94V-0)
 - Item 2 Clamp: Brass ,Ni plated
 - Item 3 Wire guard solder pin : Brass ,Tin plated
 - Item 4 Terminal screw: Steel, Zinc plating"- "slot type

- Electrical cULus
- Voltage rating: 300VAC
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 12-22
 - Stranded wire(AWG): 12-22
 - Torque(Lb-In): 3.5
 - Screw: M2.5
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval: 

TI xx 4 1 x A xxxx G

No. OF POLES ————

02: 2 POLES

.....

16: 16 POLES

COLOR ————

0: BLACK

5: GREEN (RAL 6018/T)

6: BLUE

8: GREY (RAL 7035/D)

G: Pb<40000ppm

0000: "@ " Logo (Standard)



000A: "ANYTEK" Mark

Any special item by customer request. please contact sales department.



N = Number of poles

DIM A	N×7.62
DIM B	(N-1)×7.62

2p-6p	±0.15
7p-12p	±0.25
13p-16p	±0.35

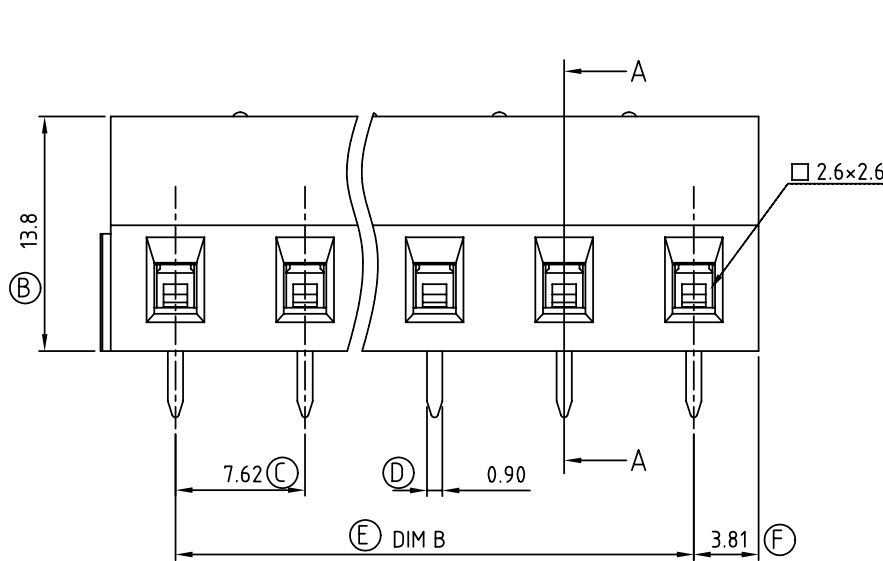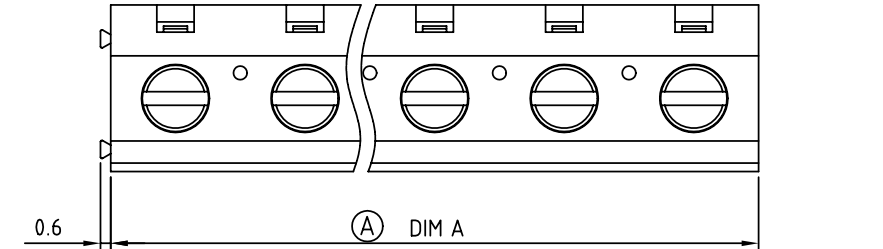

N=Number of contacts

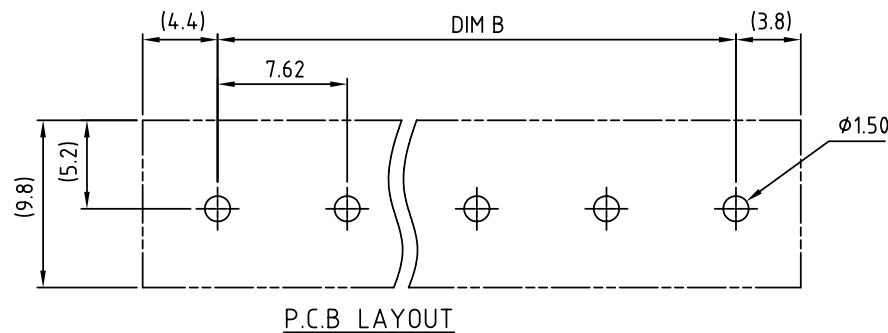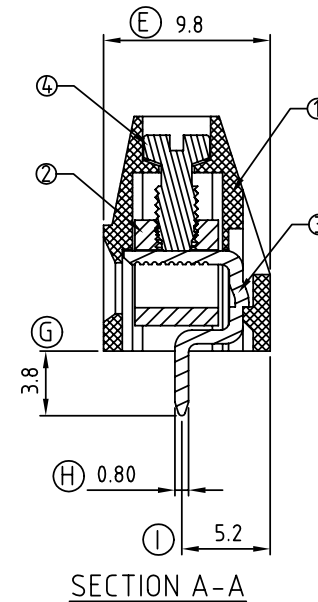

ANYTEK					CUSTOMER COPY						
					ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD						
TITLE		TI 7.62 SERIES 2P-16P									
PART NO.		Tlxx41xAxxxxG			DWG NO.		8TI0401				
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance				
			Aaron 2009.06.26	Aaron 2009.06.26			UNIT: mm		X.	±0.50	
							SCALE: NONE		X.X	±0.30	
					SHEET: 01/01		REV.: B		X.XX		±0.10
									X°		±1°
5				6				7			