

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

MINNEAPOLIS, MINN.

FED. MFR. CODE 91929

ASSEMBLY -
TOGGLE SWITCH

CATALOG LISTING


15AT61

M 15AT61

DRAWING
NUMBERISSUE
7



REVISIONS

A	CORR	27 JUL 63
B	MADE ETS	29 NOV 63
C	SRI2410	15 AUG 66
D	CO 48043	14 JUL 80
E	CO59602	8 AUG 86
F	CO60089	8 AUG 86
G	CO60089	0003488
H	TRF 26FEB04	

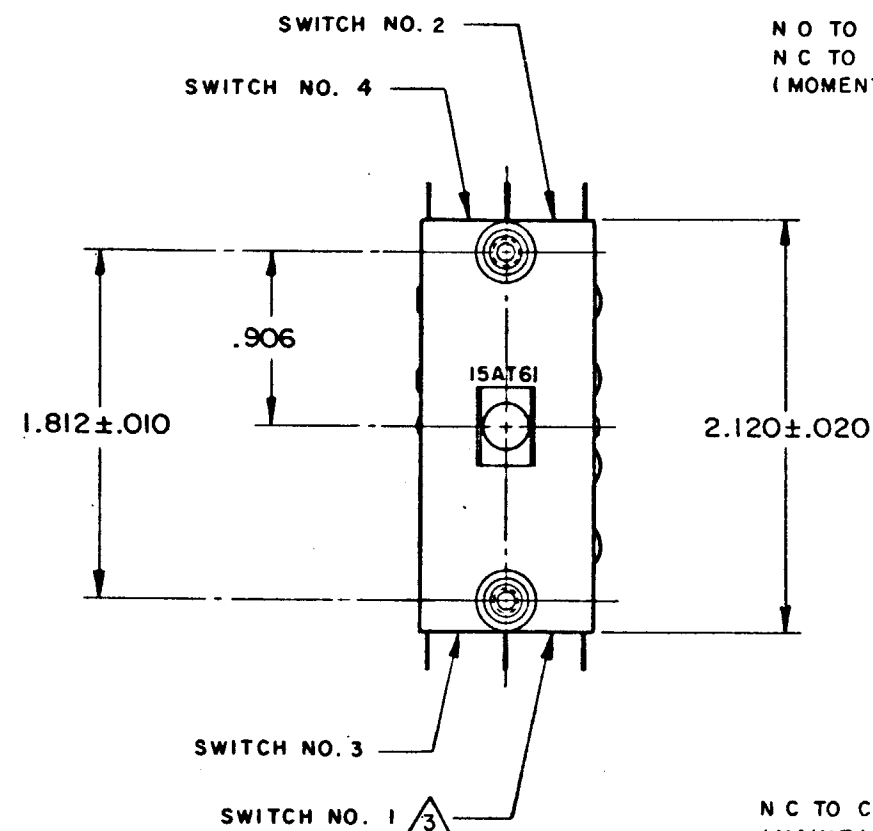

N O TO C CIRCUIT MADE (SWITCHES NO. 1 & 3)
N C TO C CIRCUIT MADE (SWITCHES NO. 2 & 4)
(MOMENTARY POSITION)

N C TO C CIRCUITS MADE (ALL SWITCHES)
(MAINTAINED POSITION)

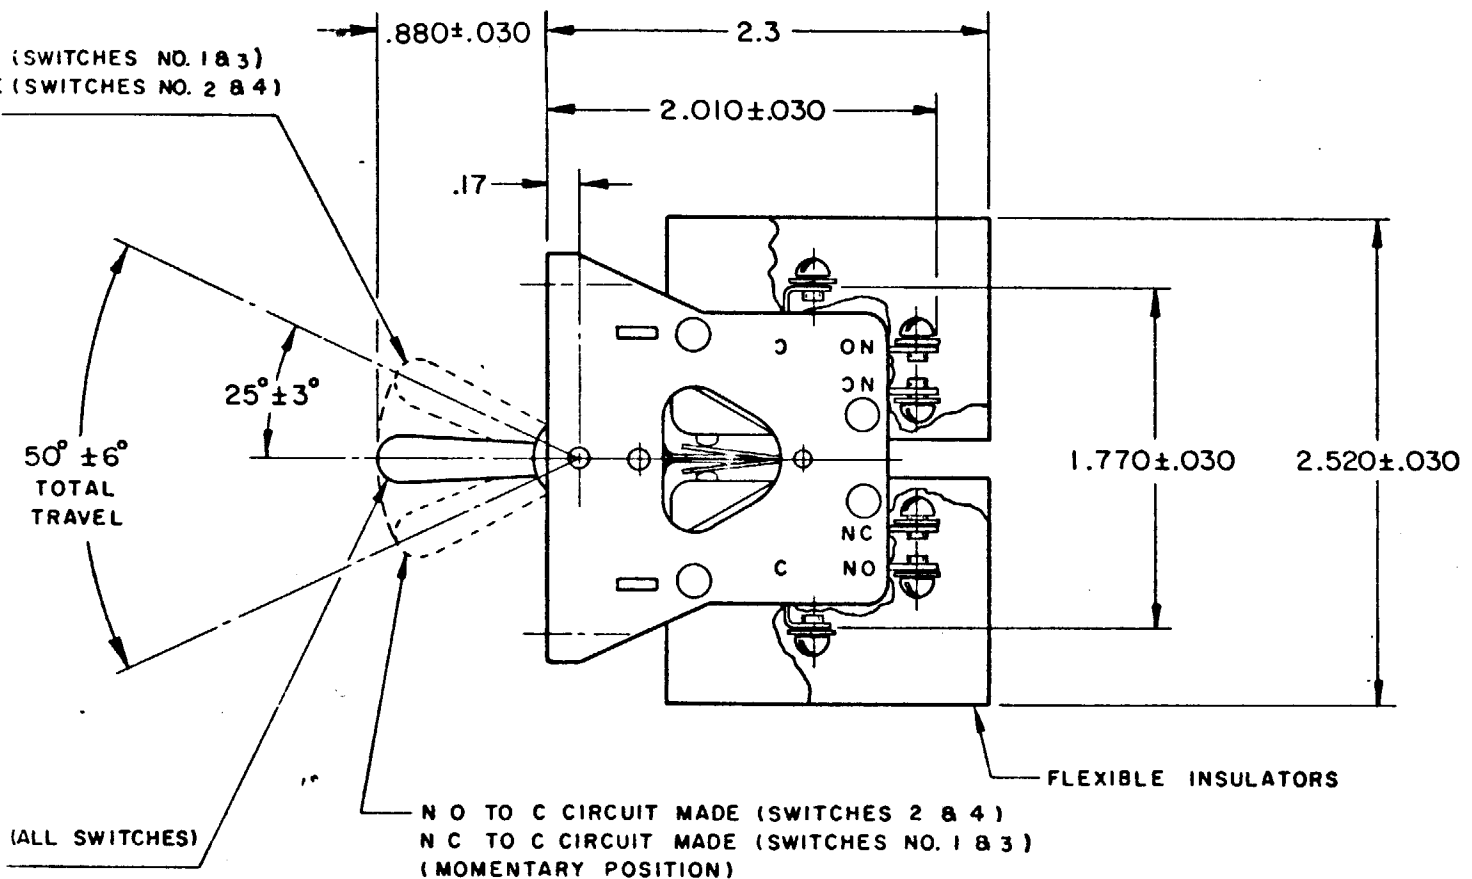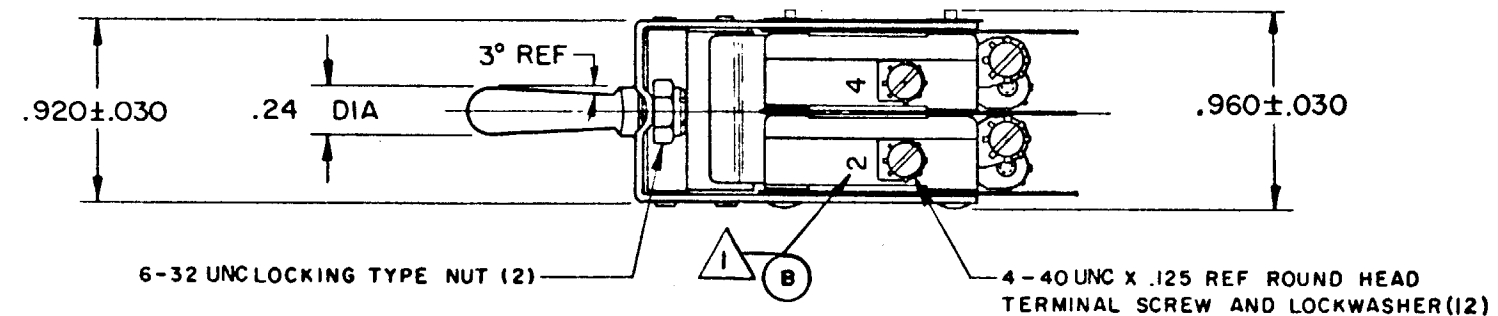

NOTE -

- 1 - BASIC SWITCH NO. INK STAMPED ON EACH BASIC SWITCH AND COVERED WITH CLEAR LACQUER
- 2 - UNIT INCLUDES CAT. LIST. V3-201 (3) AND CAT. LIST. V3-1375 (1) BASIC SWITCHES
- 3 - CONTACT MATERIAL - GOLD ALLOY
- 4 - SWITCHES DO NOT OPERATE SIMULTANEOUSLY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - 3-8 LBS

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (4)SWITCH NO. 1
28 VDCINDUCTIVE - 1/2 AMP
RESISTIVE - 1 AMP

SWITCHES NO. 2, 3, 4

15 A - 1/3 HP - 125 OR 250 VAC

1/2 A - 125 VDC; 1/4 A - 250 VDC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHESTOLERANCES ARE:
ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .26 LB APPROX

RASTER

FO-80378-003

DRAWN

L E B 26 APR 63

CHECK

D W

29 APR 63

CHECK

B R J

29 APR 63

CHECK

B R J

29 APR 63

CHECK

B R J

29 APR 63

CHECK

B R J

29 APR 63

CHECK

B R J

29 APR 63

CHECK

B R J

29 APR 63

CHECK

B R J

29 APR 63

CHECK

B R J