



P.C.B. LAYOUT

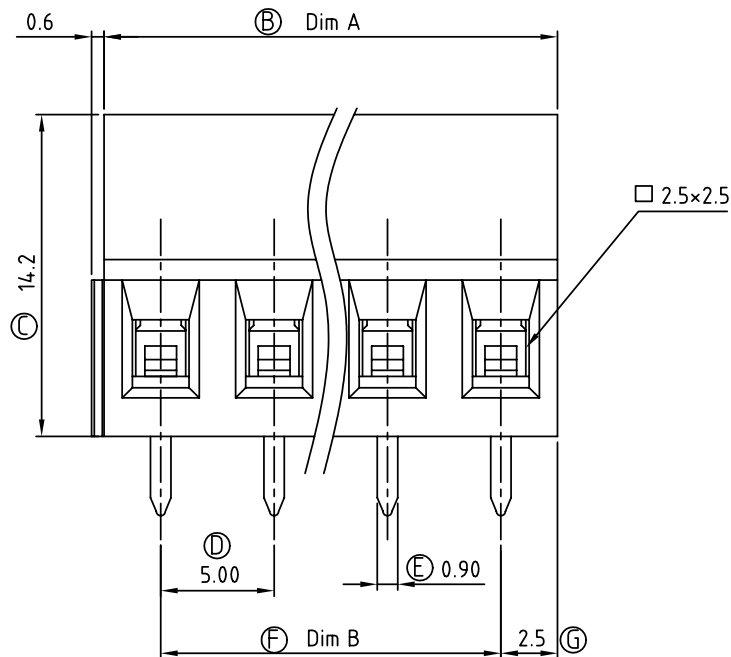

N=Number of conacts

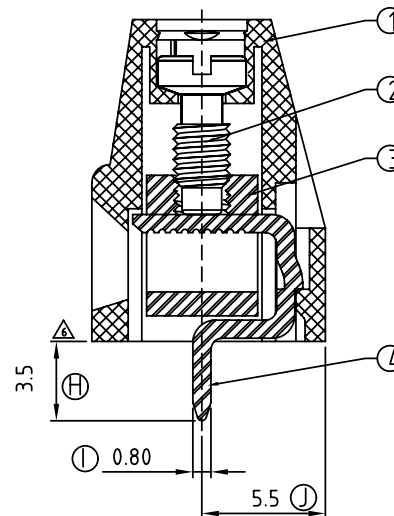


SECTION A-A

SIGN	DATE	DESCRIPTION	APPROVER
△	6/22'06	Removed Safety Approval UL Mark	Marvin
△	10/9'06	Modify Connector Solid Block Type Series	Aaron
△	09/17'09	Torque is changed from 2.6(Lb-In) to 3.5(Lb-In)	Aaron
△	09/17'09	Operating temperature is changed	Aaron
△	09/17'09	Poles is changed from 2p-24p to 4p-24p	Aaron
△	09/26'09	Dimension is changed from 3.80mm to 3.50mm	Aaron
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

### Material

- Ltem 1 Terminal housing: Thermoplastic ( UL94V-0 )
- Ltem 2 Terminal screw: Steel Zinc plating "-" slot type
- Ltem 3 Clamp: Brass, Ni plated
- Ltem 4 Wire guard solder pin: Brass , Tin plated

### △ Electrical UL

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
  - Solid wire(AWG): 12-22
  - Stranded wire(AWG): 12-22
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

TI xx 01 x A xxxx G

△ 04 4 CONTACTS	0 Black	0000 Standard @ Logo	RoHS
05 5 CONTACTS	4 Orange	000A Standard ANY Logo	Pb<40,000ppm
...	5 Green	Any special item by	
24 24 CONTACTS	6 Blue	customer request,	
	8 Grey	please contact sales	
		department.	

POLE		2	3	4	5	6	7	8	9	10	11	12
Dim A				20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
Dim B				15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00
Tol.	±0.15						±0.20					
POLE	13	14	15	16	17	18	19	20	21	22	23	24
Dim A	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00
Dim B	60.00	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00
Tol.	±0.30						±0.40					

# ANYTEK

## CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TI 5.0 Series 4P-24PSolid block ( 2-intertlock )										
PART NO.	TIxx01xAxxxxG					DWG NO.	8TI0201				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance			
		Aaron	Aaron					X.	±0.50		
		2009.09.26	2009.09.26					X.X	±0.30		
								X.XX	±0.10		
								X°	±1°		
								SHEET: 01/01	REV.: F		