

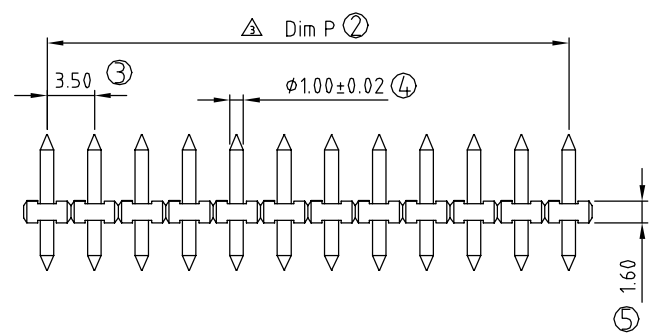


SIGN	DATE	DESCRIPTION	APPROVER
△	02/07'06	Part No. changed	Tony
△	1/31'07	Soldering temperature changed from 245° to 250°	Tony
△	04/18'11	Dimension is changed	Aaron

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

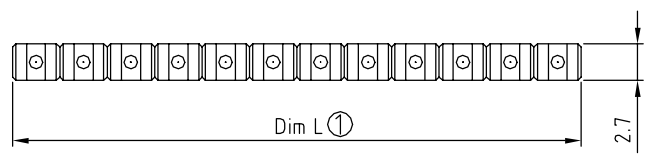

P.C.B. LAYOUT

- Material:
- Item ⑥ Terminal(housing): PA66(UL94V-0)
 - Item ⑦ Contact pin: Brass
- Electrical: cULus
- Voltage rating: 150V
 - Current rating: 10A
 - Withstanding Voltage: 1.3KV
 - Operating temperature: -40°C to +115°C
 - △ ● Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval:
 - △ ● Part No.:

OP xx 2 B x 0 xxxx G

POLES ————

02 pole

 24 pole

G: Pb<40000ppm

0000: Standard
 Any special item by
 customer request.
 please contact sales
 department.

0 Tin
 1 Gold plating 10u"
 2 Gold flash

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00	45.50
Dim P	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00
TOL	±0.10				±0.15				±0.20			
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	84.00	
Dim P	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	
TOL	±0.25				±0.30							

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OP 3.5 Series (配EH専用)			DWG NO.	80P0501	
PART NO.	OPxx2Bx0xxxxG			DWG NO.	80P0501		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Aaron 2011.04.18	Tony 2007.01.31				
					UNIT: mm	X. ±0.50	
					SCALE: NONE	X.X ±0.30	
				SHEET: 01/01	REV.: E	X° ±1°	