


# Actuator

45-  
2J31.26T0.000

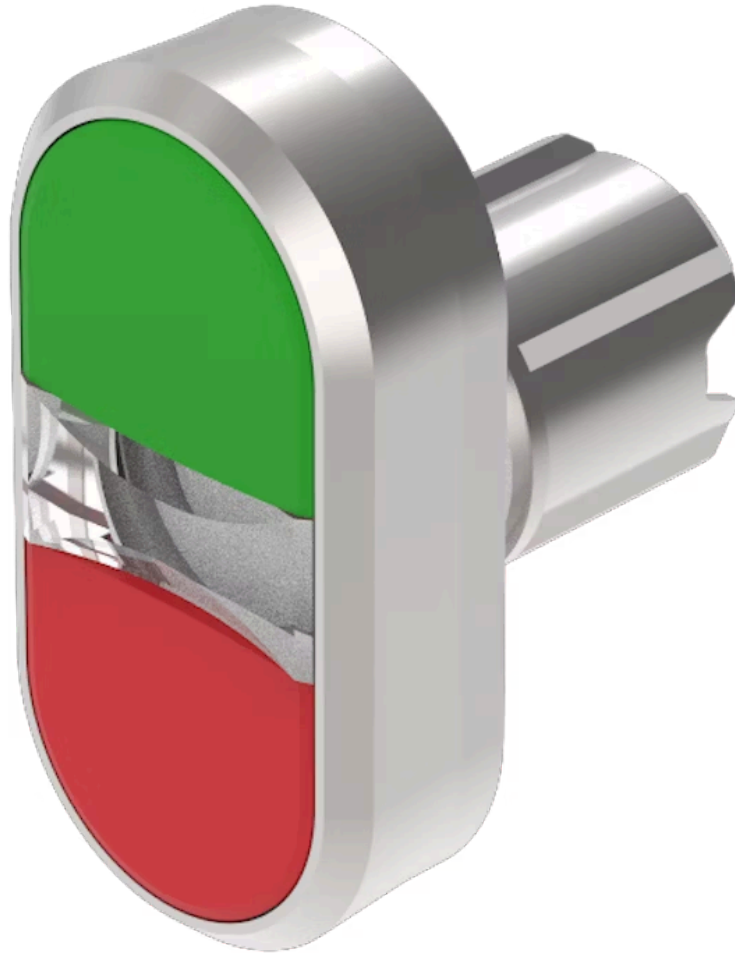

<https://eao.com/p/45-2J31.26T0.000>

Your product:

---



## 45-2J31.26T0.000 Actuator

### FRONT

<b>Front dimension:</b>	58 mm x 35 mm
<b>Front bezel colour:</b>	Silver
<b>Front bezel material:</b>	Metal

### MOUNTING

<b>Design:</b>	raised
----------------	--------

### OPERATING-/INDICATION PART

<b>Lens illumination:</b>	non illuminative
<b>Lens colour:</b>	Green-red
<b>Lens shape:</b>	flush
<b>Lens material:</b>	Plastic
<b>Lens optics:</b>	opaque

### MECHANICAL CHARACTERISTIC

<b>Weight:</b>	0.068 kg
<b>Switching action:</b>	Momentary
<b>Switching system:</b>	Slow-make switching element
<b>Mechanical lifetime:</b>	2 Mio. cycles of operation
<b>Operating frequency:</b>	Max. 3 600/h


### AMBIENT CONDITION

<b>IP front protection:</b>	IP66, IP67, IP69K
<b>Operating temperature:</b>	- 25 °C ... + 70 °C
<b>Storage temperature:</b>	- 40 °C ... + 80 °C
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6, 3B2
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 10 ... 500 Hz: 5 g

**OTHER**


<b>Housing colour:</b>	Silver
<b>Housing material:</b>	Metal
<b>Short Description:</b>	Actuator, 58 mm x 35 mm, flush, non illuminative, Green-red, Plastic, opaque, Silver, Metal, Momentary, IP66, IP67, IP69K

**Component layouts:**

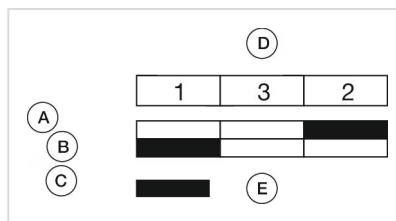


- A = Switching action
- B = green (white) button pressed
- C = red (black) button pressed
- D = Arrangement switching element corresponds to designation of front adaptor
- E = Switching element actuated

**Mounting cut-outs:**

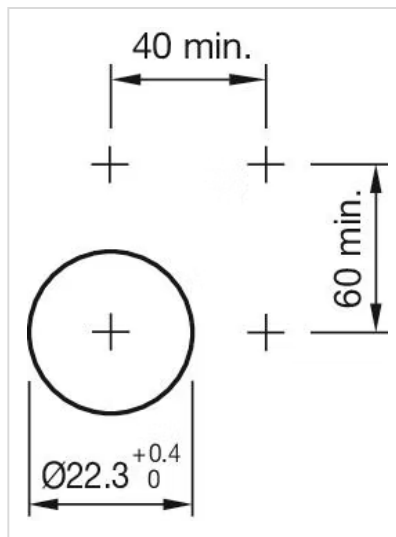

**Wiring diagrams:**

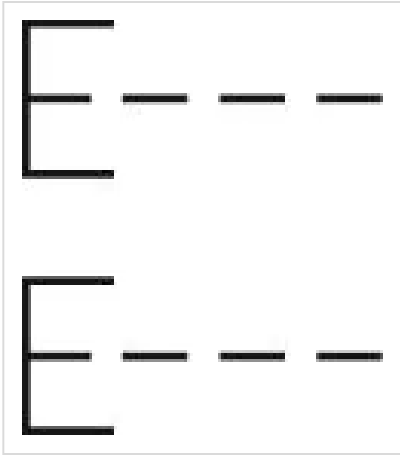

Dimension drawings:

