

## SUMMARY

### # Wires

Low voltage 16



*Image is for illustrative purpose only*

Series	2P
Termination type	Female crimp
IP rating	50
AWG wire size	30.00 - 22.00
Cable Ø	0.00 - 0.00 mm
Status	active
Matching parts	<a href="#">CAB.M16.GYZ.C72G</a>

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	CK*: Fixed receptacle with two nuts (back panel mounting)
Keying	3 keys (alpha=0, gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), gray
Weight	7.98 g

### Performance

Configuration	2P.M16 : 16 Low V.
Insulator	Y: PEEK for crimp contacts
Rated Current	6 Amps

### Specifications

Test voltage (kV rms) Contact-contact: 1.5  
 Air clearance min.: 0.8 mm  
 Creepage distance min.: 0.8 mm


### Others

Endurance (Shell): >1000 mating cycles  
 Temp (min / max): -50°C / +150°C  
 F ret (min): 150 N

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

F ret (max): 250 N  
Steam sterilization: 20 times

# DRAWINGS

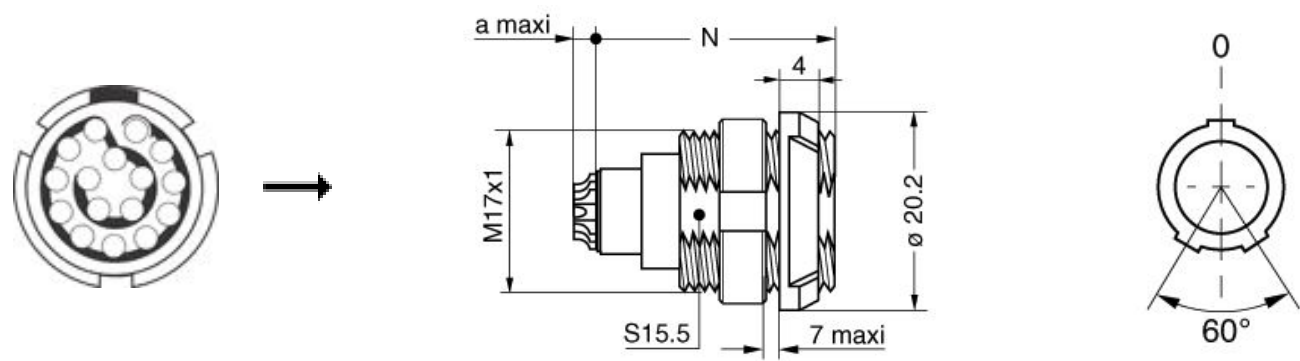

## Dimensions

	N	a
mm.	25.1	0
in.	0,99	0,00

# RECOMMENDED BY LEMO

## Tools

- Crimp Tool: [DPC.91.701.V](#)
- Crimp settings: AWG/Selector = 22-24-26/6-5-5
- Positionner: [DCE.91.072.BVM](#)
- Extractor: [DCF.91.070.2LT](#)
- Replacement contact: EGG.2B.655.ZZM

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.