




PE Bag




Pin Assignments

Front View

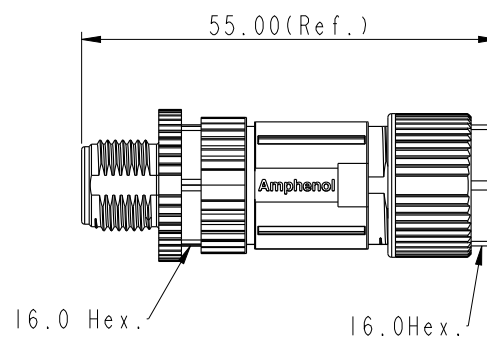

UNIT: mm



TOLERANCE

TOLERANCE	
.X	± 0.25

.XX	±0.1
XXX	±0.05

.XXX	± 0.05
ANGLES	$\pm 1^\circ$

TITLE

MI2 Shielded Assy
4PIN M Conn. M Pin

SCALE

Free

SIZE

A 4

SHEET

OF 2

ection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DESCRIPTION	QTY	UNIT	AMOUNT
1	...	...	...	...
2	...	...	...	...
3	...	...	...	...
4	...	...	...	...
5	...	...	...	...
6	...	...	...	...
7	...	...	...	...
8	...	...	...	...
9	...	...	...	...
10	...	...	...	...
11	...	...	...	...
12	...	...	...	...
13	...	...	...	...
14	...	...	...	...
15	...	...	...	...
16	...	...	...	...
17	...	...	...	...
18	...	...	...	...
19	...	...	...	...
20	...	...	...	...
21	...	...	...	...
22	...	...	...	...
23	...	...	...	...
24	...	...	...	...
25	...	...	...	...
26	...	...	...	...
27	...	...	...	...
28	...	...	...	...
29	...	...	...	...
30	...	...	...	...
31	...	...	...	...
32	...	...	...	...
33	...	...	...	...
34	...	...	...	...
35	...	...	...	...
36	...	...	...	...
37	...	...	...	...
38	...	...	...	...
39	...	...	...	...
40	...	...	...	...
41	...	...	...	...
42	...	...	...	...
43	...	...	...	...
44	...	...	...	...
45	...	...	...	...
46	...	...	...	...
47	...	...	...	...
48	...	...	...	...
49	...	...	...	...
50	...	...	...	...
51	...	...	...	...
52	...	...	...	...
53	...	...	...	...
54	...	...	...	...
55	...	...	...	...
56	...	...	...	...
57	...	...	...	...
58	...	...	...	...
59	...	...	...	...
60	...	...	...	...
61	...	...	...	...
62	...	...	...	...
63	...	...	...	...
64	...	...	...	...
65	...	...	...	...
66	...	...	...	...
67	...	...	...	...
68	...	...	...	...
69	...	...	...	...
70	...	...	...	...
71	...	...	...	...
72	...	...	...	...
73	...	...	...	...
74	...	...	...	...
75	...	...	...	...
76	...	...	...	...
77	...	...	...	...
78	...	...	...	...
79	...	...	...	...
80	...	...	...	...
81	...	...	...	...
82	...	...	...	...
83	...	...	...	...
84	...	...	...	...
85	...	...	...	...
86	...	...	...	...
87	...	...	...	...
88	...	...	...	...
89	...	...	...	...
90	...	...	...	...
91	...	...	...	...
92	...	...	...	...
93	...	...	...	...
94	...	...	...	...
95	...	...	...	...
96	...	...	...	...
97	...	...	...	...
98	...	...	...	...
99	...	...	...	...
100	...	...	...	...

MSDS-04BMMC-SL700I

DWG NO	
--------	--

MSDS-04BMMC-SL700I

CUSTOMER	
----------	--

ALTW

	DRAWN BY
--	----------

Xiaofeng

	CHECKED
--	---------

Li-Feng

	APPROVED BY
--	-------------

Jerry

	DATE
--	------

2019/06/18

	DATE
--	------

2019/06/18

	DATE
--	------

2019/06/18

1		2		3		4		5		6		7		8			
F E D C B A				REV.	ECN NO.	DATE	SIGN	DESCRIPTION									
				M SDS - XX B M M C - S L 7 001													
SDS: D-Code Shielded				001: Without Cable													
04: 4Pin				7: IP67(防水等級67)													
				L: Straight(180°)													
B: Without S/R(無網尾)				S: Screw(螺紋式)													
M: Male Connector(公座)				C: Screw in Type(組裝式)													
M: Male Pin(公Pin)																	
				Note: * IP: IP67. * Housing: Nylon, Black. * Clamp Cage: Metal * Male Pin: Copper Alloy, Gold Plated. * O-Ring: Silicone, Grey. * Clamp Ring: Zinc Alloy, Nickel Plated. * Sealing Nut: Zinc Alloy, Nickel Plated. * Seal For Cable OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.5\text{mm}$ * Applicable Wire gauge (Stranded wire cross section) 20AWG-24AWG * Mating Recommended tightening torque: 3~4 kgf.cm / 0.29~0.39 N.m * Sealing-Nut Recommended tightening torque: 4~6 kgf.cm / 0.39~0.59 N.m * Detailed applicable wire specifications may vary depending on the actual wire construction.													
UNIT:mm				TITLE M12 Shielded Assy 4PIN M Conn. M Pin				Amphenol LTW 安費諾亮泰企業股份有限公司				ITEM NO MSDS-04BMMC-SL7001		DRAWN BY Xiaofeng		DATE 2019/06/18	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1		SIZE A4		SHEET 2 OF 2						DWG NO MSDS-04BMMC-SL7001		CHECKED BY Feng-Li		DATE 2019/06/18	
		REV. A		WC-REV. .0		QC: Inspection item						CUSTOMER ALTW		APPROVED BY Jerry		DATE 2019/06/18	
1		2		3		4		5		6		7		8			

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.