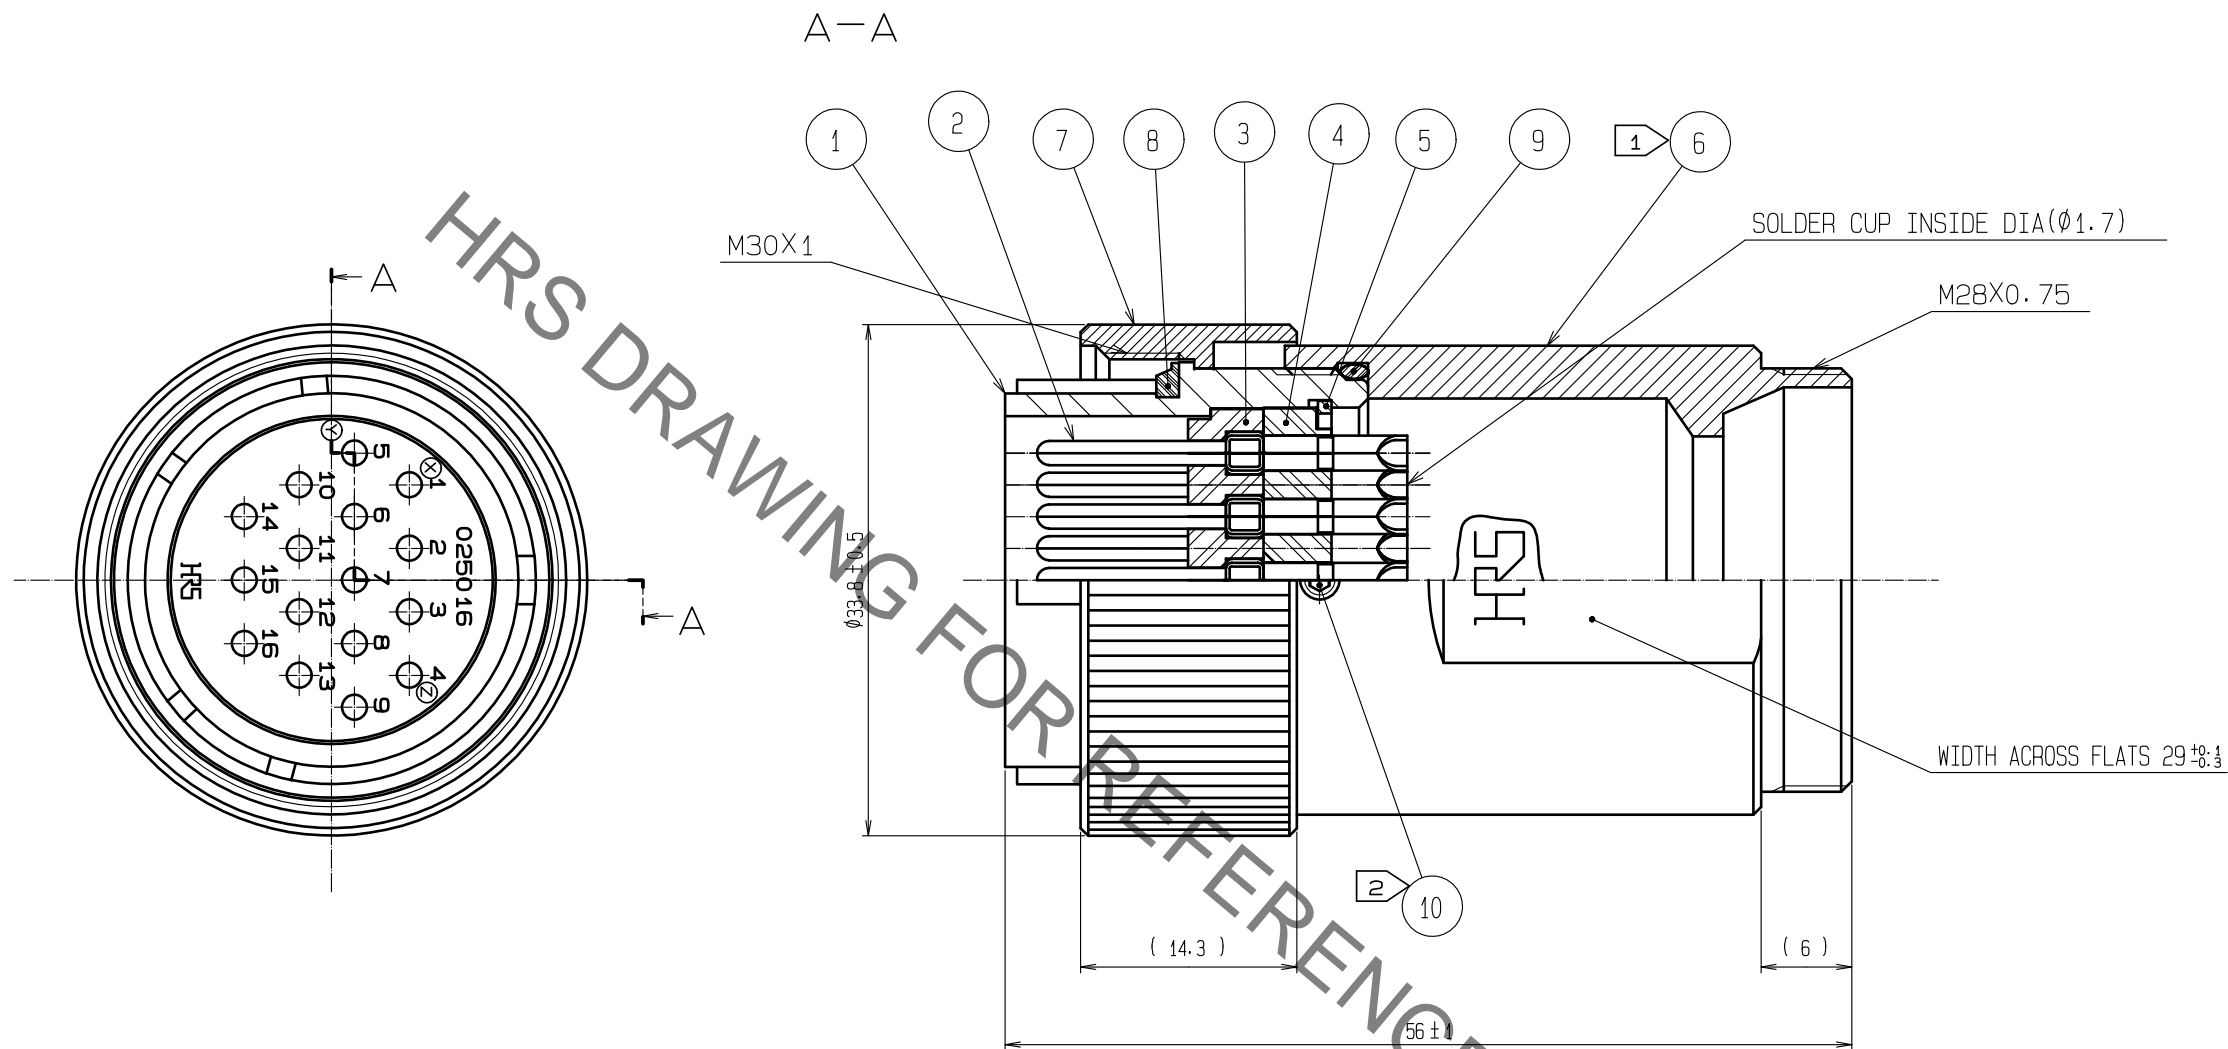






Dec.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- NOTES
- 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ TO BE 2 TO 2.5 N·m.
 - 2 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑩ TO BE 0.2 TO 0.25 N·m.
 - 3 ROTATION EXAMPLES OF REF. NOS. ① AND ⑥ ARE SHOWN.
 - 4 SCREW OF REF.NO. ①, ⑥, ⑧, LOCTITE 263, OR EQUIVALENT, LOCTITE JAPAN IS RECOMMENDED TO PREVENT FROM LOOSENING.
 - 5 THIS PRODUCT TO BE USED WITH CABLECLAMP, JR25WCC-*.
* DESIGNATE DIAMETER OF APPLICABLE CABLE.

5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL					
4	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	9	NBR	(GRAY)				
3	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	8	NBR	(GRAY)				
2	COPPER ALLOY	SILVER PLATING 3μm min.	7	BRASS	BLACK CHROME PLATING				
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING				
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED	: HY. KOBAYASHI		18. 02. 26	DRAWING NO.	EDC-110567-31-00		
		CHECKED	: HY. KOBAYASHI		18. 02. 26	PART NO.	JR25WP-16P(31)		
		DESIGNED	: TH. KAMEYA		18. 02. 22	CODE NO.	CL114-2010-6-31		
		DRAWN	: TH. KAMEYA		18. 02. 22				
							1/1		