



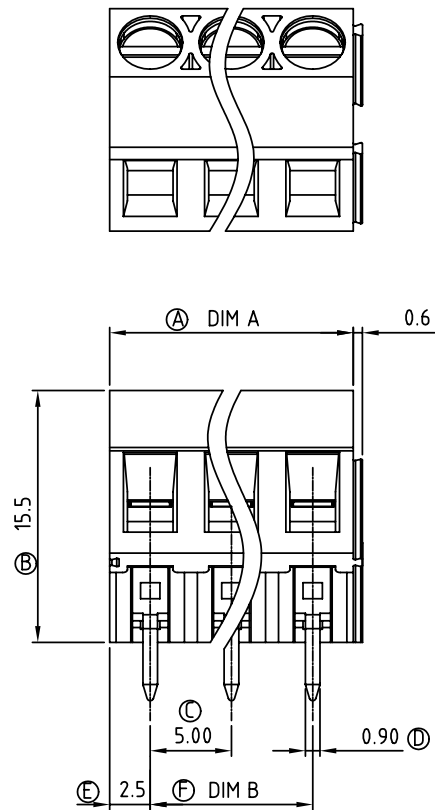

N=Number of contacts

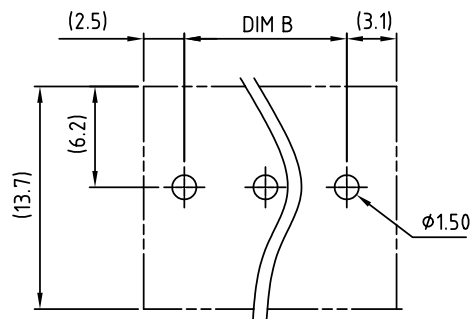


RECOMMENDED PCB LAYOUT

Dimension A&B

DIM A	N×5.0
DIM B	(N-1)×5.0

N=Number of contacts

Poles	A&B Tolerance
4P-8P	±0.15
9P-14P	±0.25
15P-20P	±0.35
21P-24P	±0.40

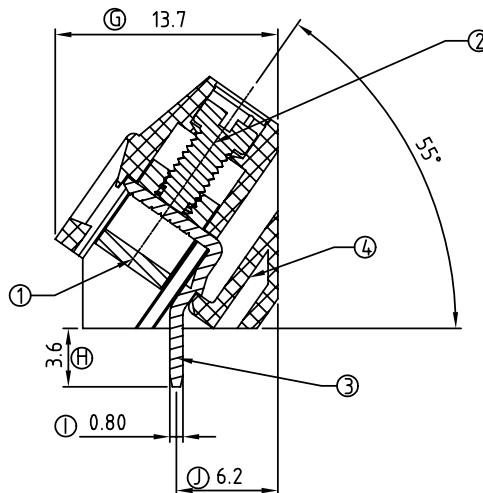

SIGN	DATE	DESCRIPTION	APPROVER
△	2/10 '06	Part NO is Changed	xionghaitao
△	01/12 '07	Soldering temperature changed from 245° to 250°	Tason

Material

- Item① Clamp : Brass , Ni plated
- Item② Terminal screw: Steel , Zinc plating “-” slot type
- Item③ Wire guard solder pin : Brass , Tin plated
- Item④ Terminal housing : Thermoplastic (UL94V-0)

Electrical UL

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval Deta:

△ T2 xx 01 x 1 xxxx G

04	4 CONTACTS	0	Black	0000:"@Logo (Standard)	RoHS
05	5 CONTACTS	5	Green	000A:"ANYTEK"Logo	Pb<40,000ppm
...	...		(RAL 6018/T)	Any special item by	
24	24 CONTACTS	6	Blue	customer request,	
		8	Grey	please contact sales	
			(RAL 7035/D)	department.	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN PERMISSION FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	T2 - 5.0mm series 4P-24P (Solid Block)				DWG NO.	8T20101	
PART NO.	T2xx01x1xxxxG				CUST NO.		
APPROVED	CHECKED	DESIGNED	DRAWN			Tolerance	
		Aaron 2009.11.14	xionghaitao 2006.01.23			UNIT: mm	X. ±0.50
						SCALE: NONE	X.X ±0.30
						X° ±0.10	X° ±1°
						SHEET: 01/01	REV.: E