
High Sensitive Digital-Latching Hall Effect Sensor

FEATURES

- Ultra-high sensitivity
- High chopping frequency
- Supports a wide voltage range
2.5V ~18V
- Wide operating temperature range
-40°C~150°C
- Solid-state reliability
- Small package
 - 3-pin SIP -(UA)
 - 3-pin SOT23 -(SO)
 - 6-pin DFN1616 -(DN)

APPLICATIONS

- Power tools
- Flow meters
- Valve and solenoid status
- BLDC motors with sensors
- Proximity sensing
- Tachometers

DESCRIPTION

The SC2402 is a Hall-effect latch designed in mixed signal Bi-CMOS technology. The device integrates a voltage regulator, Hall sensor with dynamic offset cancellation system, Schmitt trigger and an open-drain output driver, all in a single package.

The low operating voltage and extended choice of temperature range make it suitable for use in automotive, industrial and consumer low voltage applications.

An onboard regulator permits with supply voltages of 2.5V to 18V which makes the device suitable for a wide range of consumer 、 industrial and automotive applications


These devices are available in a 3-pin SIP package (UA) 、 a 3-pin SOT-23 package (SO) And a 6-pin DFN1616 package (DN) . Both packages are lead (Pb) free, with 100% matte tin lead frame plating.



CONTENTS

FEATURES	- 1 -	<i>Electrical Characteristics</i>	- 6 -
APPLICATIONS	- 1 -	<i>Magnetic Characteristics</i>	- 6 -
DESCRIPTION	- 1 -	TYPICAL CHARACTERISTIC	- 7 -
BLOCK DIAGRAM	- 3 -	TYPICAL CHARACTERISTIC (Continued)	- 8 -
ORDERING INFORMATION	- 3 -	FUNCTION DESCRIPTION	- 9 -
TERMINAL CONFIGURATION	- 4 -	<i>Field Direction Definition</i>	- 9 -
ABSOLUTE MAXIMUM RATINGS	- 5 -	<i>Transfer Function</i>	- 10 -
ESD PROTECTION	- 5 -	TYPICAL APPLICATION	- 11 -
THERMAL CHARACTERISTICS	- 5 -	PACKAGE INFORMATION “UA”	- 12 -
OPERATING CHARACTERISTICS	- 6 -	PACKAGE INFORMATION “SO”	- 13 -
		REVISION HISTORY	- 15 -


BLOCK DIAGRAM

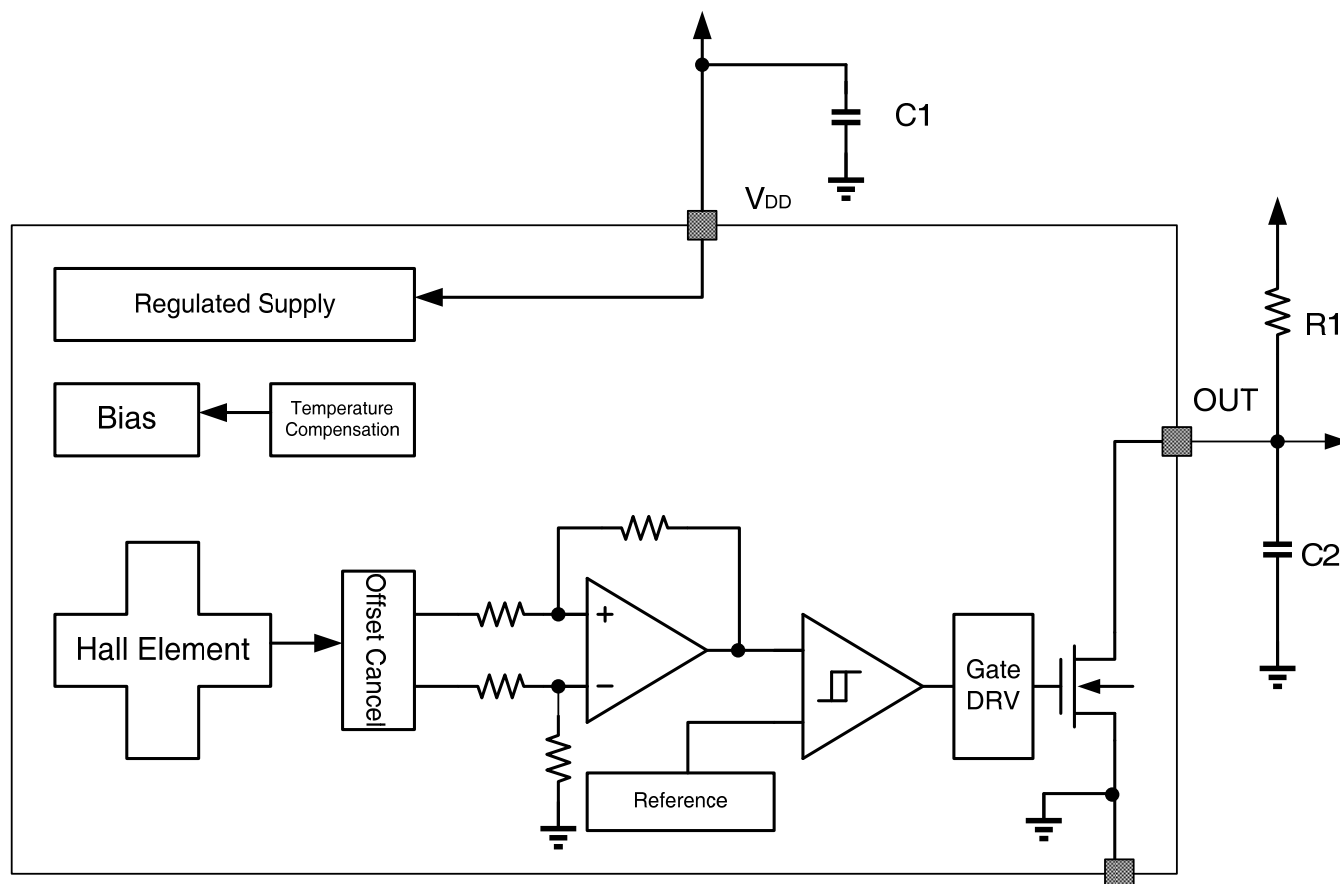

ORDERING INFORMATION

Part Number	Packing	Mounting	Ambient, T _A	B _{OP} (Typ.)	B _{RP} (Typ.)
SC2402UA	Bulk, 1000 pieces/bag	3-pin SIP	-40°C to 150°C	+2.0mT	-2.0mT
SC2402SO-N	Reel, 3000pieces/reel	3-pin SOT23		-2.0mT	+2.0mT
SC2402DN	Reel, 4000pieces/reel	6-pin DFN1616		+2.0mT	-2.0mT

TERMINAL CONFIGURATION

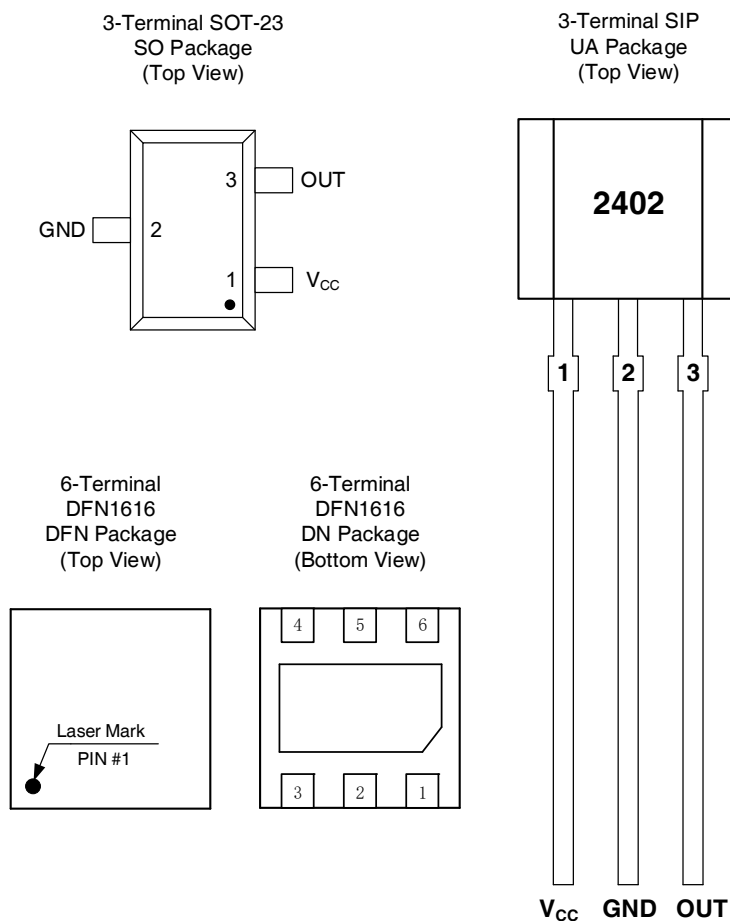

PIN			Name	Type	Description
SIP-3	SOT-23	DFN1616			
1	1	1	V_{CC}	PWR	3.0V ~ 5.5 V power supply
2	2	3	GND	Ground	Ground terminal
3	3	6	OUT	Output	Output terminal
-	-	2	NC	NC	Not connect
-	-	3	NC	NC	Not connect
-	-	5	NC	NC	Not connect

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

Parameter	Symbol	Min.	Max.	Units
Power supply voltage	V _{DD}	-10	20	V
Output terminal voltage	V _{OUT}	-0.5	20	V
Output terminal current sink	I _{SINK}	0	30	mA
Operating ambient temperature	T _A	-40	150	°C
Maximum junction temperature	T _J	-55	165	°C
Storage temperature	T _{STG}	-65	175	°C

⁽¹⁾ Stresses above those listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ESD PROTECTION

Human Body Model (HBM) tests according to: standard AEC-Q100-002

Parameter	Symbol	Min.	Max.	Units
ESD-Protection	V _{ESD}	-3	+3	KV

THERMAL CHARACTERISTICS

Symbol	Parameter	Test Conditions	Rating	Units
R _{θJA}	UA Package thermal resistance	Single-layer PCB, with copper limited to solder pads	166	°C/W
R _{θJA}	SO Package thermal resistance	Single-layer PCB, with copper limited to solder pads	228	°C/W

OPERATING CHARACTERISTICS

Electrical Characteristics

over operating free-air temperature range ($V_{DD} = 5.0V$, unless otherwise noted)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{DD}	Operating voltage ⁽¹⁾	$T_J < T_{J(Max.)}$	2.5	--	18	V
$I_{DD (off)}$	Operating supply current	$V_{DD}=2.5$ to $18V$, $T_A=25^{\circ}C$	1.6	3.8	6.0	mA
$I_{DD (on)}$		$V_{DD}=2.5$ to $18V$, $T_A=25^{\circ}C$	1.6	3.8	6.0	mA
t_{on}	Power-on time		--	--	10	μS
I_{QL}	Off-state leakage current	Output Hi-Z	--	--	3	μA
$R_{DS (on)}$	FET on-resistance	$V_{DD}=5V$, $I_O=10mA$, $T_A=25^{\circ}C$	--	20	--	Ω
		$V_{DD}=5V$, $I_O=10mA$, $T_A=150^{\circ}C$	--	30	--	Ω
t_d	Output delay time	$B=B_{RP}$ to B_{OP}	--	15	25	μS
t_r	Output rise time (10% to 90%)	$R1=1K\Omega$ $C_o=50pF$	--	--	0.5	μS
t_f	Output fall time (90% to 10%)	$R1=1K\Omega$ $C_o=50pF$	--	--	0.2	μS

⁽¹⁾ Maximum voltage must be adjusted for power dissipation and junction temperature, see Thermal Characteristics

Magnetic Characteristics

over operating free-air temperature range ($V_{DD} = 5.0V$, unless otherwise noted)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
f_{BW}	Bandwidth		20	--	--	kHz
B_{OP}	Operated point	$T_A=-40^{\circ}C$ to $150^{\circ}C$	+1.0	+2.0	+3.0	mT
B_{RP}	Release point		-3.0	-2.0	-1.0	mT
B_{HYS}	Hysteresis		--	4.0	--	mT

1mT=10Gs


Magnetic flux density, B , is indicated as a negative value for North-polarity magnetic fields, and as a positive value for South-polarity magnetic fields.

TYPICAL CHARACTERISTIC


I_{DD} vs V_{DD}

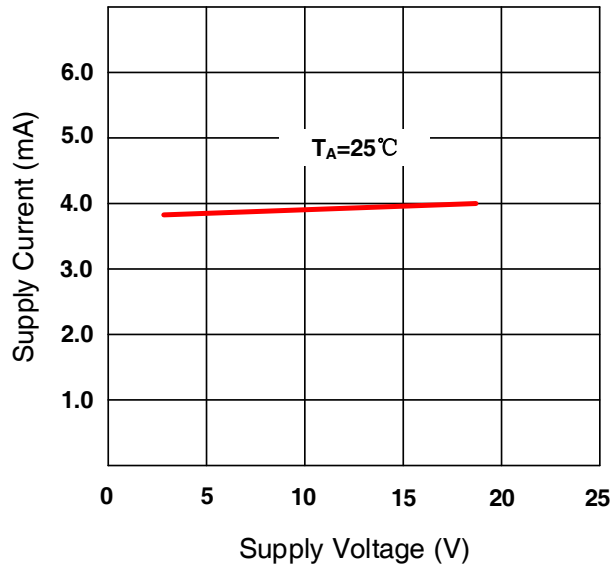


I_{DD} vs T_A

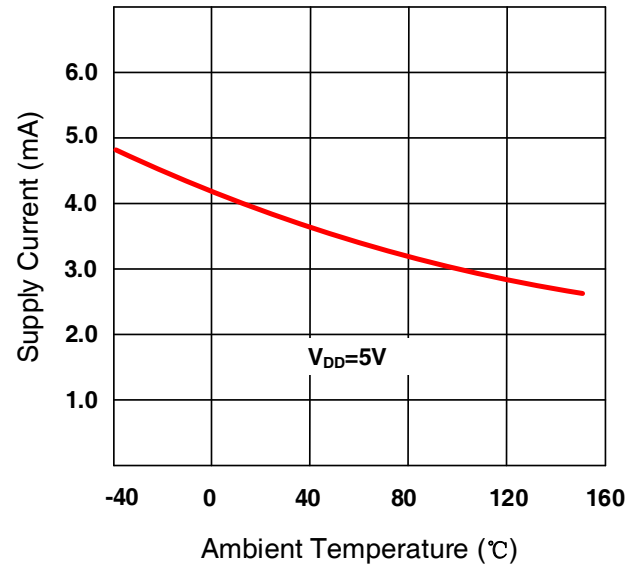

$V_{Q(sat)}$ vs V_{DD}

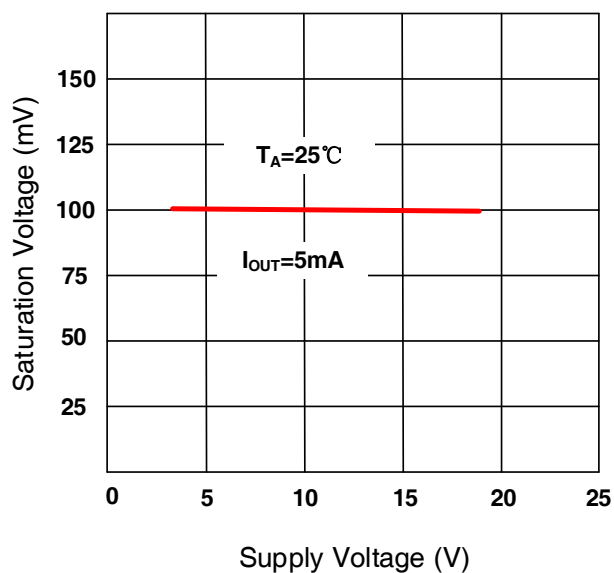


$V_{Q(sat)}$ vs T_A

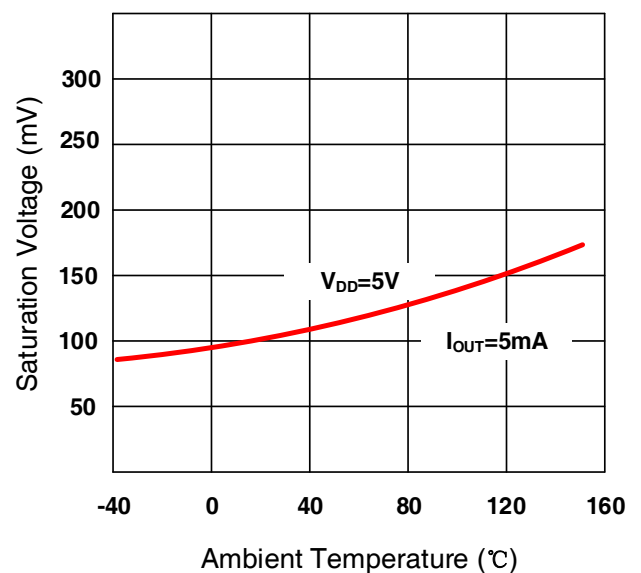


TYPICAL CHARACTERISTIC (Continued)

B_{OP} and B_{RP} vs T_A

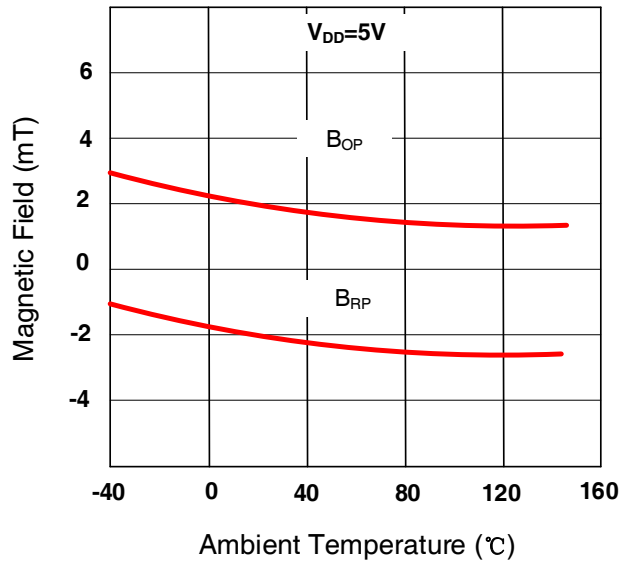

B_{HYS} vs T_A

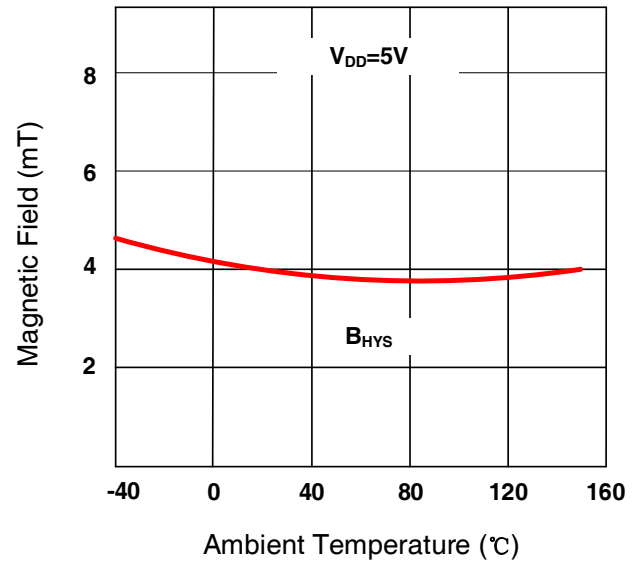

FUNCTION DESCRIPTION


The SC2402 device is a chopper-stabilized Hall sensor with a digital latched output for magnetic sensing applications. The device can be powered with a supply voltage between 2.5 and 18V. The device does not operate when -10 to 2.2V is applied to the V_{DD} terminal (with respect to the GND terminal).

The output of SC2402 switches low (turns on) when a magnetic field (South polarity) perpendicular to the Hall element exceeds the operate point threshold, B_{OP} . After turn-on, the output is capable of sinking 20mA and the output voltage is $V_{Q(sat)}$. When the magnetic field is reduced below the release point, B_{RP} , the device output goes high (turns off). The difference in the magnetic operate and release points is the hysteresis, B_{HYS} , of the device. This built-in hysteresis allows clean switching of the output even in the presence of external mechanical vibration and electrical noise.

An external output pull-up resistor is required on the OUT terminal. The OUT terminal can be pulled up to V_{DD} or to a different voltage supply. This allows for easier interfacing with controller circuits.


Field Direction Definition

A positive magnetic field is defined as a South pole near the marked side of the package.

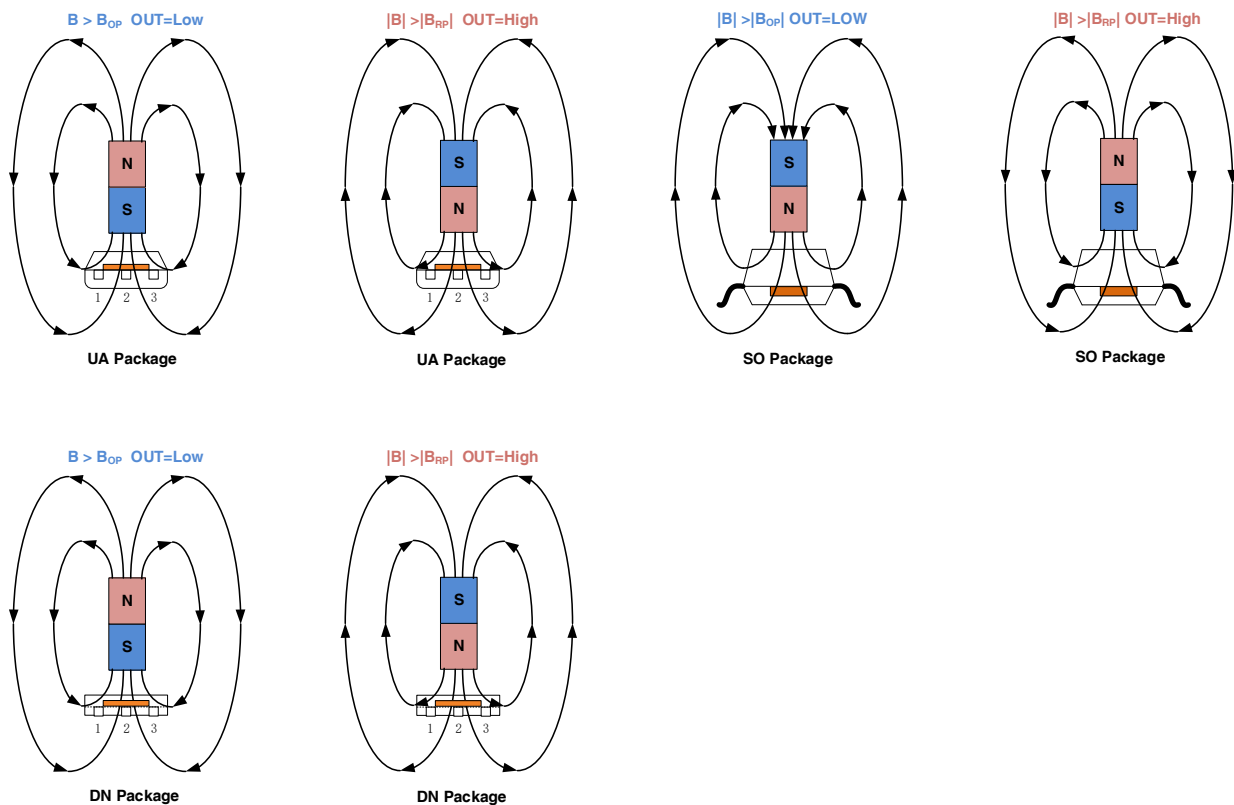


Transfer Function

Powering-on the device in the hysteresis region, less than B_{OP} and higher than B_{RP} , allows an indeterminate output state. The correct state is attained after the first excursion beyond B_{OP} or B_{RP} . If the field strength is greater than B_{OP} , then the output is pulled low. If the field strength is less than B_{RP} , the output is released.

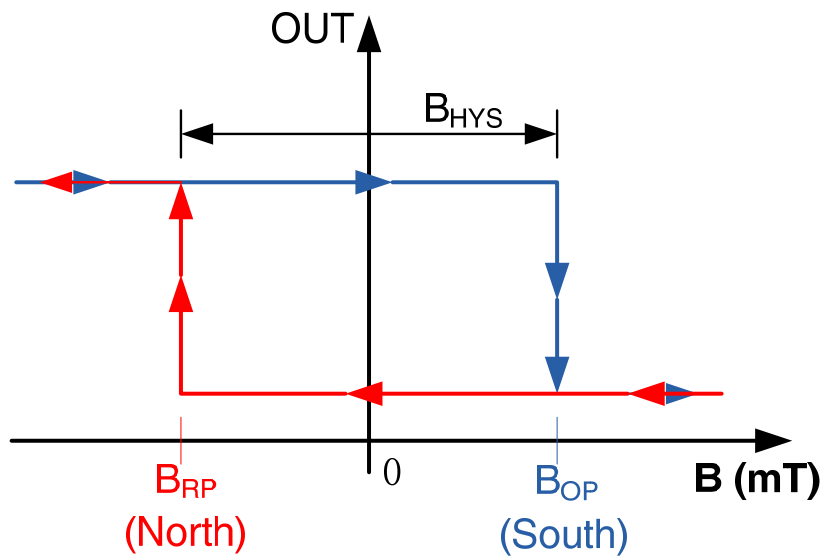

TYPICAL APPLICATION

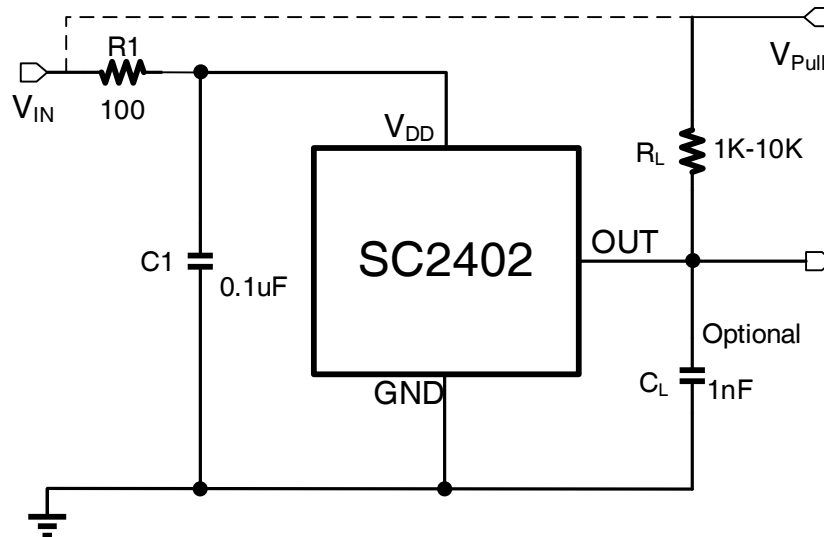

The SC2402 contains an on-chip voltage regulator and can operate over a wide supply voltage range. In applications that operate the device from an unregulated power supply, transient protection must be added externally. For applications using a regulated line, EMI/RFI protection may still be required. It is recommended to shunt C1 capacitors to the ground near the chip V_{DD} power supply, with a typical value of 0.1 μ F. At the same time in the external optional series resistor R1 their typical values for 100 Ω . The output capacitor C_L is used as the output filter, typically 1nF.

Select a value for C_L based on the system bandwidth specifications as:

$$C_L = \frac{1}{2\pi \times R \times f \text{ (Hz)}}$$


The output stage of the SC2402 device is a drain open-circuit NMOS tube, which provides a load capacity of 20mA. Adjust the pull-up resistor R_L to make it work properly. The R_L provides a high level for the leak-opening output. In general, less current is better, but faster transient response and bandwidth are required, with a smaller resistor R_L for faster switching.

V_{PULL} is not restricted to V_{DD}, and could be connected to other voltage reference. The allowable voltage range of this terminal is specified in the Absolute Maximum Ratings.

PACKAGE INFORMATION “UA”

**3-Terminal
UA Package**

Dimension:mm

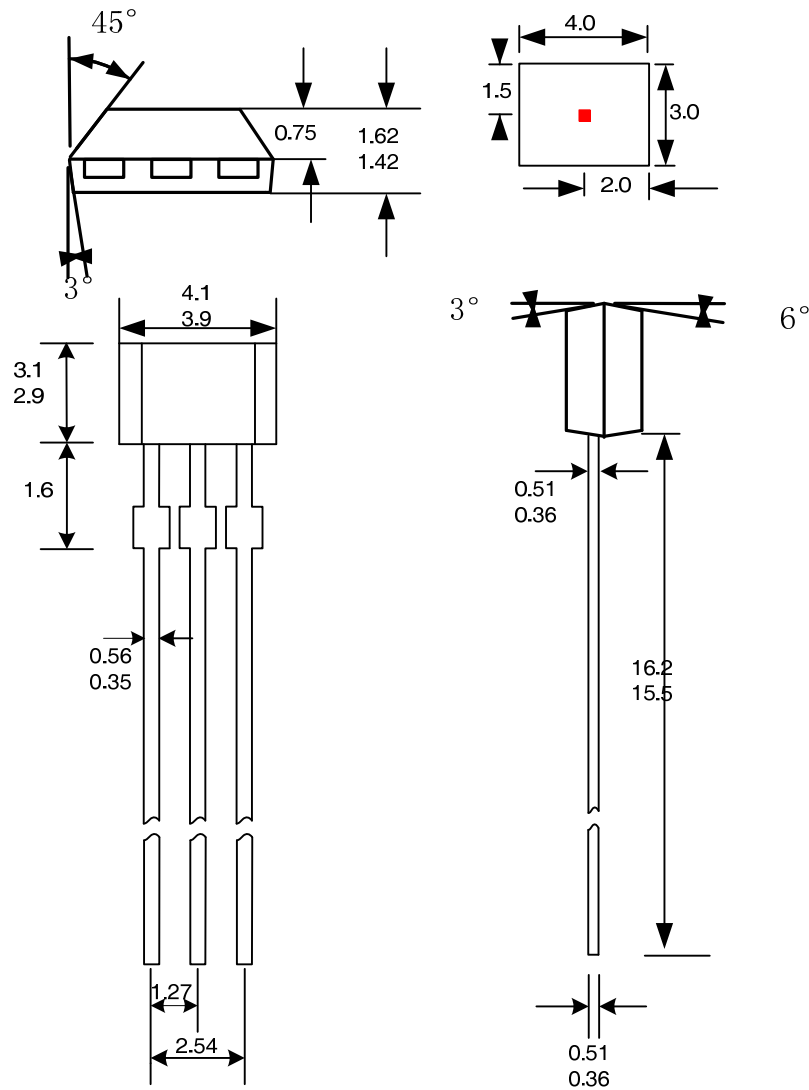

Notes:


1. Exact body and lead configuration at vendor's option within limits shown.
2. Height does not include mold gate flash.

Where no tolerance is specified, dimension is nominal.

PACKAGE INFORMATION “SO”

**3-Terminal
SO Package**

Dimension:mm

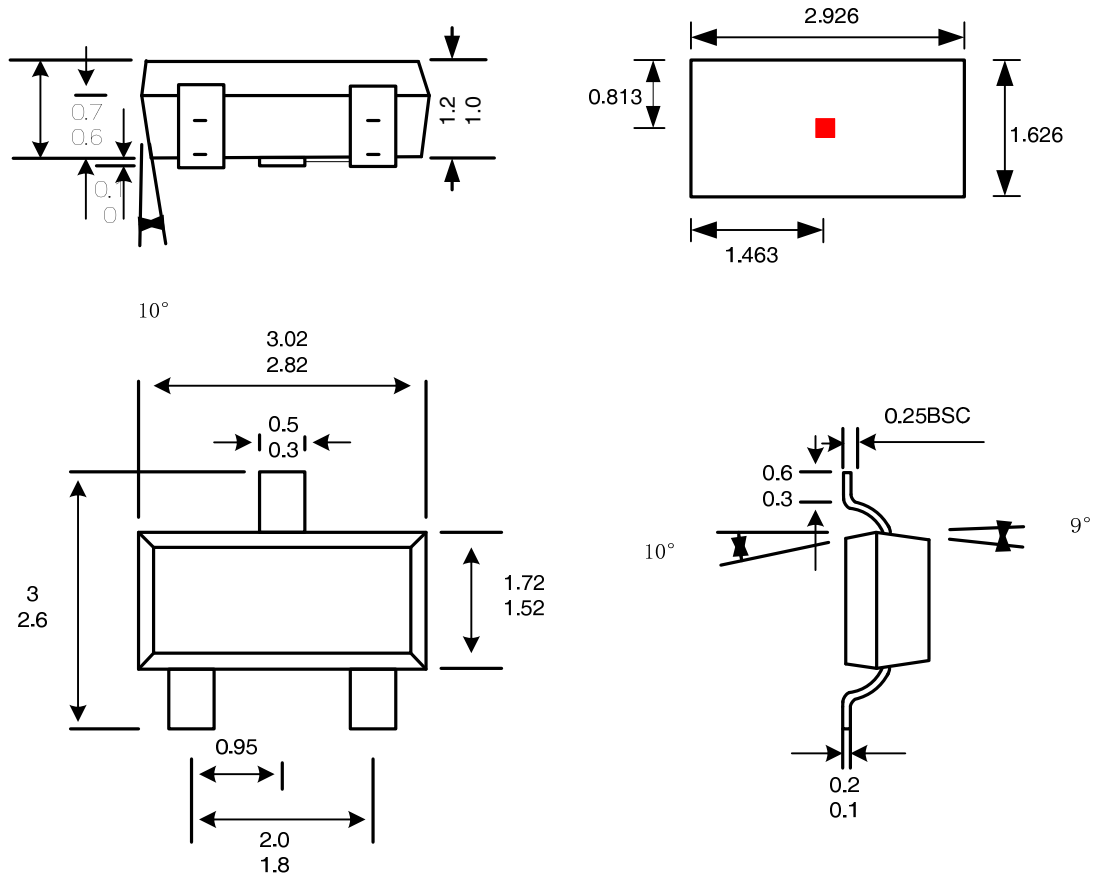


Notes:

1. Exact body and lead configuration at vendor's option within limits shown.
2. Height does not include mold gate flash.

Where no tolerance is specified, dimension is nominal.

**6-Terminal
DFN Package**

Dimension:mm

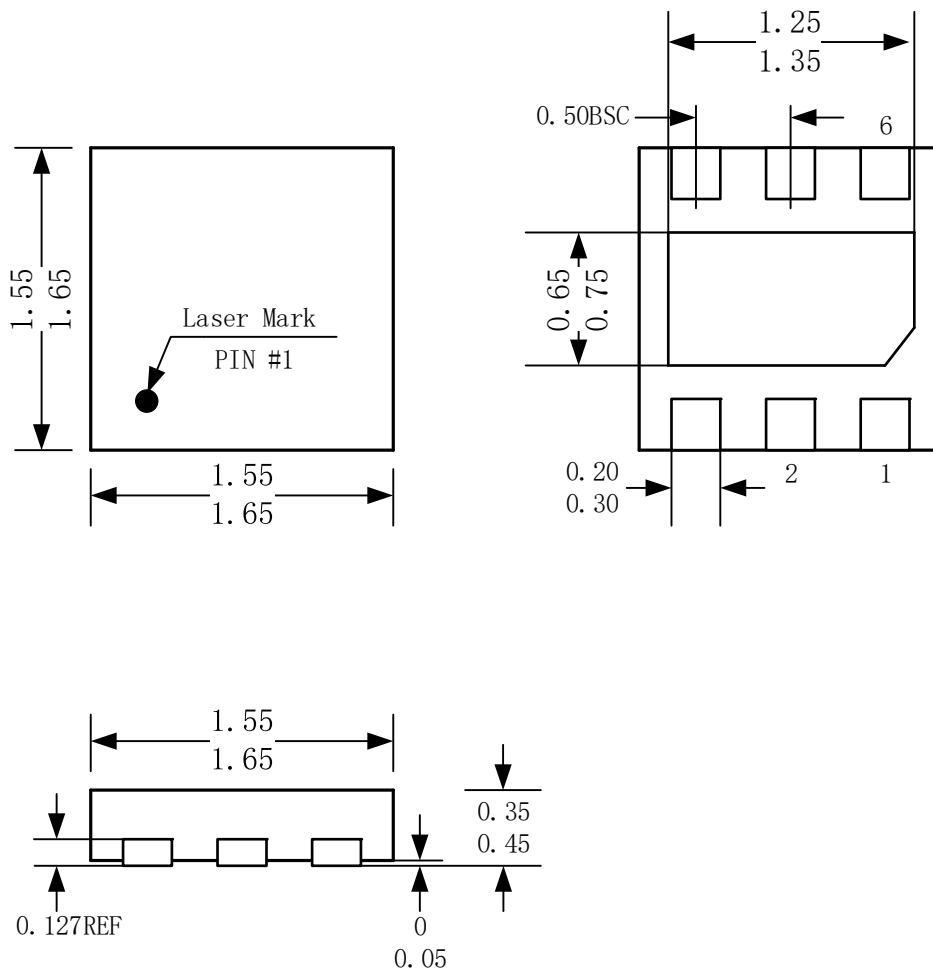

Notes:

1. Exact body and lead configuration at vendor's option within limits shown.
2. Height does not include mold gate flash.

Where no tolerance is specified, dimension is nominal.

REVISION HISTORY

Revision	Date	Description
Rev0.1	2020-10-12	Preliminary datasheet
Rev2.3	2020-11-13	The final revision of old datasheet
RevA/1.0	2024-02-21	Add DFN package information