
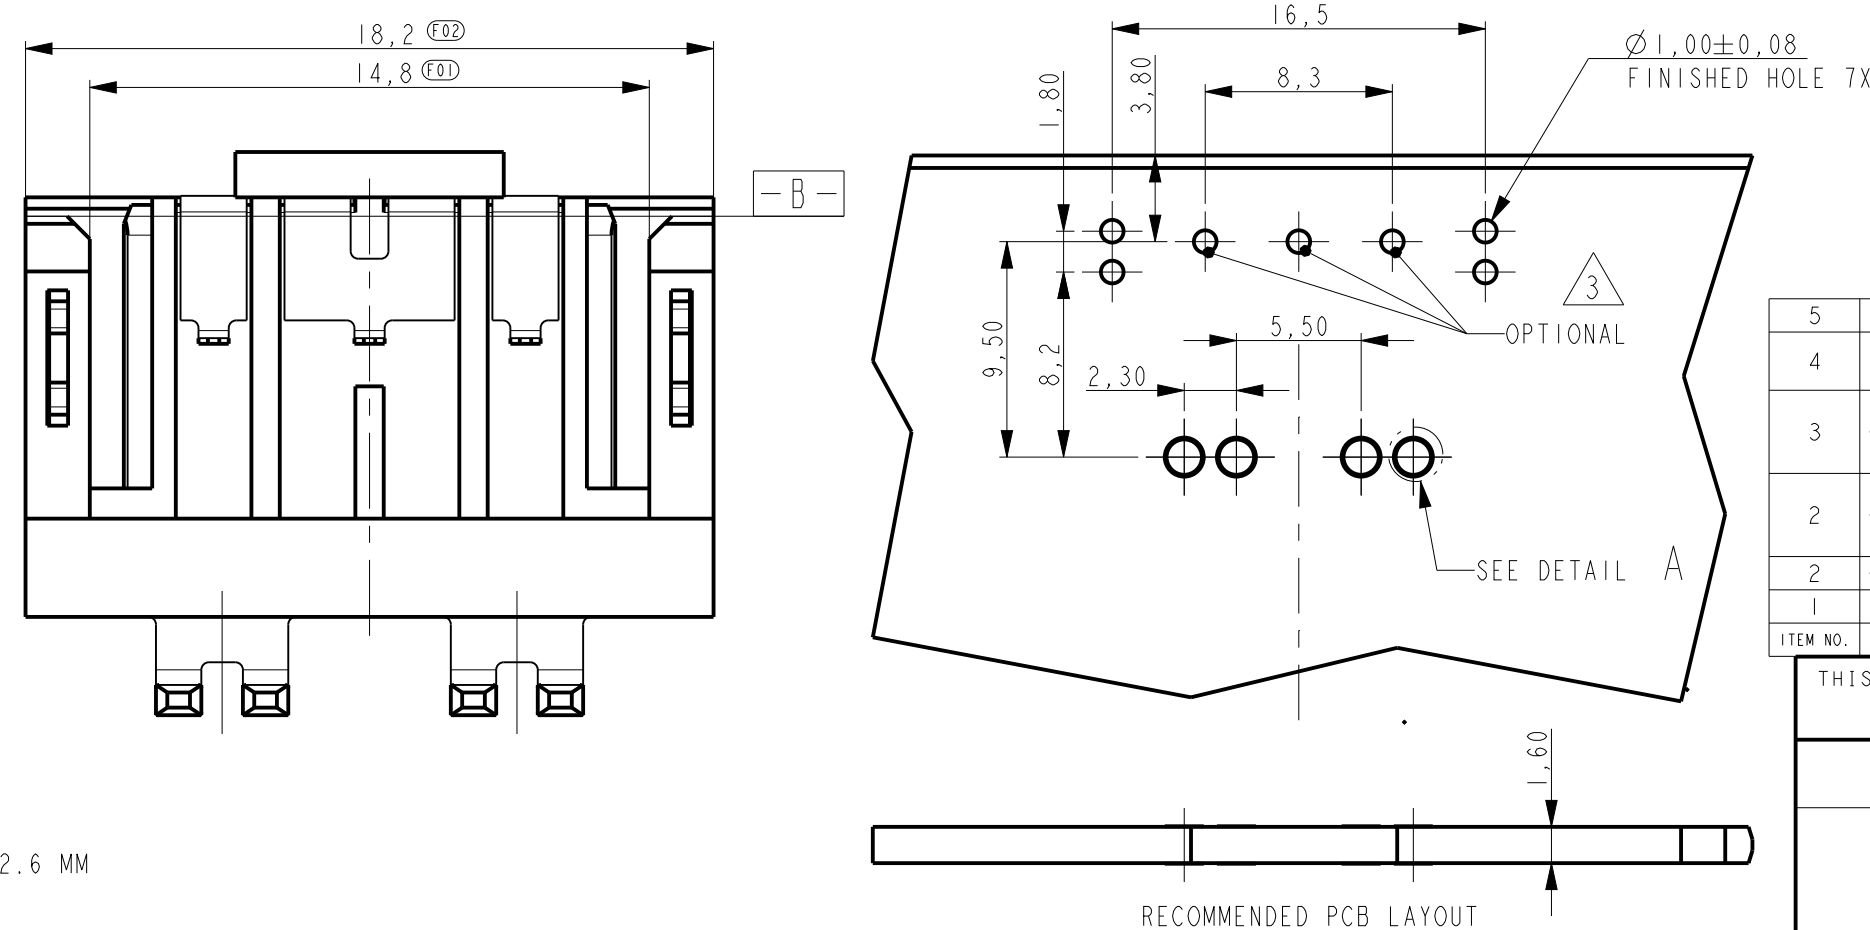
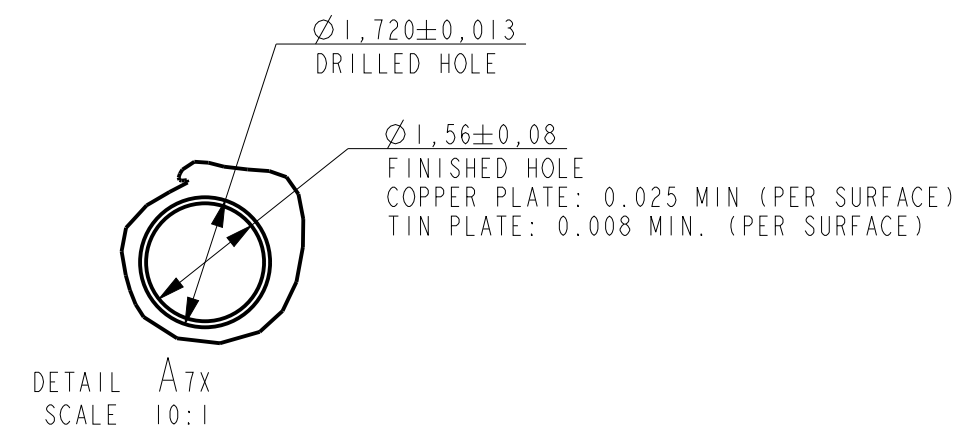
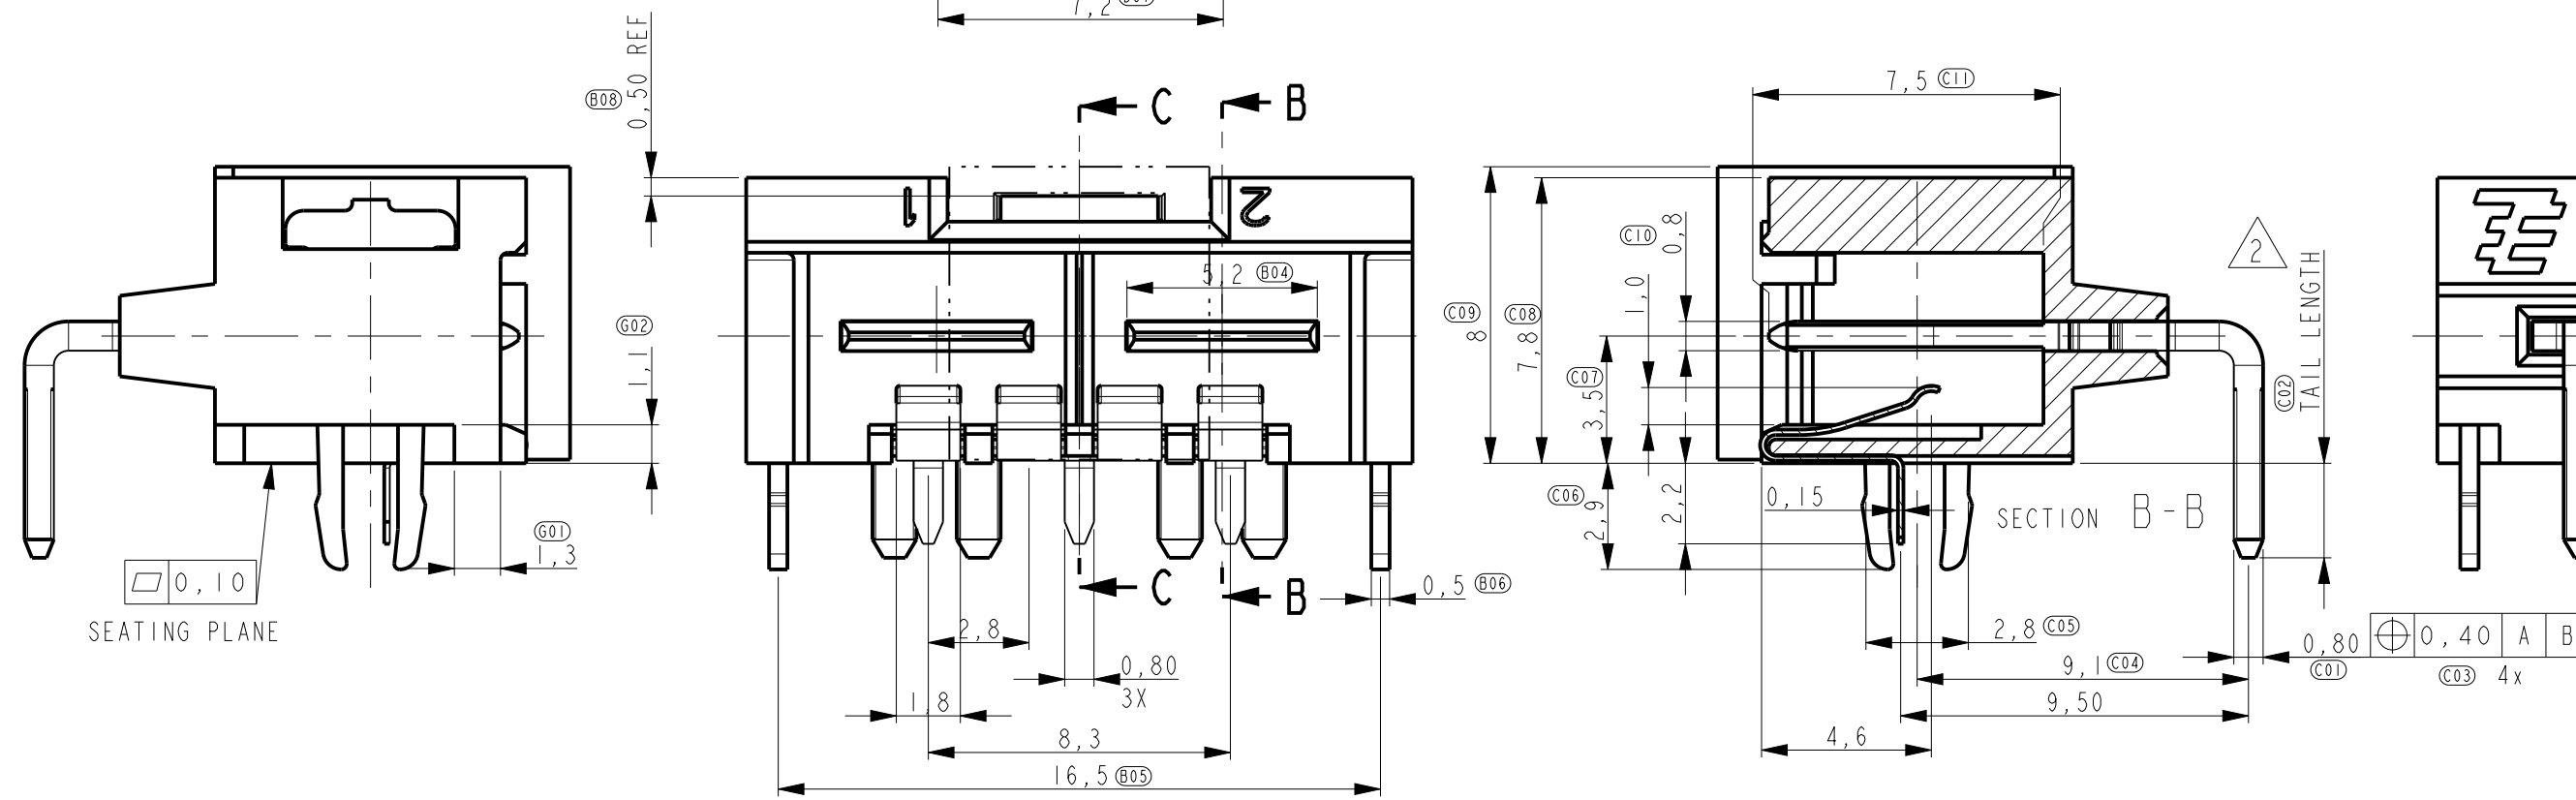
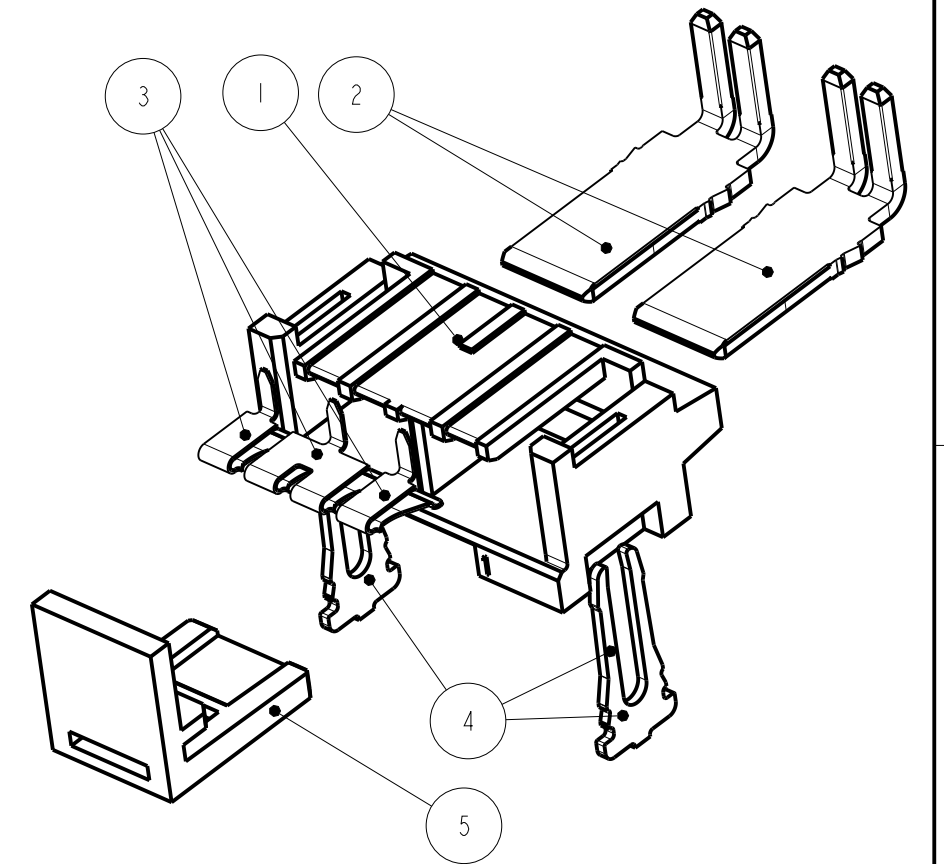


LOC	DIST	REVISIONS					
IR	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B2	ADD 1982295-6	26MAR2013	OL	SZ
			C	REV PER ECO-14-014260	19SEP2014	OL	SZ

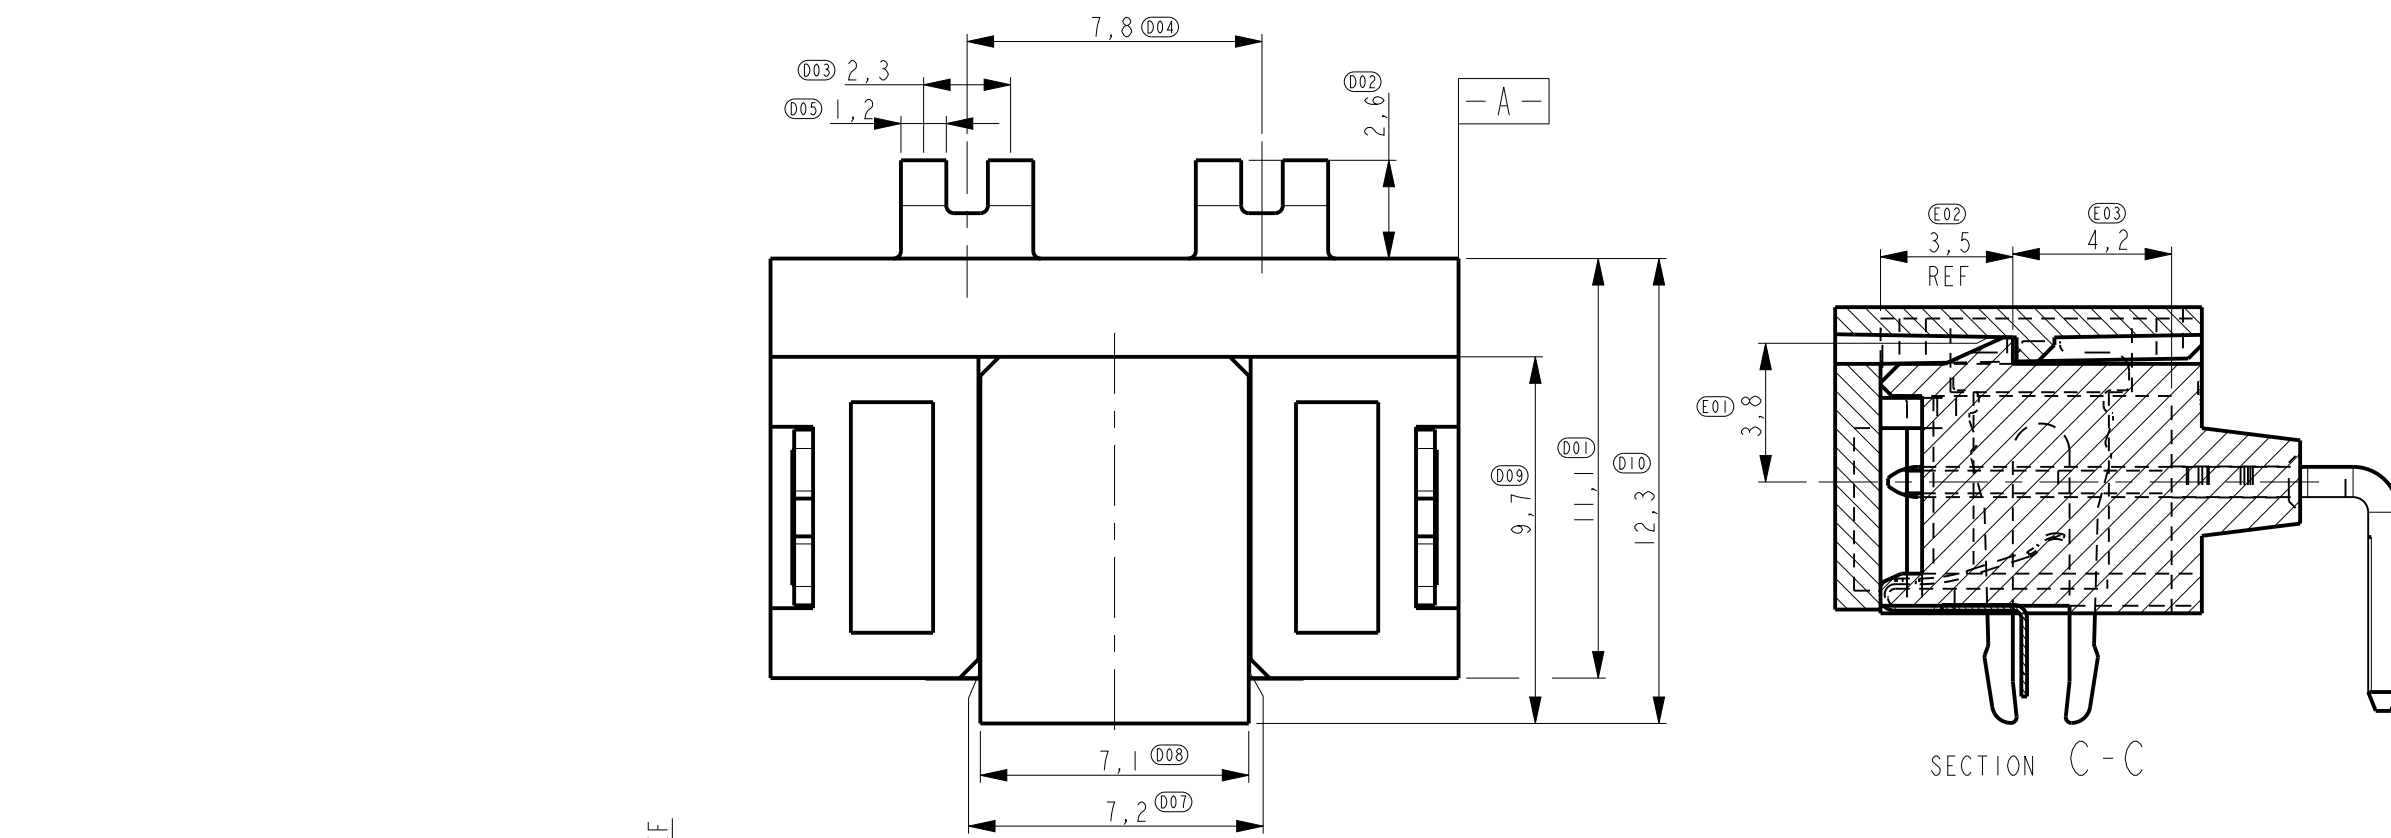


NOTES:

I. DURABILITY OF 1982295-4 CAN BE DECLARED ONLY AFTER TESTING.

2 TAIL LENGTH IS 3.6 MM FOR -6, OTHERS ARE 2.6 MM

3 OPTIONAL, THEY ARE REQUIRED WHEN CODING CONTACTS NEEDED.




5	PICK&PLACE ADAPTOR	POLYAMIDE	NA	1	-	1	1	1
4	HOLD DOWN	DINI544 CK75	5,0 µm Sn MIN OVER 2,5 µm Ni MIN ALL OVER.	2	2	2	2	2
3	CONTACT DETECTION	COPPER ALLOY	0.8 µm Au MIN. IN CONTACT PLACE, Au FLASH IN SOLDER AREA OVER 1.27µm Ni MIN ALL OVER	-	4	-	-	4
2	CONTACT POWER TAB	COPPER ALLOY	1.2µm Ni MIN. ALL OVER 0.8µm Au MIN AT MATING ZONE 0.1-0.15 µm Au AT SOLDER ZONE	2	-	2	-	-
2	CONTACT POWER TAB	COPPER ALLOY	3,0 µm Ag MIN ALL OVER.	-	2	-	2	2
1	HOUSING	LCP GF UL94V-0	NA	1	1	1	1	1
ITEM NO.	DESCRIPTION	MATERIAL	FINISH	QTY	QTY	QTY	QTY	QTY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 22-Sep-14 R. Annokkeg CHK 22-Sep-14 R. Annokkeg APVD 22-Sep-14 J. Broeksteeg		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0,5 1 PLC ±0,1 2 PLC ±0,05 3 PLC ±- 4 PLC ±- ANGLES ±2 FINISH		NAME 2 POS POWER CONNECTOR, WITH/ WITHOUT DETECTION CONTACTS PCB THICKNESS OF 1,6	
MATERIAL		PRODUCT SPEC 108-19346 APPLICATION SPEC 114-19110 WEIGHT -		SIZE A2	CAGE CODE 00779
		Customer Drawing		DRAWING NO C-1982295	RESTRICTED TO -
				SCALE 5:1	SHEET 1 OF 2
				REV	C

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
IR	-	-	-	SEE SHEET 1	-	-



NOTES:

1. TRAY (PN 3178822-1) PACKAGING IS ONLY FOR PN 1982295-5.

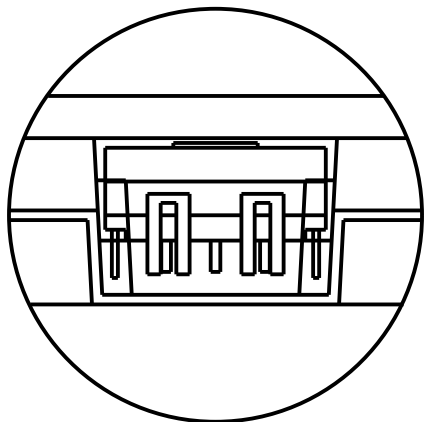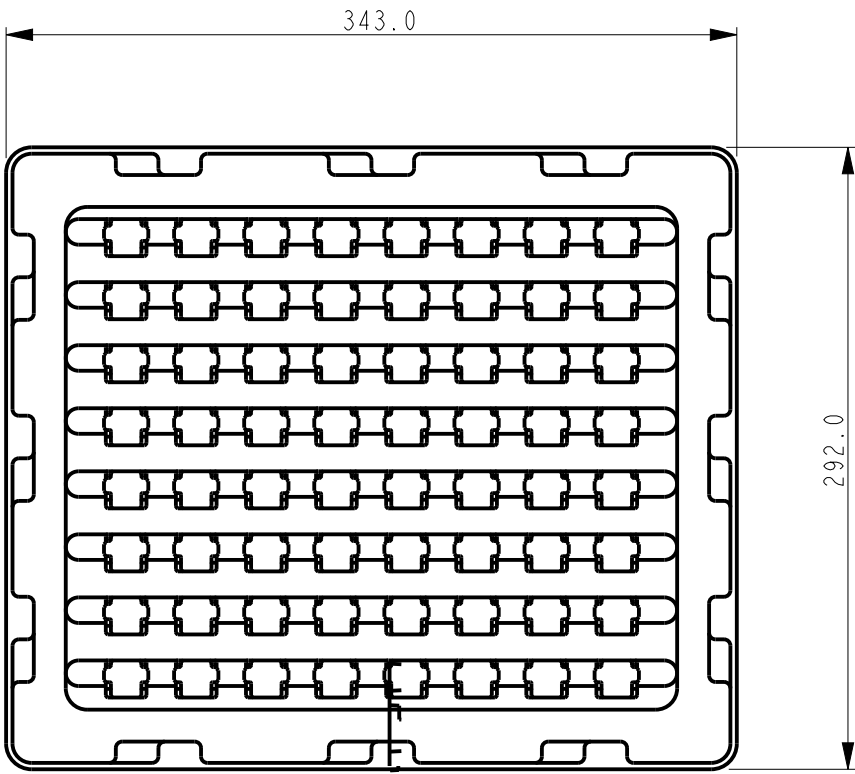

DETAIL B

DO NOT SCALE

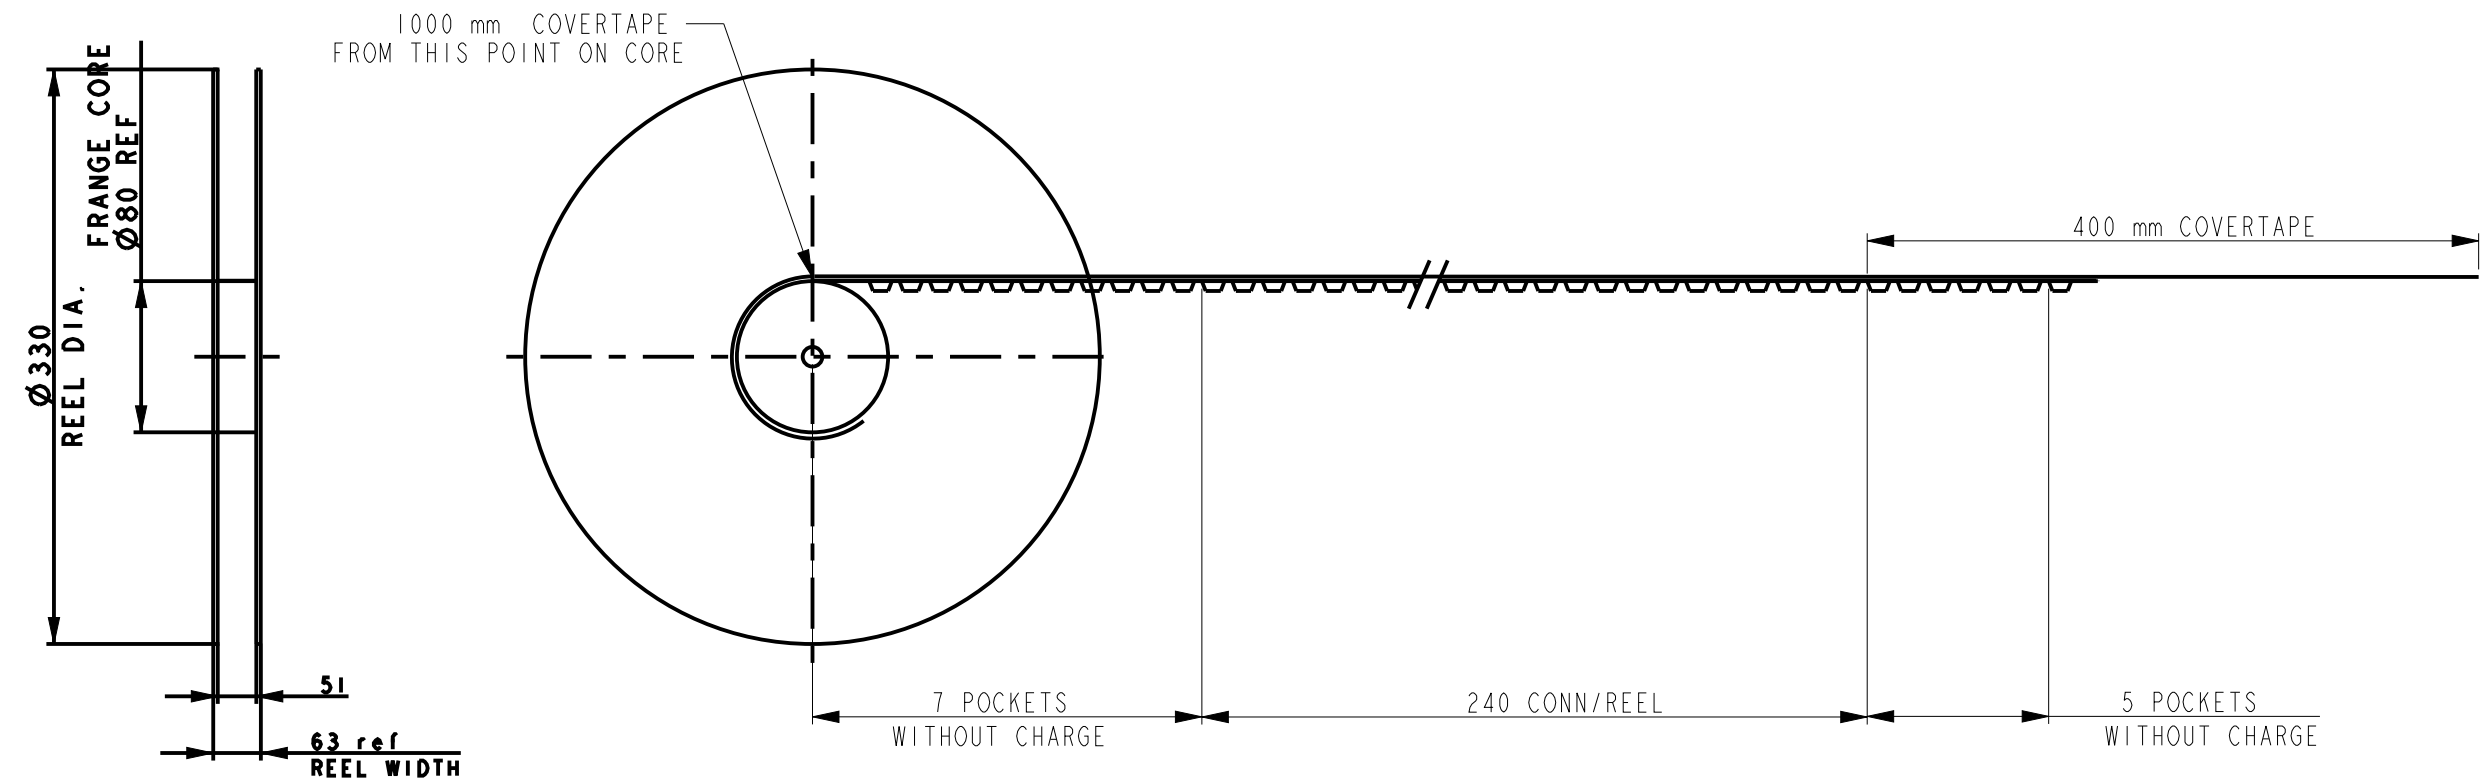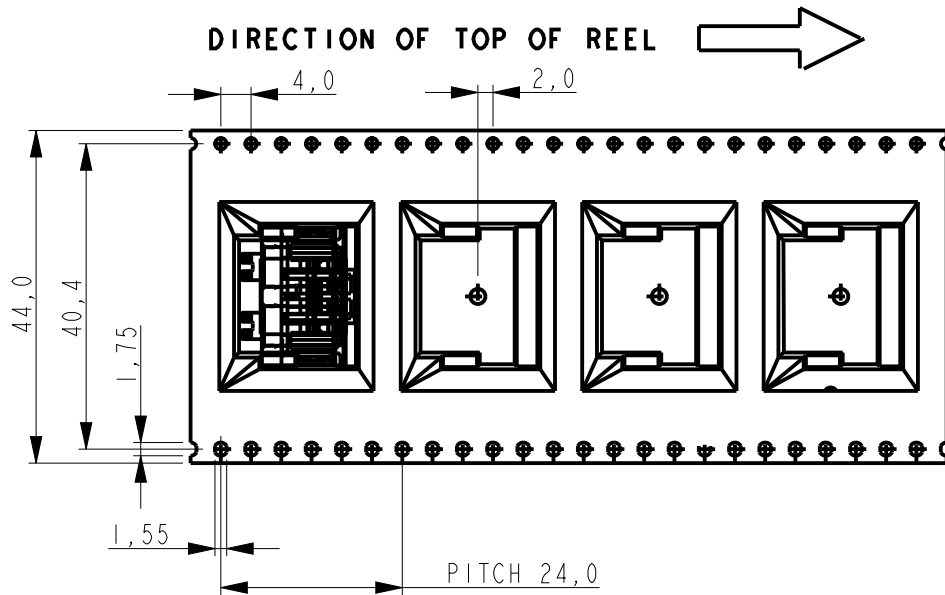

- NOTES:
- 1 MATERIAL: TRANSPARENT POLYSTYRENE ALLOY.
 - 2 10 SPROCKET HOLES PITCH CUMULATIVE TOLERANCE +/-0,20.
 - 3 CARRIER CAMBER IS WITHIN 1 mm IN 250 mm.
 - 4 ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
 - 5 THICKNESS: 0,50±0,05mm.
 - 6 REEL PACKAGING ONLY FOR OTHER PART NUMBERS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. Annokkee 22-Sep-14	TE Connectivity			
DIMENSIONS: mm		CHK R. Annokkee 22-Sep-14				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. Broeksteeg 22-Sep-14	NAME 2 POS POWER CONNECTOR WITHOUT DETECTION CONTACTS PCB THICKNESS OF 1,6			
0 PLC ±0,5 1 PLC ±0,1 2 PLC ±0,05 3 PLC ± 4 PLC ± ANGLES ±2 FINISH		PRODUCT SPEC 108-19346 APPLICATION SPEC 114-19110 WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C-1982295	RESTRICTED TO -
MATERIAL -		Customer Drawing	SCALE 5:1	SHEET 2	OF 2	REV C