



REVISION					
ZONE	LTR	ECN	DESCRIPTION	DATE	APPROVED
	B	39399	GEN. DWG UPDATE	11/22/94	RLC

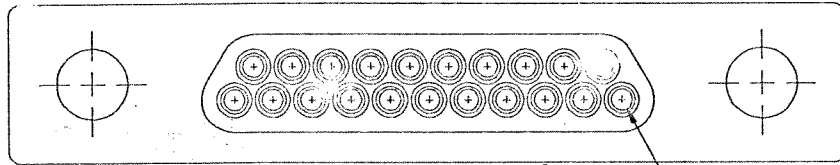

1 REF

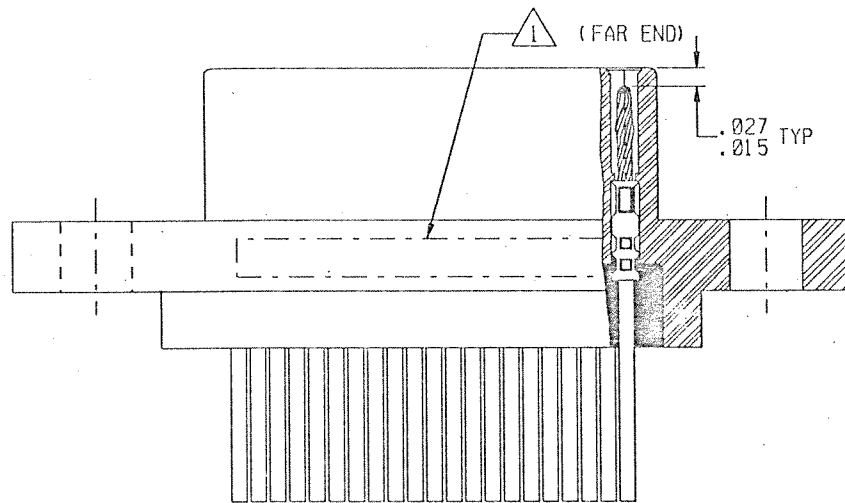


PIN CONTACT

INSULATOR
MCDD1-21PI

"L" MIN

LEADS

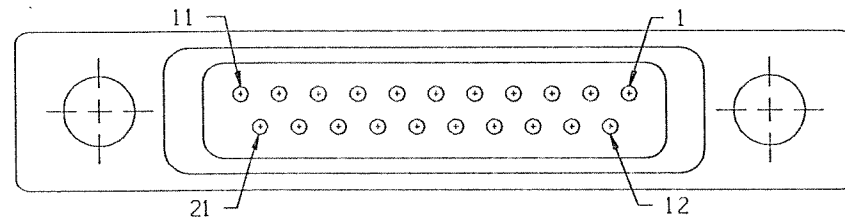

2-1532143-2

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCE ARE:		APPROVALS		MICRODOT CONNECTORS A DIVISION OF UNI-STAR INDUSTRIES INC. 306 PASADENA AVE., SO. PASADENA, CA 91030	PROD CODE 824 CODE M	
FRACTIONS ± 1/8	DECIMALS .XX ± .01 .XXX ± .005	ANGLES ± 2°	SIGNATURE			DATE
MATERIAL:			DRAWN BY MEL F. CAMPOS			09/21/99
			P.E. <i>M. Campos</i>			9/21/99
			M.E.			
FINISH:			D.A.			
			THIS DOCUMENT IS THE PROPERTY OF MICRODOT CONNECTORS, A DIVISION OF UNI-STAR INDUSTRIES INC. USE OF THIS DOCUMENT OR ANY PART THEREOF IS STRICTLY FORBIDDEN WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRODOT CONNECTORS, A DIVISION OF UNI-STAR INDUSTRIES INC.			
RACK & PANEL CONNETOR MCDD1-B-21P (SCREW MTC)		SIZE A	CODE IDENT NO. 98278	DRAWING NO. 095-0000-0118		
SCALE: NONE		SHEET 1 OF 1				

NOTES: UNLESS OTHERWISE SPECIFIED

1. MARK PER TIS.

2. POTTING COMPOUND USED IS 194-8104-6215/6225.

3. CRIMP LEADS INTO CONTACTS PER MEP 302-05.

4. EPOXY WICKING FROM THE REAR OF THE INSULATOR ON INSULATED LEADS MUST NOT EXCEED .125 MAX ON #25 AWG AND SMALLER LEADS AND .200 MAX ON #24 AWG AND LARGER LEADS.