

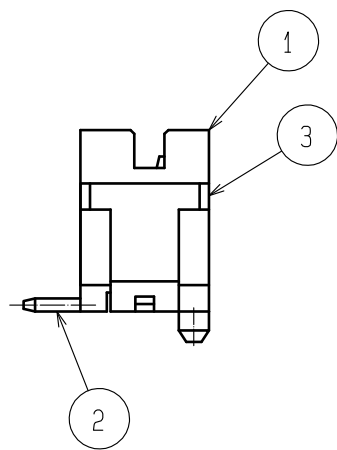
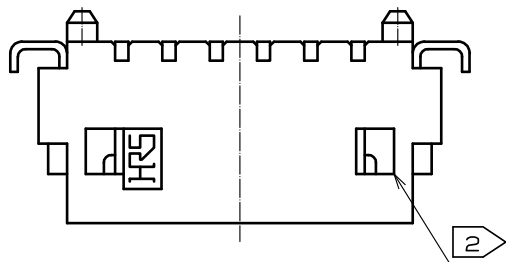
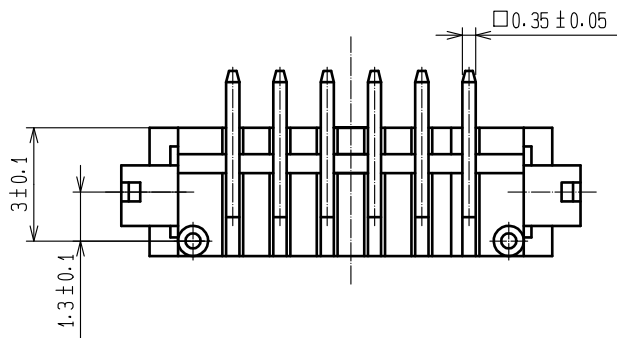
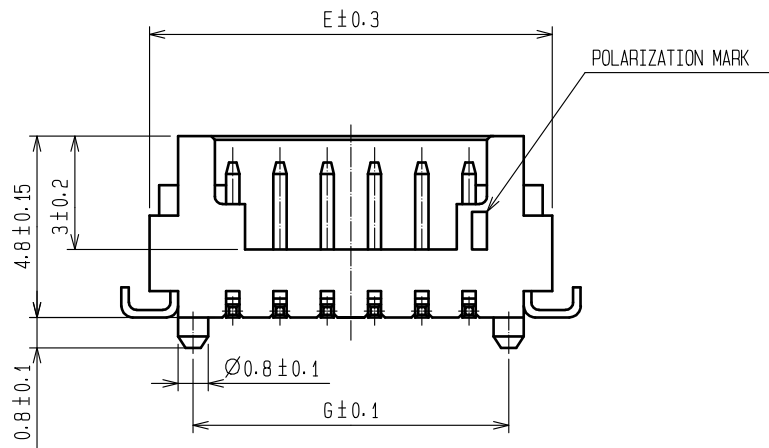


A
B
C
D
E
F

A
B
C
D
E
F

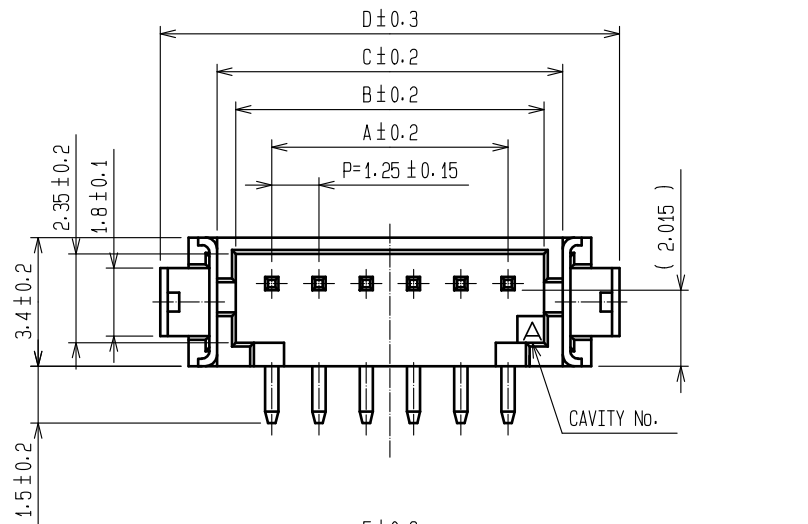


APPLICATION DRAWING

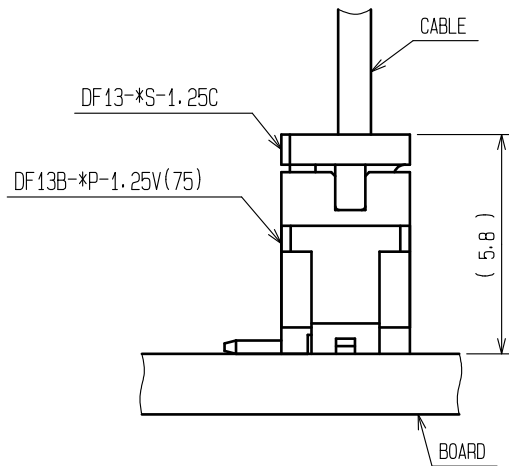


CODE No.	PART No.	CONTACT	A	B	C	D	E	F	G
CL536-0051-2-75	DF13B- 2P-1.25V(75)	2	1.25	3.15	4.15	7.15	5.65	1.95	3.35
CL536-0052-5-75	DF13B- 3P-1.25V(75)	3	2.50	4.40	5.40	8.40	6.90	3.20	4.60
CL536-0053-8-75	DF13B- 4P-1.25V(75)	4	3.75	5.65	6.65	9.65	8.15	4.45	5.85
CL536-0054-0-75	DF13B- 5P-1.25V(75)	5	5.00	6.90	7.90	10.90	9.40	5.70	7.10
CL536-0055-3-75	DF13B- 6P-1.25V(75)	6	6.25	8.15	9.15	12.15	10.65	6.95	8.35
-	DF13B- 7P-1.25V(75)	7	7.50	9.40	10.40	13.40	11.90	8.20	9.60
-	DF13B- 8P-1.25V(75)	8	8.75	10.65	11.65	14.65	13.15	9.45	10.85
-	DF13B- 9P-1.25V(75)	9	10.00	11.90	12.90	15.90	14.40	10.70	12.10
CL536-0059-4-75	DF13B-10P-1.25V(75)	10	11.25	13.15	14.15	17.15	15.65	11.95	13.35
-	DF13B-11P-1.25V(75)	11	12.50	14.40	15.40	18.40	16.90	13.20	14.60
-	DF13B-12P-1.25V(75)	12	13.75	15.65	16.65	19.65	18.15	14.45	15.85
CL536-0063-1-75	DF13B-14P-1.25V(75)	14	16.25	18.15	19.15	22.15	20.65	16.95	18.35
CL536-0064-4-75	DF13B-15P-1.25V(75)	15	17.50	19.40	20.40	23.40	21.90	18.20	19.60

RECOMMENDED PATTERN

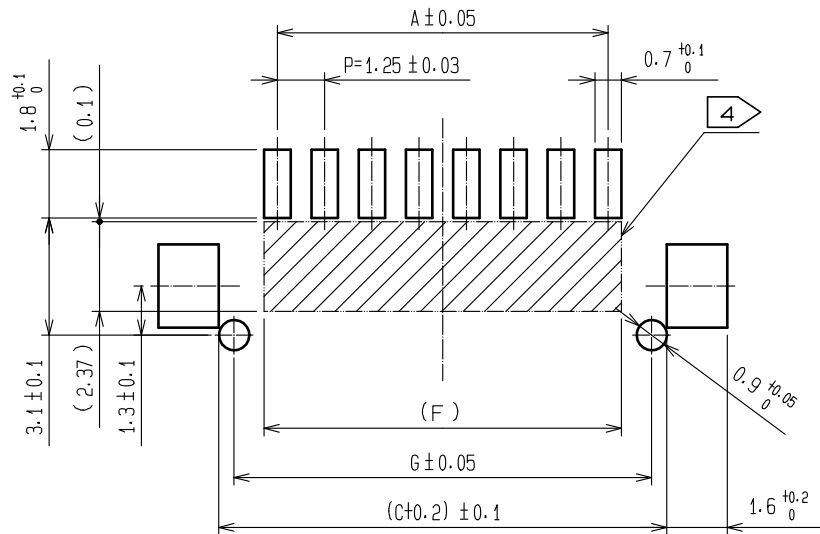

- NOTES
- 1 WHEN THIS CONNECTOR MATES WITH DF13-*S-1.25C, THE MATING HEIGHT IS 5.8mm.
 - 2 WHEN THIS CONNECTOR HAS TWO OR THREE CONTACTS, THE LOCK SHALL BE SET AT THE CENTER OF HOUSING. IF MORE THAN FOUR, THE TWO LOCKS SHALL BE SET AS SHOWN ON THIS DRAWING.
 - 3 LEAD CO-PLANARITY INCLUDING REINFORCED METAL FITTINGS SHALL BE WITHIN 0.1mm. AREA TO PICK AND PLACE.
 - 4 PROHIBITED AREA OF PATTERN WITHOUT RESIST COATING.

			5	ELASTOMER	GRAY, STOPPER				
2	BRASS	SURFACE:TIN PLATED 1μm min.		4	R. PVC	ANTI-ELECTRIFICATION, CLEAR, STICK			
1	POLYAMIDE	UL94V-0, BEIGE		3	PHOSPHOR BRONZE	SURFACE:TIN PLATED 1μm min.			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		18. 04. 03	DRAWING NO.	EDC-083670-75-00			
		CHECKED : TS. FUKUSHIMA		18. 04. 03	PART NO.	DF13B- *P-1. 25V(75)			
		DESIGNED : TS. KUMAZAWA		18. 04. 03	CODE NO.	CL536-			
		DRAWN : MK. INOUE		18. 04. 02		 1/2			

