


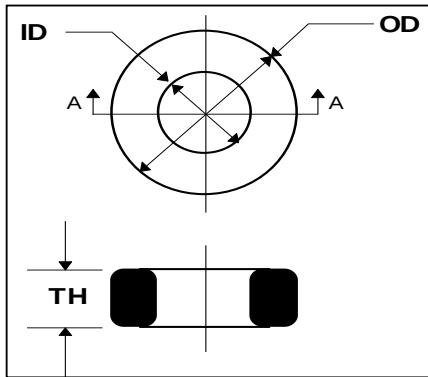

CORE DIMENSIONS 28T0115-400

UNCOATED CORE					
	MM	INCHES		MM	INCHES
OD	2.93	(.115)	±	.15	(.006)
ID	1.63	(.064)	±	.15	(.006)
TH	3.75	(.148)	±	.15	(.006)

WEIGHT / K 0.0854 KGS .1883 LBS
INITIAL PERMEABILITY 850

ROOM TEMPERATURE ELECTRICAL SPECIFICATION									
	MIN. TOL.	MIN. (μH)	NOM. (μH)	MAX. (μH)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	GAUSS	TURNS
L1 Ref.	-25.0%	0.28	0.38	0.47	25.0%	100	1.06	10	1
Net Impedance	MIN (Ω)	MIN TOL.	NOM (Ω)			FREQ. (MHz)			TURNS
Z1 (Ref.)	-	-	19	-		25	-		1
Z2	21	(-25%)	28	-		100	-		1

NOTES:

1. Cosmetic Specification refer to WI-QA-015.



Rev	Description	Date	INT
A	New release	2020/4/19	WS

Date: 2020/4/19	Tooling: T0115	Rev: A
Drawn By: WS	Title # 28T0115-400	
Laird This document contains information which is proprietary to laird. No production or publication of this document in whole or in part shall be made without written authorization from Laird.		