



DRAWING FOR REFERENCE: This is subject to change without notice
05/31/2013

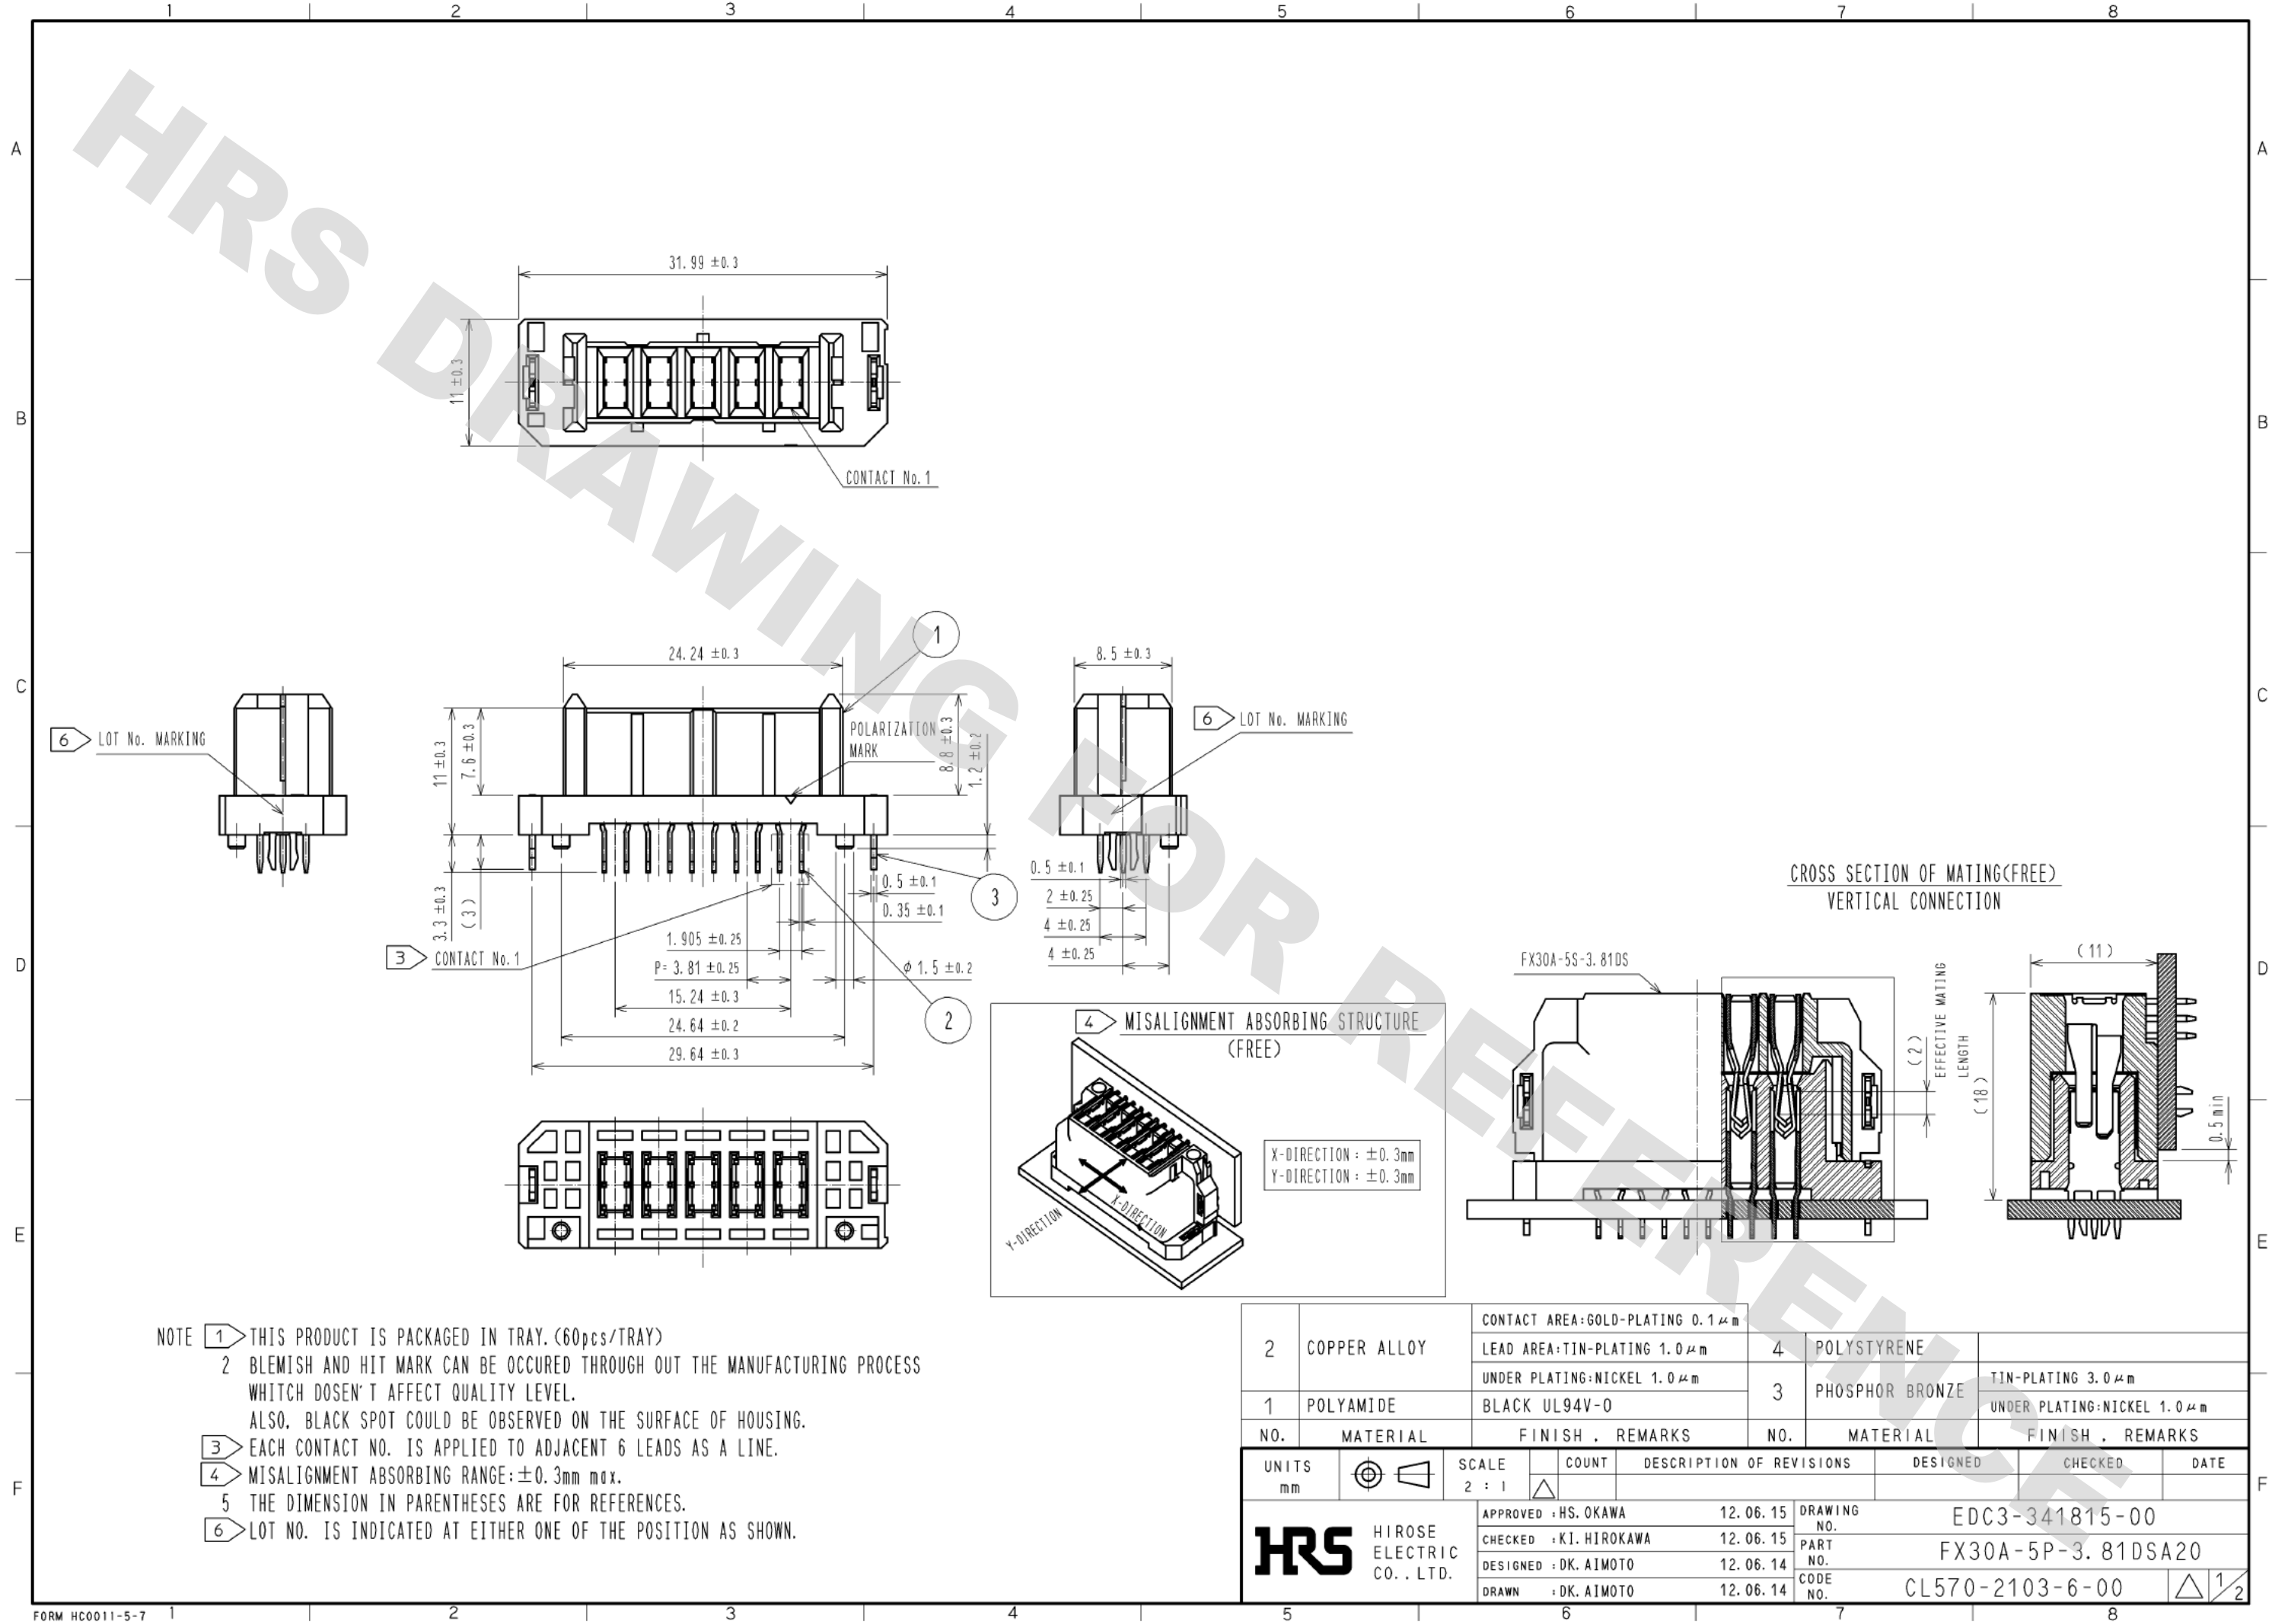

- NOTE 1 THIS PRODUCT IS PACKAGED IN TRAY. (60pcs/TRAY)
2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHITCH DOSEN'T AFFECT QUALITY LEVEL.
ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
3 EACH CONTACT NO. IS APPLIED TO ADJACENT 6 LEADS AS A LINE.
4 MISALIGNMENT ABSORBING RANGE: $\pm 0.3\text{mm}$ max.
5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
6 LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.

2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING $0.1\mu\text{m}$	4	POLYSTYRENE	
		LEAD AREA:TIN-PLATING $1.0\mu\text{m}$			
		UNDER PLATING:NICKEL $1.0\mu\text{m}$			
1	POLYAMIDE	BLACK UL94V-0	3	PHOSPHOR BRONZE	TIN-PLATING $3.0\mu\text{m}$
NO.		MATERIAL	FINISH . REMARKS		
UNITS		mm	SCALE	2 : 1	COUNT
			DESCRIPTION OF REVISIONS		DESIGNED
					CHECKED
					DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	12.06.15	DRAWING NO. EDC3-341815-00	
		CHECKED : KI. HIROKAWA	12.06.15	PART NO. FX30A-5P-3.81DSA20	
		DESIGNED : DK. AIMOTO	12.06.14	CODE NO. CL570-2103-6-00	
		DRAWN : DK. AIMOTO	12.06.14		

DRAWING FOR REFERENCE: This is subject to change without notice
05/31/2013

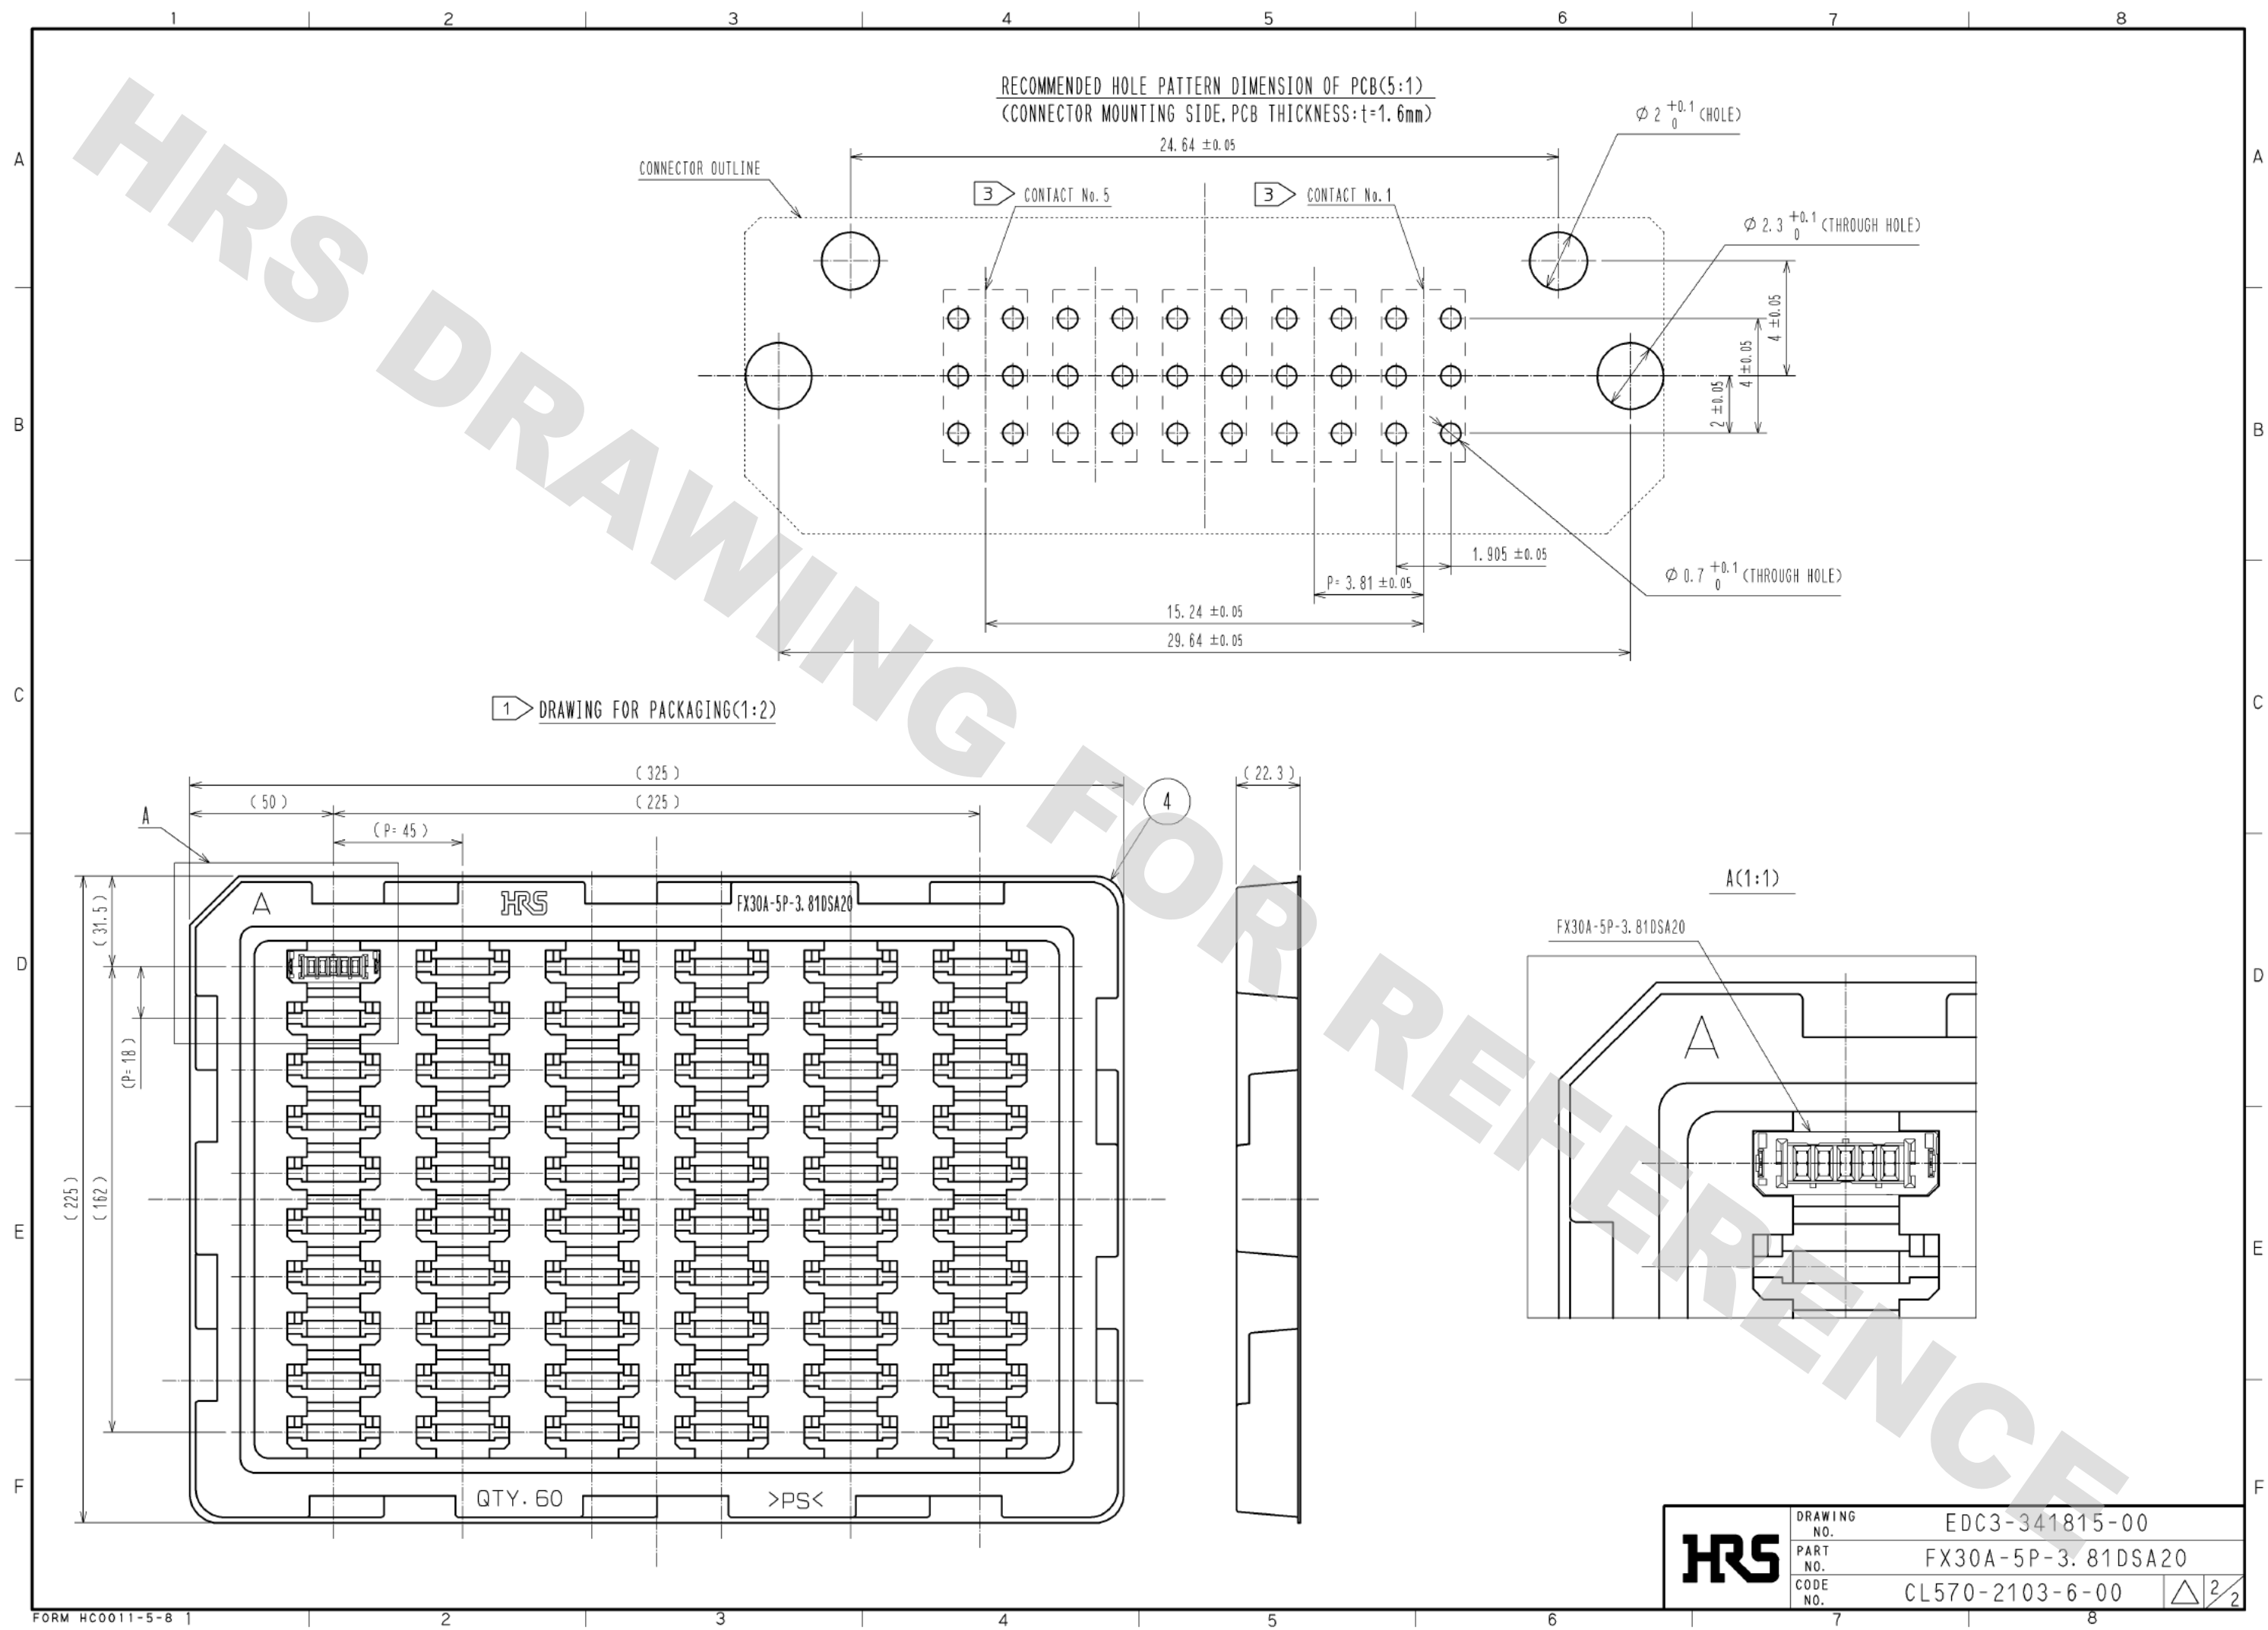

HRS	DRAWING NO.	EDC3-341815-00
	PART NO.	FX30A-5P-3.81DSA20
	CODE NO.	CL570-2103-6-00
		$\triangle$ 2/2