

30A, 20V - 150V Schottky Barrier Rectifier

FEATURES

- AEC-Q101 qualified available
- Low power loss, high efficiency
- Guard ring for overvoltage protection
- High surge current capability
- UL Recognized File # E-326243
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21


APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Monitor
- DC to DC converters
- TV


MECHANICAL DATA

- Case: TO-247AD (TO-3P)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Mounting torque: 1.13 N·m maximum
- Polarity: As marked
- Weight: 6.10g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
I_F	30	A
V_{RRM}	20 - 150	V
I_{FSM}	300	A
$T_{J\ MAX}$	125, 150	°C
Package	TO-247AD (TO-3P)	
Configuration	Dual dies	



TO-247AD (TO-3P)



ABSOLUTE MAXIMUM RATINGS (T _A = 25°C unless otherwise noted)										
PARAMETER	SYMBOL	SR 3020 PT	SR 3030 PT	SR 3040 PT	SR 3050 PT	SR 3060 PT	SR 3090 PT	SR 30100 PT	SR 30150 PT	UNIT
Marking code on the device		SR 3020 PT	SR 3030 PT	SR 3040 PT	SR 3050 PT	SR 3060 PT	SR 3090 PT	SR 30100 PT	SR 30150 PT	
Repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	90	100	150	V
Reverse voltage, total rms value	V _{R(RMS)}	14	21	28	35	42	63	70	105	V
Forward current	I _F	30								A
Surge peak forward current 8.3ms single half sine wave superimposed on rated load	I _{FSM}	300								A
Junction temperature	T _J	-55 to +125				-55 to +150				°C
Storage temperature	T _{STG}	-55 to +150								°C

THERMAL PERFORMANCE

PARAMETER	SYMBOL	TYP	UNIT
Junction-to-case thermal resistance	$R_{\theta JC}$	1.5	°C/W

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage per diode ⁽¹⁾	SR3020PT SR3030PT SR3040PT	V_F	-	0.55	V
	SR3050PT SR3060PT		-	0.70	V
	SR3090PT SR30100PT		-	0.90	V
	SR30150PT		-	1.00	V
Reverse current @ rated V_R per diode ⁽²⁾	SR3020PT SR3030PT SR3040PT SR3050PT SR3060PT	I_R	-	1000	μA
	SR3090PT SR30100PT SR30150PT		-	500	μA
	SR3020PT SR3030PT SR3040PT		-	20	mA
	SR3050PT SR3060PT		-	15	mA
	SR3090PT SR30100PT SR30150PT		-	10	mA

Notes:

1. Pulse test with $PW = 0.3\text{ms}$
2. Pulse test with $PW = 30\text{ms}$

ORDERING INFORMATION

ORDERING CODE ⁽¹⁾⁽²⁾	PACKAGE	PACKING
SR30xPT	TO-247AD (TO-3P)	30 / Tube
SR30xPTH	TO-247AD (TO-3P)	30 / Tube

Notes:

1. "x" defines voltage from 20V(SR3020PT) to 150V(SR30150PT)
2. "H" means AEC-Q101 qualified

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

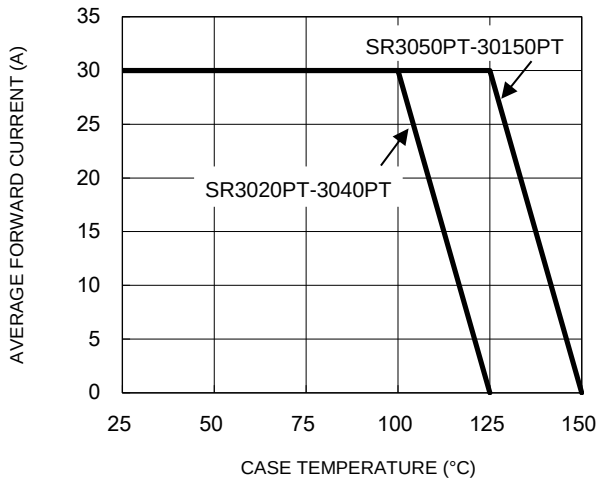


Fig.2 Typical Junction Capacitance

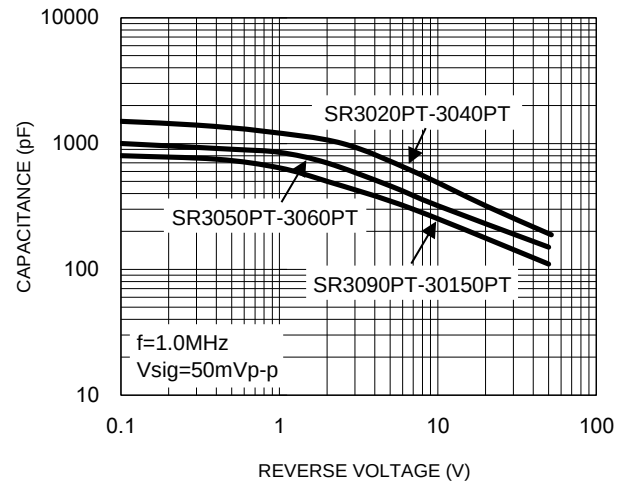


Fig.3 Typical Reverse Characteristics

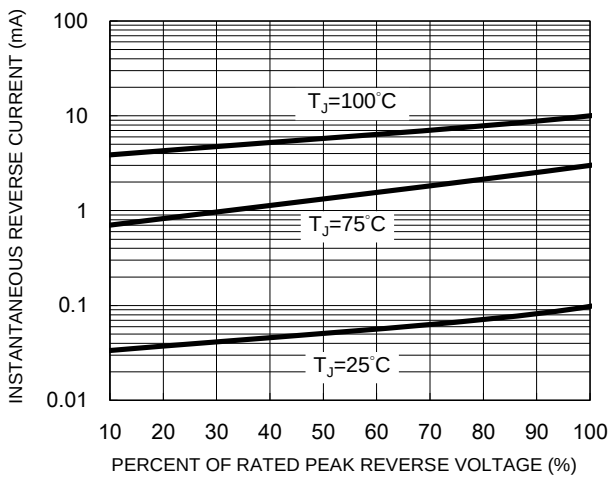


Fig.4 Typical Forward Characteristics


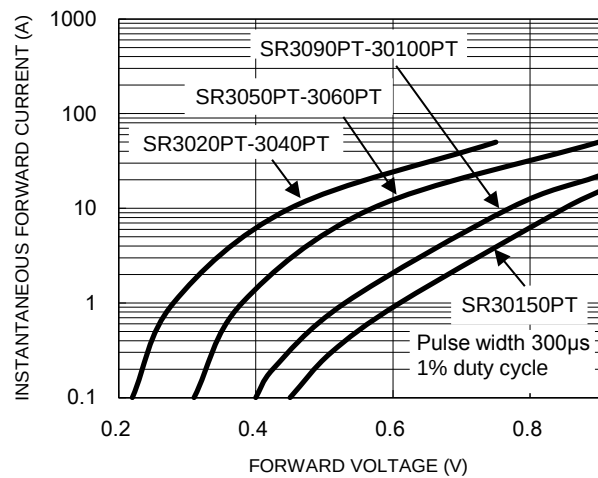



Fig.5 Maximum Non-Repetitive Forward Surge Current

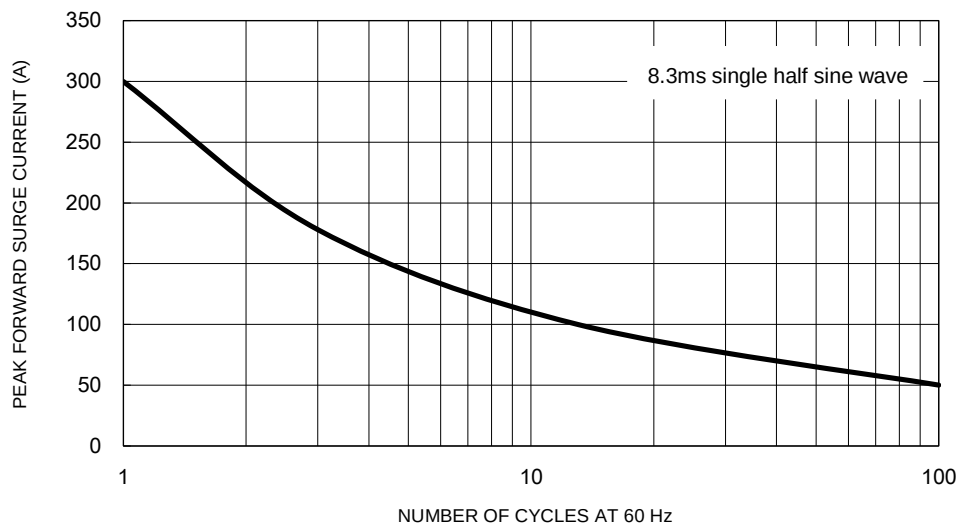


CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.6 Typical Transient Thermal Impedance

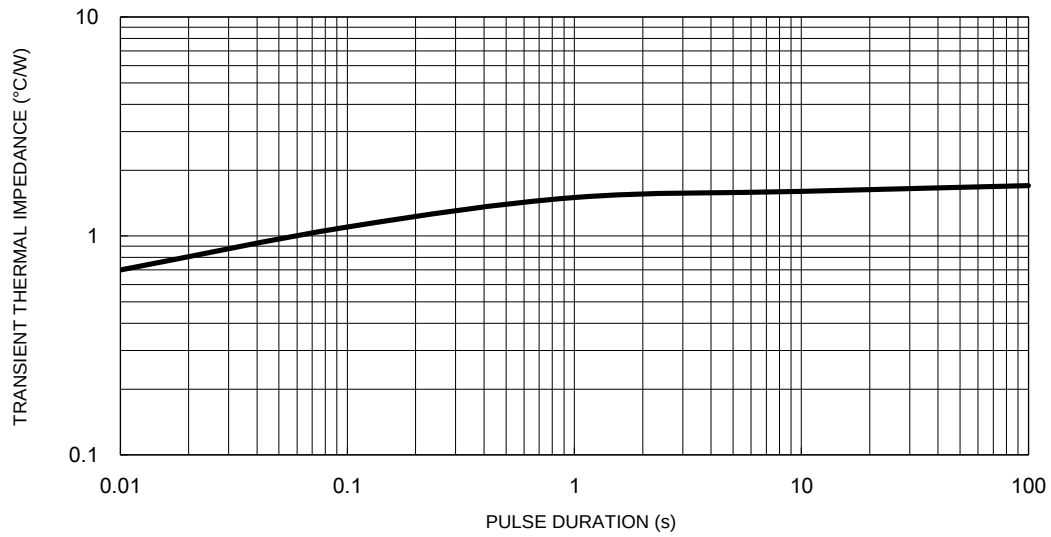

PACKAGE OUTLINE DIMENSIONS

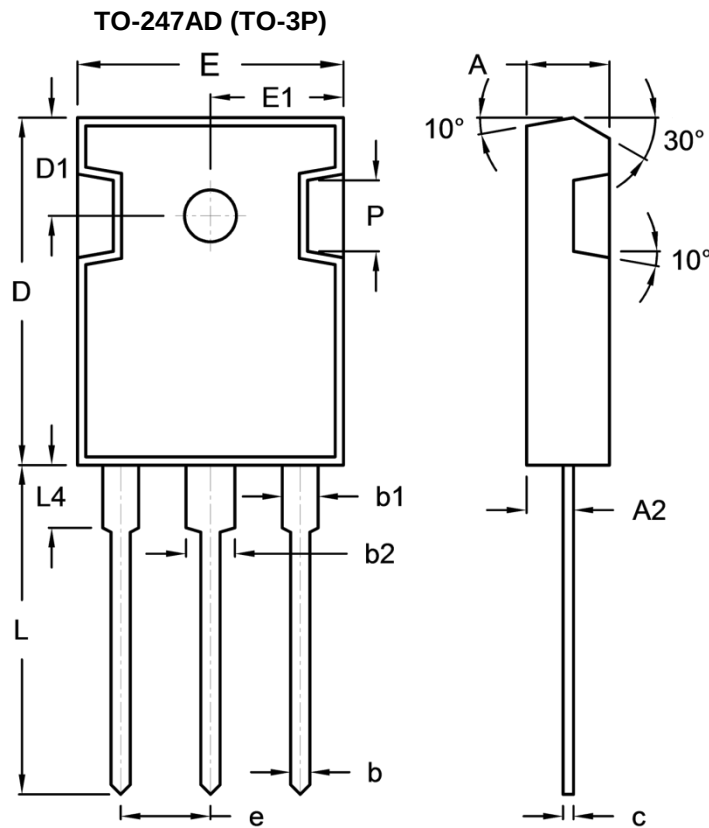

DIM	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	4.90	5.16	0.193	0.203
A2	2.70	3.00	0.106	0.118
b	1.12	1.22	0.044	0.048
b1	1.93	2.18	0.076	0.086
b2	2.97	3.22	0.117	0.127
c	0.51	0.76	0.020	0.030
D	20.80	21.30	0.819	0.839
D1	5.70	6.20	0.224	0.244
E	15.90	16.40	0.626	0.646
E1	7.90	8.20	0.311	0.323
e	5.20	5.70	0.205	0.224
H	2.90	3.40	0.114	0.134
L	19.70	20.20	0.776	0.795
L4	3.50	4.10	0.138	0.161
P	-	4.30	-	0.169

MARKING DIAGRAM



P/N = Marking Code
 G = Green Compound
 YWW = Date Code
 F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.