


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	86		H	REVISED PER ECO-11-017193	12OCT11	PY	BW

D


C

B

A

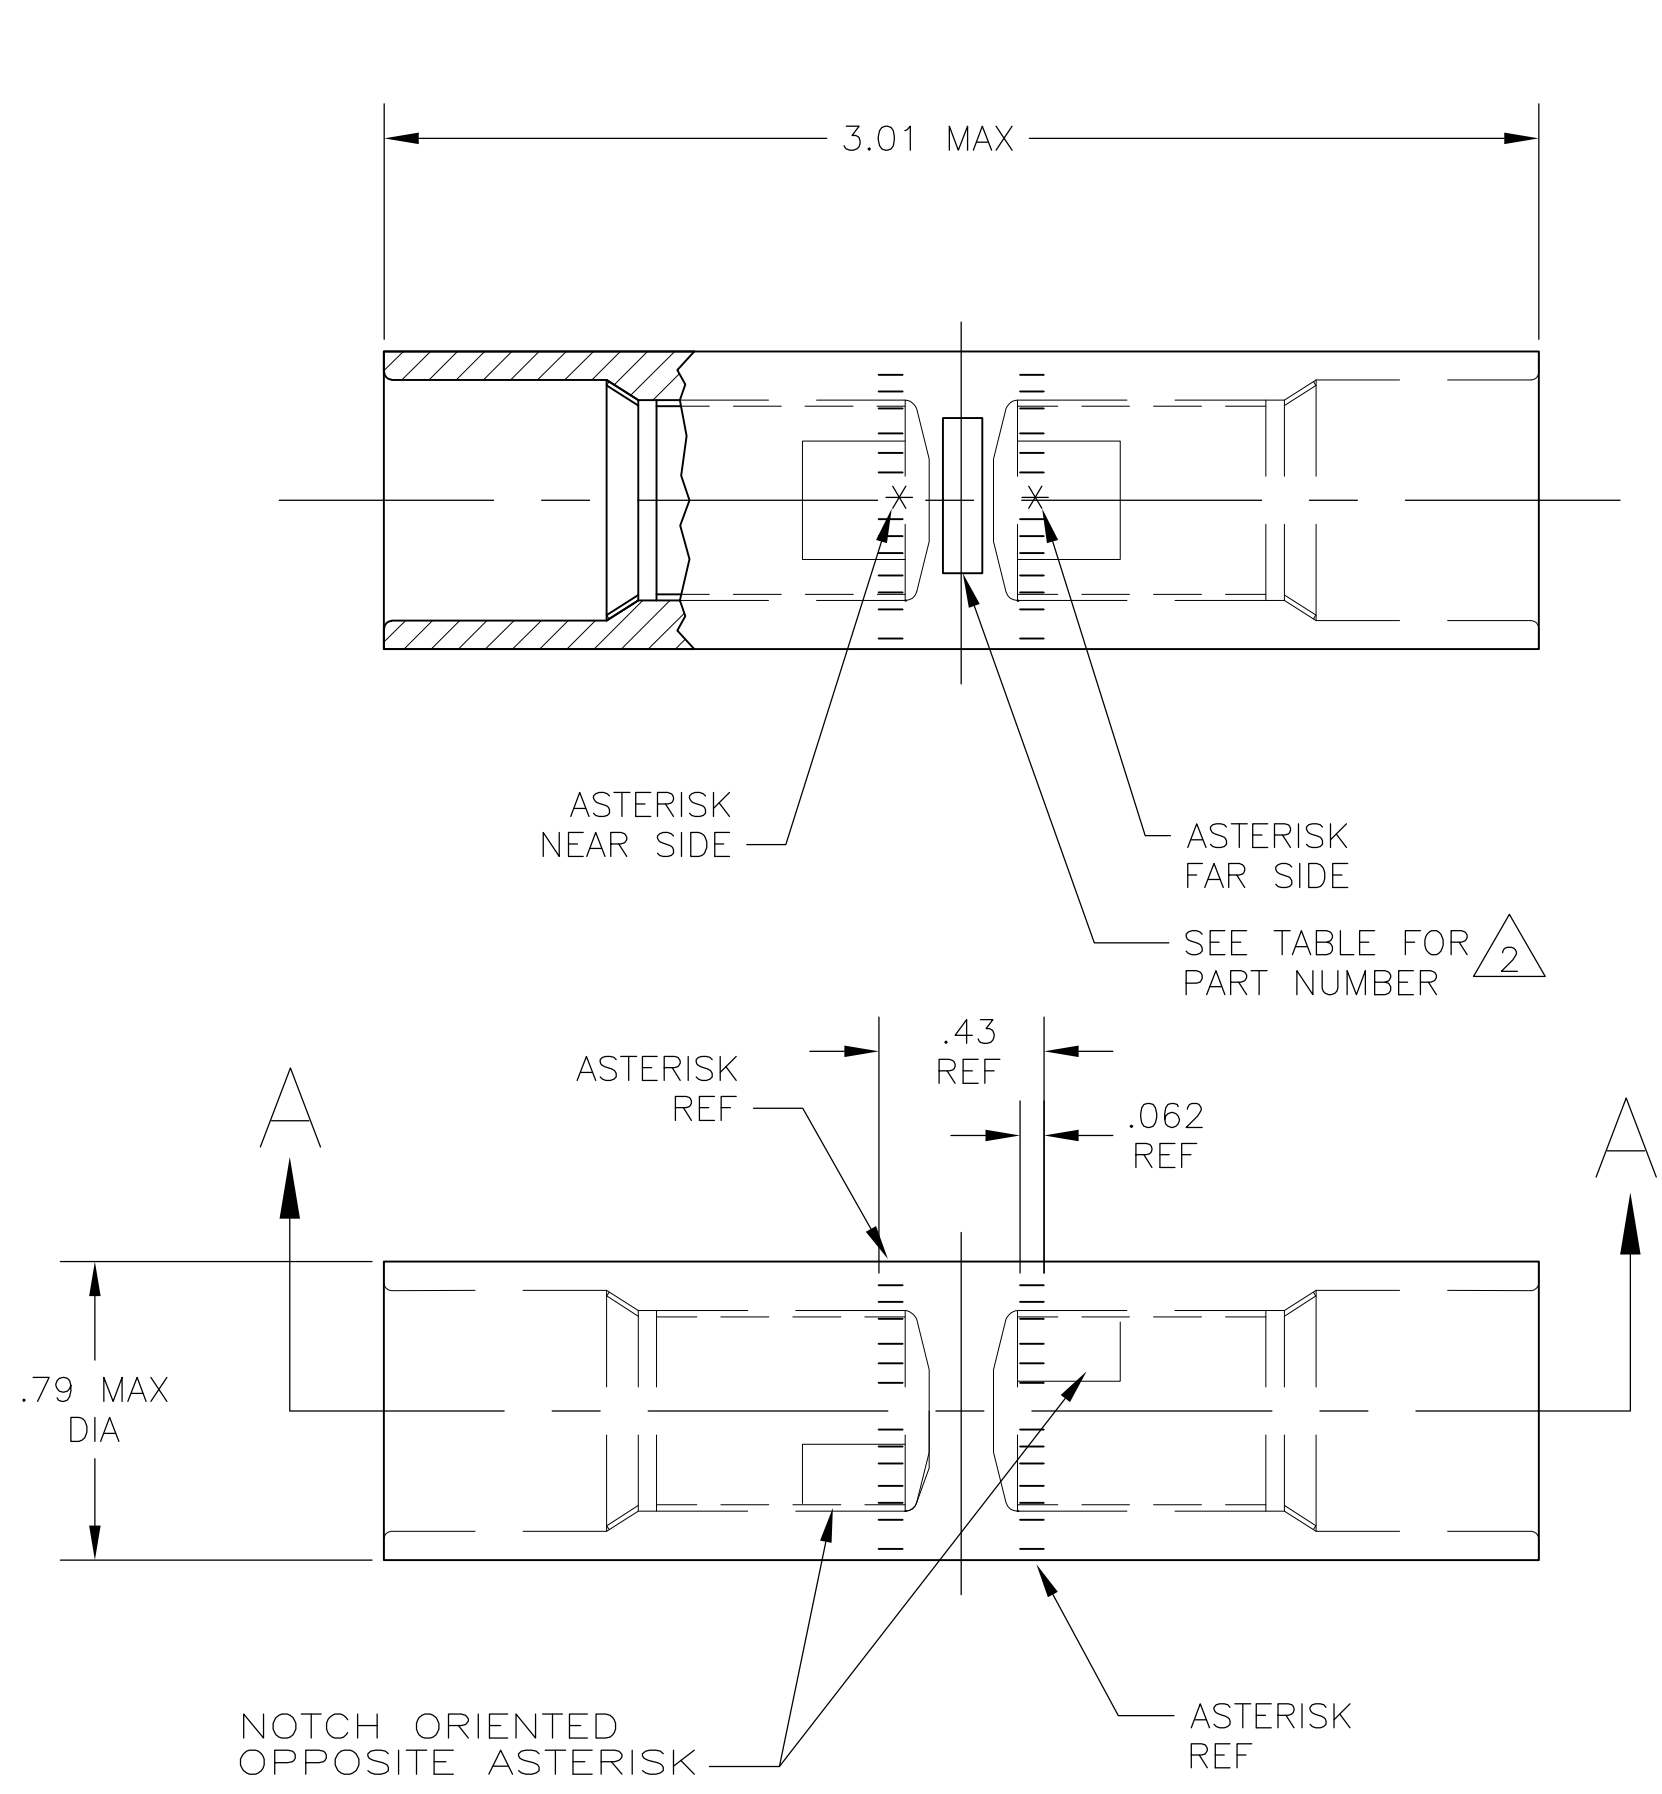


- 1 WIRE INSULATION: .501—.553 DIA
- 2 STAMP " 696861-x AMP 2/OAL-1/OCU 13-78" SIZE AND LOCATION APPROX AS SHOWN

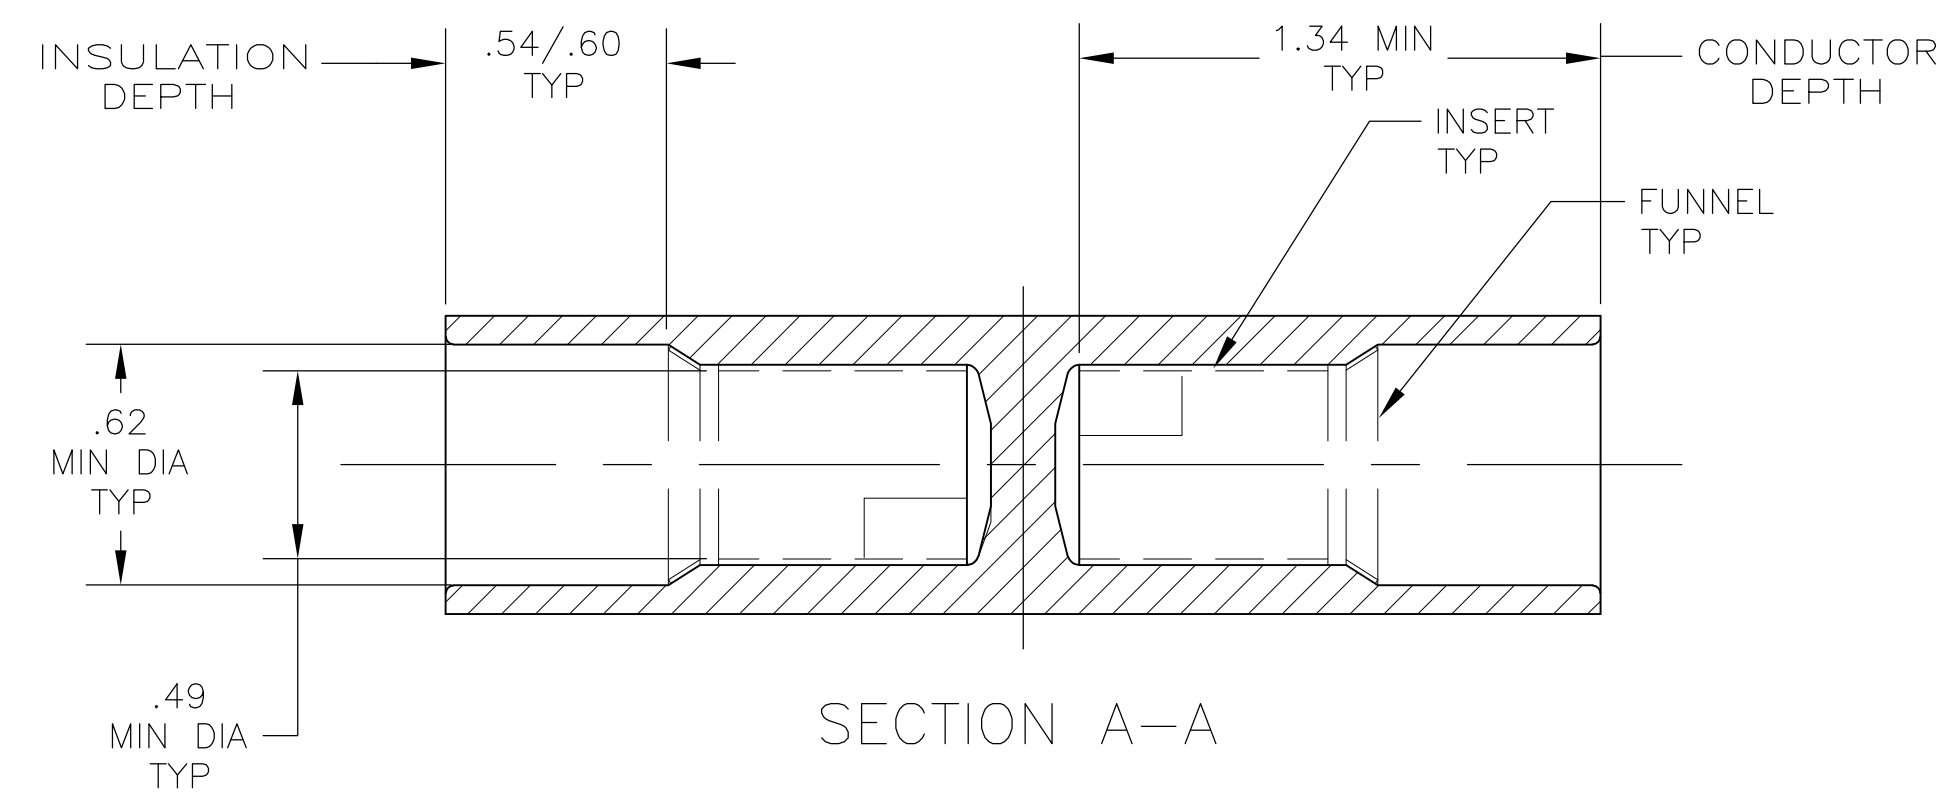

SECTION A-A

BODY: COPPER ASTM B-187 TIN PL PER ASTM B-545 .000150 MIN THK	696861-1
INSERT & FUNNEL: BRASS ASTM B36 NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	
MATERIAL AND FINISH	
	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 27OCT05	 TE Connectivity			
DIMENSIONS: MM [INCHES]		CHK MS FEHER 27OCT05				
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .008 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD MJ SPICER 27OCT05	NAME WIRE SPLICE, BUTT, SEALED COPALUM 2/O AL - 1/O CU			
		PRODUCT SPEC —				
		APPLICATION SPEC —				
		—				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT 107 GRAMS	SIZE A2	CAGE CODE 00779	DRAWING NO C-696861	RESTRICTED TO —
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 of 1	REV H	

696861

A